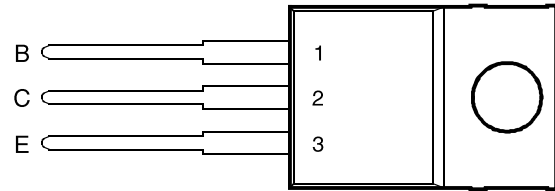


- **Rugged Triple-Diffused Planar Construction**
- **4 A Continuous Collector Current**
- **Operating Characteristics Fully Guaranteed at 100°C**
- **1000 Volt Blocking Capability**

 TO-220 PACKAGE
(TOP VIEW)


Pin 2 is in electrical contact with the mounting base.

absolute maximum ratings **at 25°C case temperature (unless otherwise noted)**

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ($I_E = 0$)	TIPL791	V_{CBO}	850	V
	TIPL791A		1000	
Collector-emitter voltage ($V_{BE} = 0$)	TIPL791	V_{CES}	850	V
	TIPL791A		1000	
Collector-emitter voltage ($I_B = 0$)	TIPL791	V_{CEO}	400	V
	TIPL791A		450	
Emitter-base voltage		V_{EBO}	10	V
Continuous collector current		I_C	4	A
Peak collector current (see Note 1)		I_{CM}	8	A
Continuous device dissipation at (or below) 25°C case temperature		P_{tot}	75	W
Operating junction temperature range		T_j	-65 to +150	°C
Storage temperature range		T_{stg}	-65 to +150	°C

NOTE 1: This value applies for $t_p \leq 10$ ms, duty cycle $\leq 2\%$.

TIPL791, TIPL791A

NPN SILICON POWER TRANSISTORS

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{CEO(sus)}$ Collector-emitter sustaining voltage	$I_C = 100\text{ mA}$	$L = 25\text{ mH}$	(see Note 2)	TIPL791 400 TIPL791A 450			V
I_{CES} Collector-emitter cut-off current	$V_{CE} = 850\text{ V}$	$V_{BE} = 0$		TIPL791		5	μA
	$V_{CE} = 1000\text{ V}$	$V_{BE} = 0$		TIPL791A		5	
	$V_{CE} = 850\text{ V}$	$V_{BE} = 0$	$T_C = 100^\circ\text{C}$	TIPL791		200	
	$V_{CE} = 1000\text{ V}$	$V_{BE} = 0$	$T_C = 100^\circ\text{C}$	TIPL791A		200	
I_{CEO} Collector cut-off current	$V_{CE} = 400\text{ V}$	$I_B = 0$		TIPL791		5	μA
	$V_{CE} = 450\text{ V}$	$I_B = 0$		TIPL791A		5	
I_{EBO} Emitter cut-off current	$V_{EB} = 10\text{ V}$	$I_C = 0$				1	mA
h_{FE} Forward current transfer ratio	$V_{CE} = 5\text{ V}$	$I_C = 0.5\text{ A}$	(see Notes 3 and 4)	20		60	
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = 0.2\text{ A}$	$I_C = 1\text{ A}$				0.5	V
	$I_B = 0.5\text{ A}$	$I_C = 2.5\text{ A}$	(see Notes 3 and 4)			1.0	
	$I_B = 1\text{ A}$	$I_C = 4\text{ A}$				2.5	
	$I_B = 1\text{ A}$	$I_C = 4\text{ A}$	$T_C = 100^\circ\text{C}$			5.0	
$V_{BE(sat)}$ Base-emitter saturation voltage	$I_B = 0.2\text{ A}$	$I_C = 1\text{ A}$				1.0	V
	$I_B = 0.5\text{ A}$	$I_C = 2.5\text{ A}$	(see Notes 3 and 4)			1.2	
	$I_B = 1\text{ A}$	$I_C = 4\text{ A}$				1.4	
	$I_B = 1\text{ A}$	$I_C = 4\text{ A}$	$T_C = 100^\circ\text{C}$			1.3	
f_t Current gain bandwidth product	$V_{CE} = 10\text{ V}$	$I_C = 0.5\text{ A}$	$f = 1\text{ MHz}$		12		MHz
C_{ob} Output capacitance	$V_{CB} = 20\text{ V}$	$I_E = 0$	$f = 0.1\text{ MHz}$		110		pF

NOTES: 2. Inductive loop switching measurement.

3. These parameters must be measured using pulse techniques, $t_p = 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.

4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.66	$^\circ\text{C/W}$

inductive-load-switching characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{sv} Voltage storage time	$I_C = 4\text{ A}$ $V_{BE(off)} = -5\text{ V}$	$I_{B(on)} = 0.8\text{ A}$	(see Figures 1 and 2)			2	μs
t_{rv} Voltage rise time						200	ns
t_{fi} Current fall time						100	ns
t_{ti} Current tail time						50	ns
t_{xo} Cross over time						200	ns
t_{sv} Voltage storage time	$I_C = 4\text{ A}$ $V_{BE(off)} = -5\text{ V}$	$I_{B(on)} = 0.8\text{ A}$ $T_C = 100^\circ\text{C}$	(see Figures 1 and 2)			2.5	μs
t_{rv} Voltage rise time						400	ns
t_{fi} Current fall time						200	ns
t_{ti} Current tail time						50	ns
t_{xo} Cross over time						600	ns

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

TIPL791, TIPL791A
NPN SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

TYPICAL DC CURRENT GAIN
 VS
 COLLECTOR CURRENT

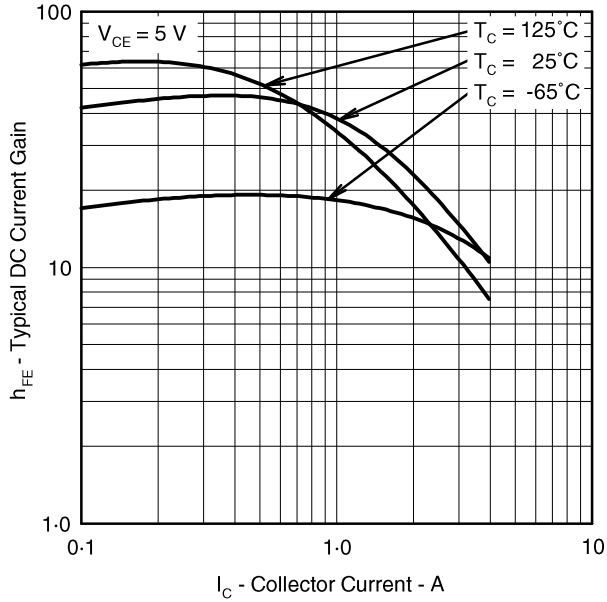


Figure 3.

COLLECTOR-EMITTER SATURATION VOLTAGE
 VS
 BASE CURRENT

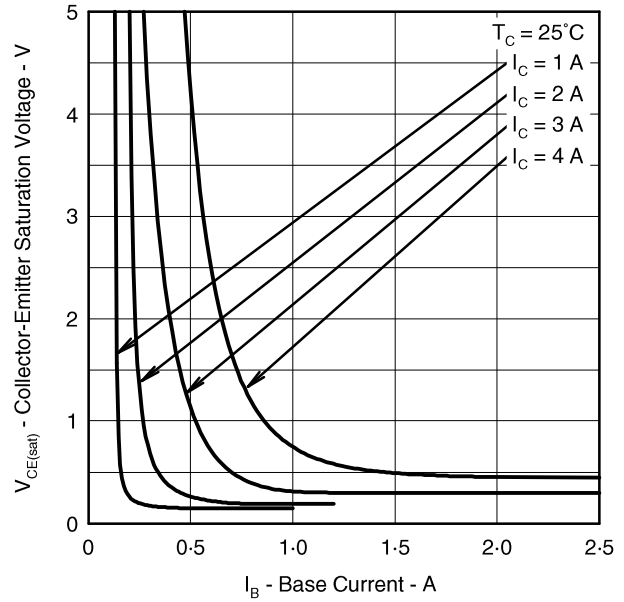


Figure 4.

MAXIMUM SAFE OPERATING REGIONS

MAXIMUM FORWARD-BIAS
 SAFE OPERATING AREA


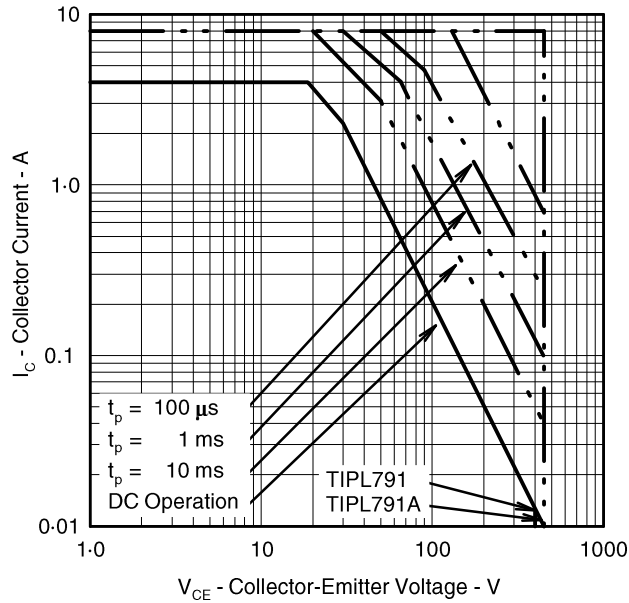


Figure 5.

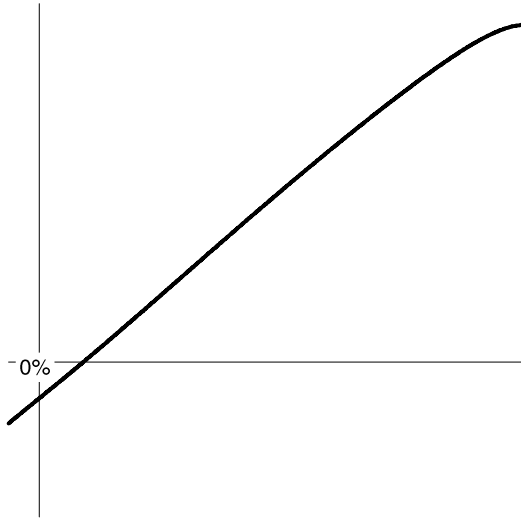


TIPL791, TIPL791A
NPN SILICON POWER TRANSISTORS

MECHANICAL DATA

TO-220

3-pin plastic flange-mount package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.

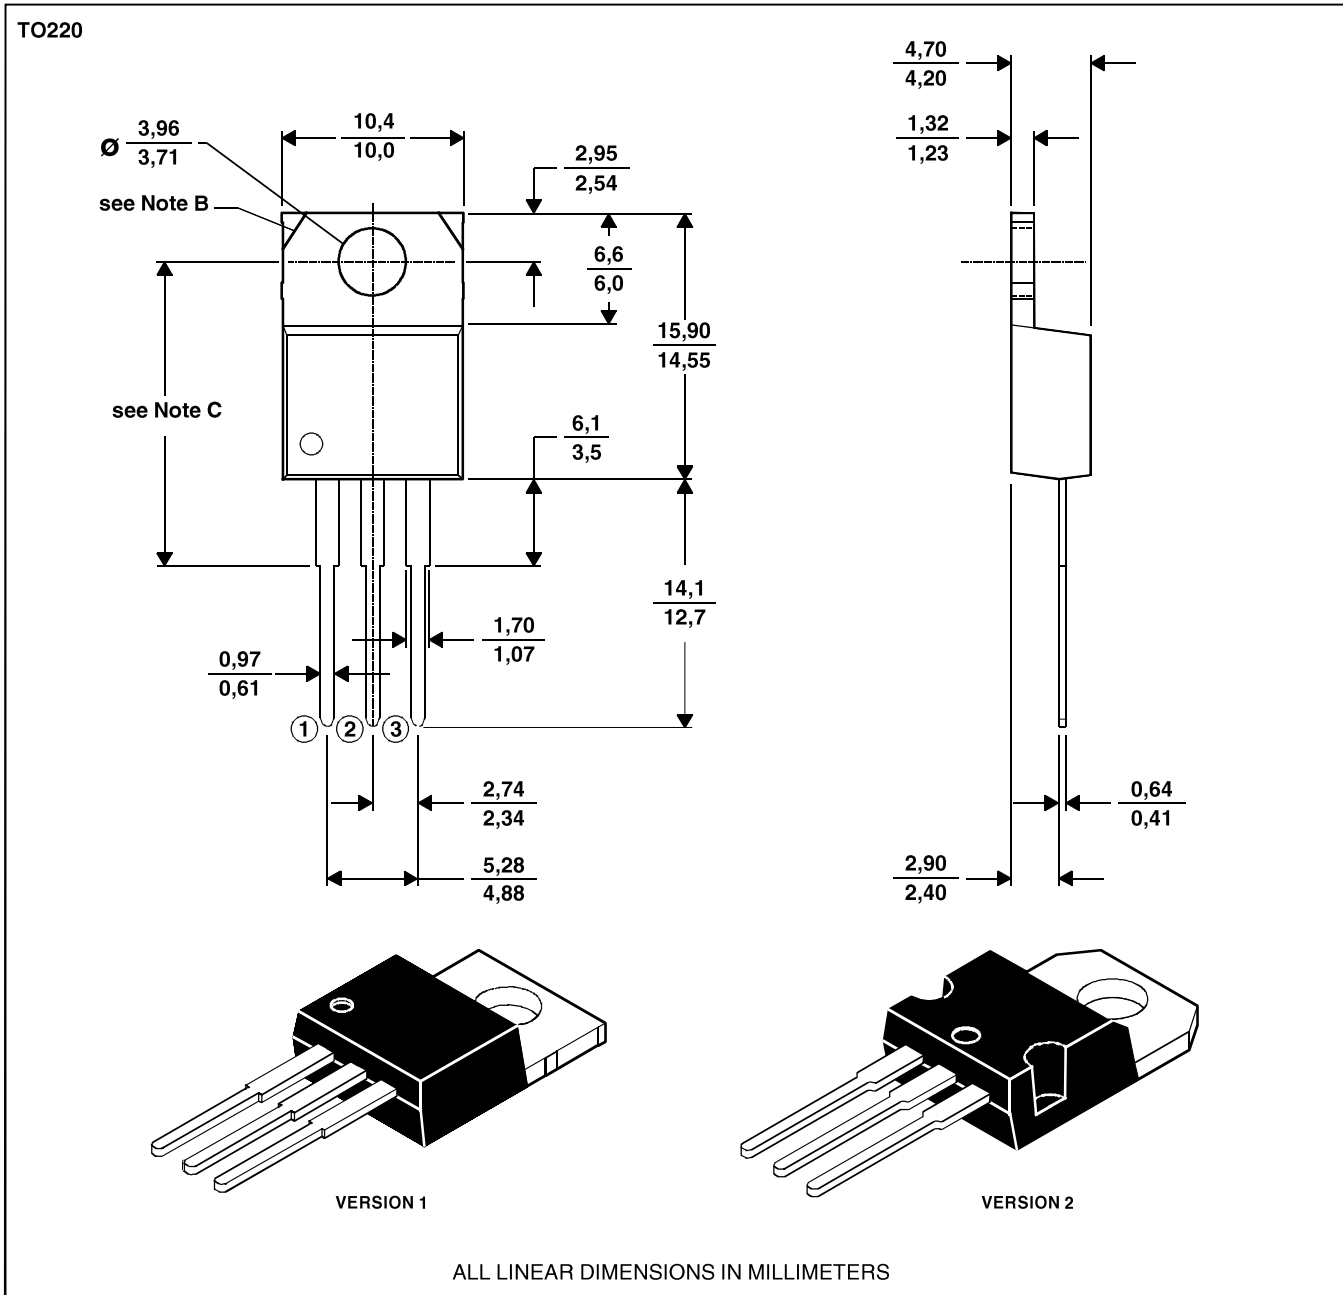

- NOTES: A. The centre pin is in electrical contact with the mounting tab.
 B. Mounting tab corner profile according to package version.
 C. Typical fixing hole centre stand off height according to package version.
 Version 1, 18.0 mm. Version 2, 17.6 mm.