


# Transistors

## BC637

### SWITCHING AND AMPLIFIER APPLICATIONS

### ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Characteristic	Symbol	Rating	Unit
Collector Emitter Voltage at $R_{BE} = 1\text{Kohm}$	$V_{CER}$	60	V
Collector Emitter Voltage	$V_{CES}$	60	V
Collector Emitter Voltage	$V_{CEO}$	60	V
Emitter Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	1	A
Peak Collector Current	$I_{CP}$	1.5	A
Base Current	$I_B$	100	mA
Collector Dissipation	$P_c$	1	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-65~150	$^\circ\text{C}$

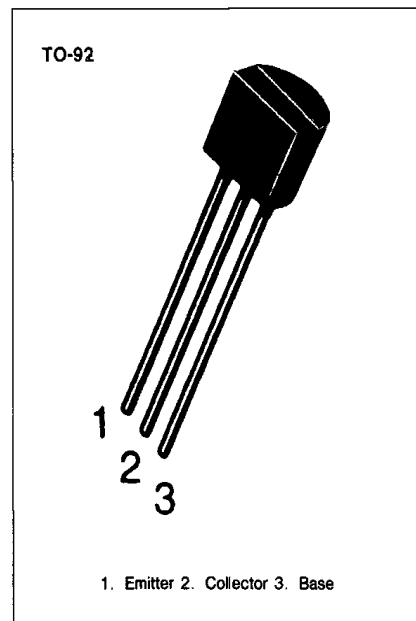


\* PW = 5mS, Duty Cycle = 10%

### ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )


Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Emitter Breakdown Voltage	$BV_{CEO}$	$I_C = 10\text{mA}, I_B = 0$	60			V
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 30\text{V}, I_E = 0$			0.1	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 5\text{V}, I_C = 0$			0.1	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE} = 2\text{V}, I_C = 5\text{mA}$	25			
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$	40		160	
Base Emitter On Voltage	$V_{BE(on)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	25		0.5	V
Current Gain Bandwidth Product	$f_T$	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$		100	1	V
		$V_{CE} = 5\text{V}, I_C = 10\text{mA}, f = 50\text{MHz}$				MHz




**STATIC CHARACTERISTIC**

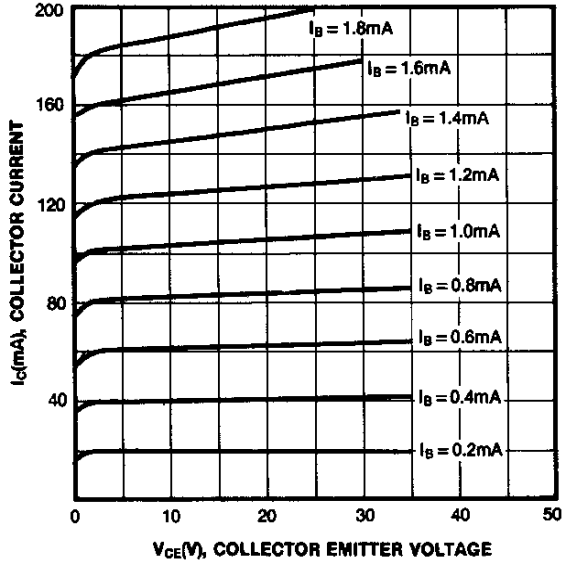


**DC CURRENT GAIN**

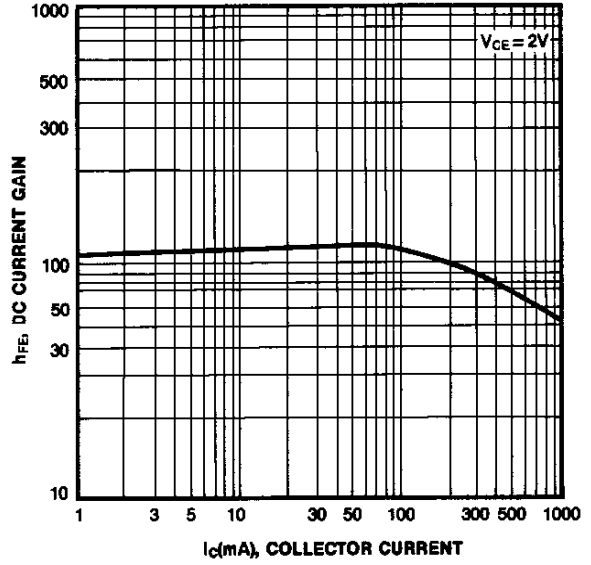

**BASE EMITTER SATURATION VOLTAGE  
COLLECTOR EMITTER SATURATION VOLTAGE**

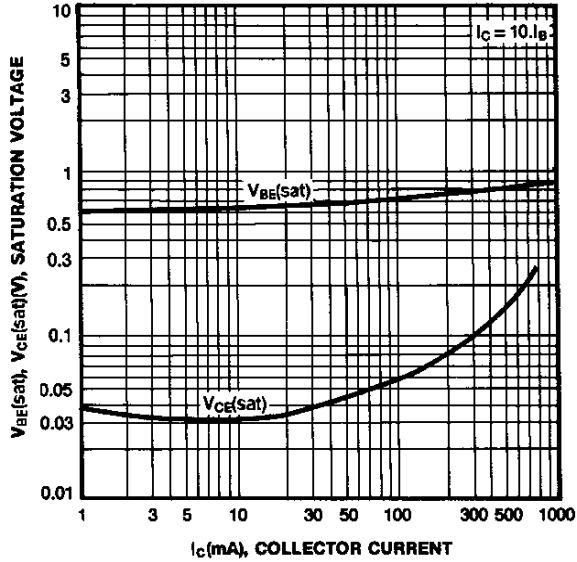

**BASE EMITTER ON VOLTAGE**

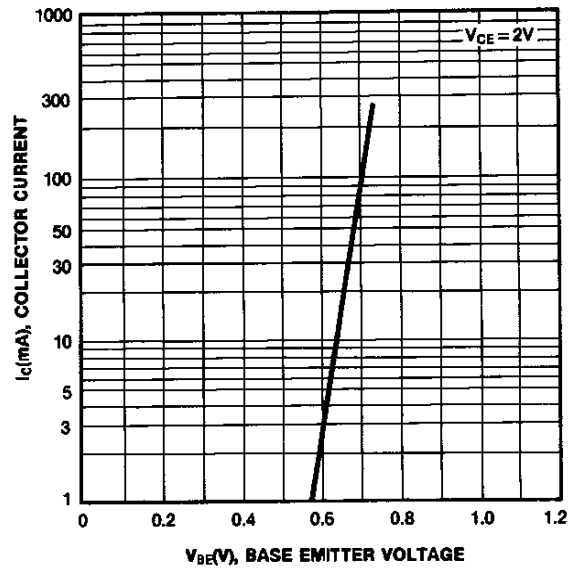

**COLLECTOR OUTPUT CAPACITANCE**

