

Thyristors

T40



Technical Data

Typical applications : D.C. Motor control, Controlled rectifiers, A.C. Controllers

Type No.	V _{RRM} (Volts)	V _{RSM} (Volts)
T40/04	400	500
T40/06	600	700
T40/08	800	900
T40/10	1000	1100
T40/12	1200	1300
T40/14	1400	1500
T40/16	1600	1700






Features





- Hermetic glass to metal seal
- Voltage grade upto 1600V
- Weight 22 gm (Approx)

Symbol	Conditions	Values
I _{T(AV)}	Sin 180 ; T _{case} = 85 °C	40 A
I _{TSM}	T _{vj} = 25 °C T _{vj} = 130 °C	700 A 600 A
I ² t	T _{vj} = 25 °C T _{vj} = 130 °C	2500 A ² s 1800 A ² s
I _{GT} V _{GT} dv/dt [di/dt] _{CR}	T _{vj} = 25 °C; V _{DRM} = 5V T _{vj} = 25 °C; V _{DRM} = 5V T _{vj} = 125 °C ; Voltage = 67 % V _{DRM}	150 mA 3V *200 V/μs 50 A/μs
V _T V ₀ R ₀ I _{RRM} /I _{DRM}	T _{vj} = 25 °C ; I _T = 120A T _{vj} = 130 °C T _{vj} = 130 °C T _{vj} = 130 °C	1.95 V max 1.0V 9 m 8 mA
I _H I _L		Typ 100 mA; max. 200 mA Typ 250 mA; max. 400 mA
R _{th(j-c)} R _{th(c-h)} T _{vj} T _{stg}	Cont. Sin 180 / rec. 120	0.60 °C/W 0.66 / 0.70 °C/W 0.20 °C/W + 130 °C -40.....+ 150 °C
Mounting torque		4 Nm
Case outline		L

* Higher dv/dt selection available on request



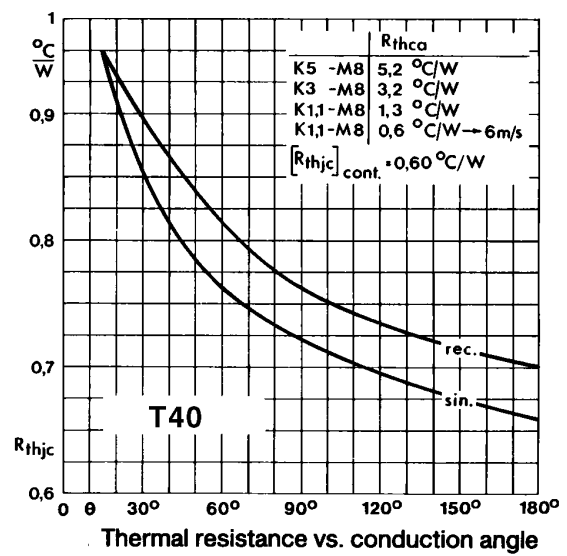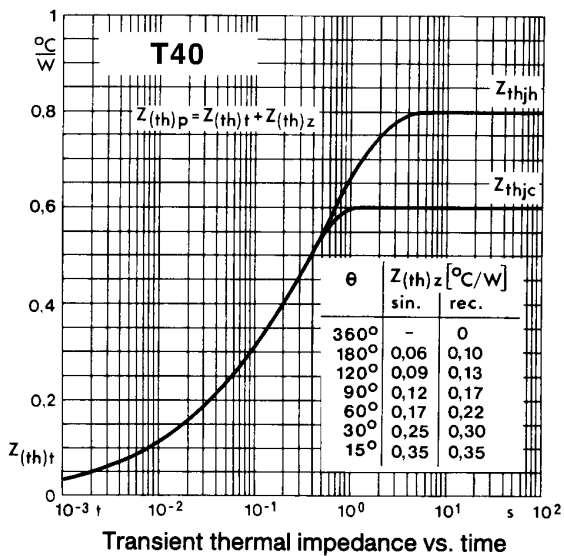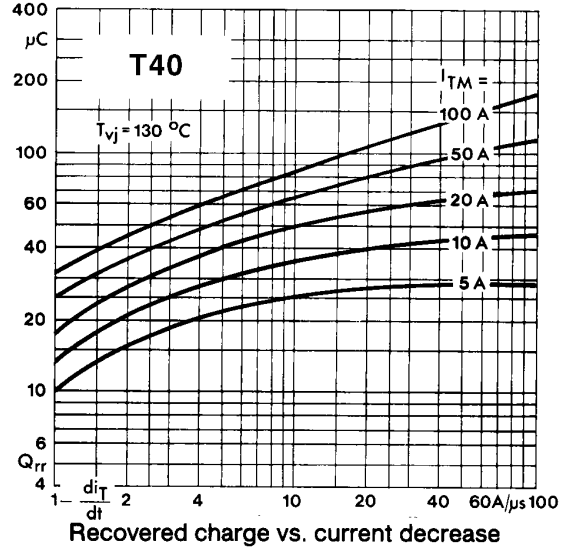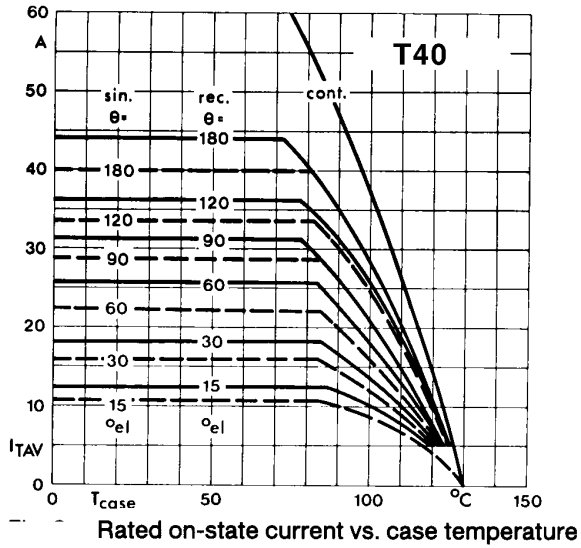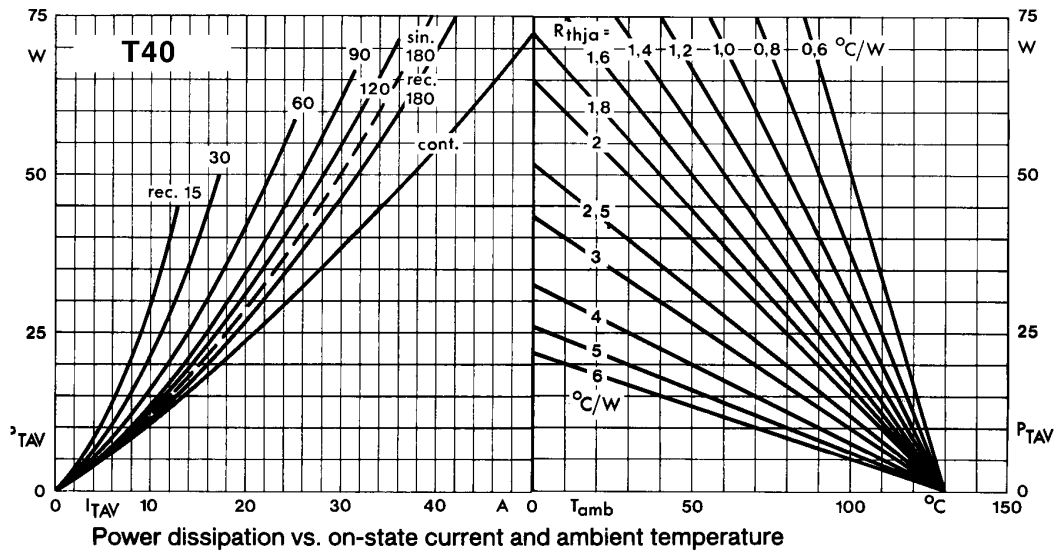


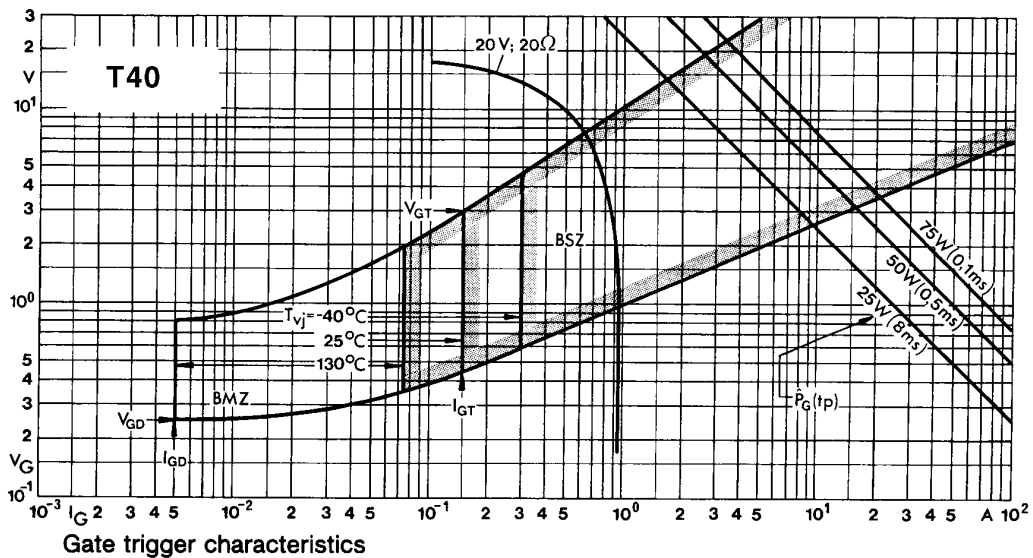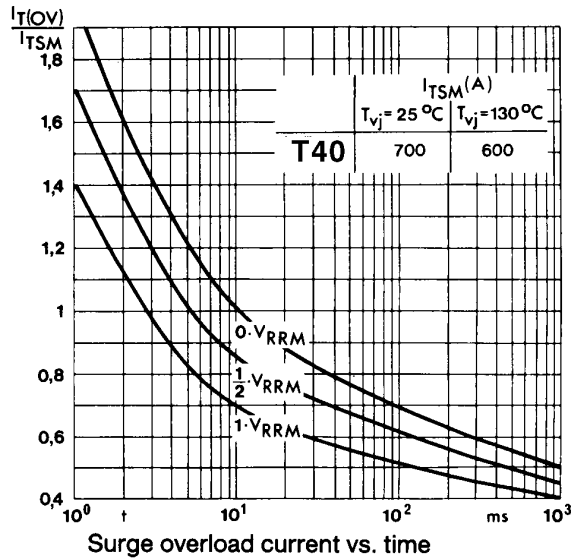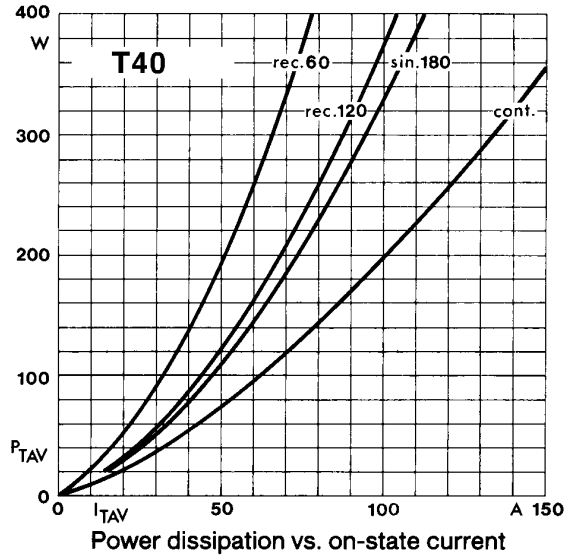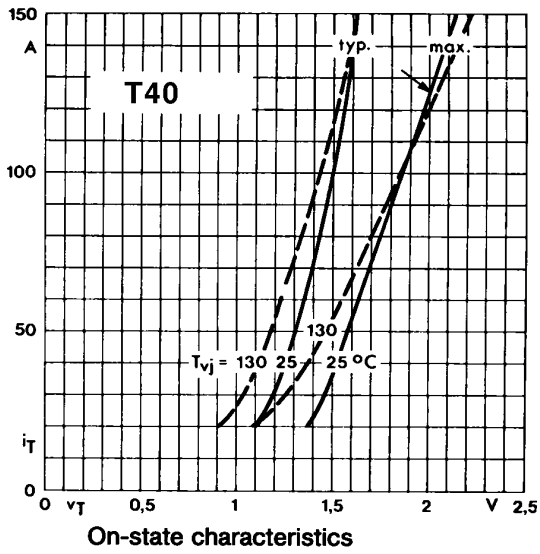

PACAKAGE DEATILS

DO NOT SCALE

All Dimensions in mm

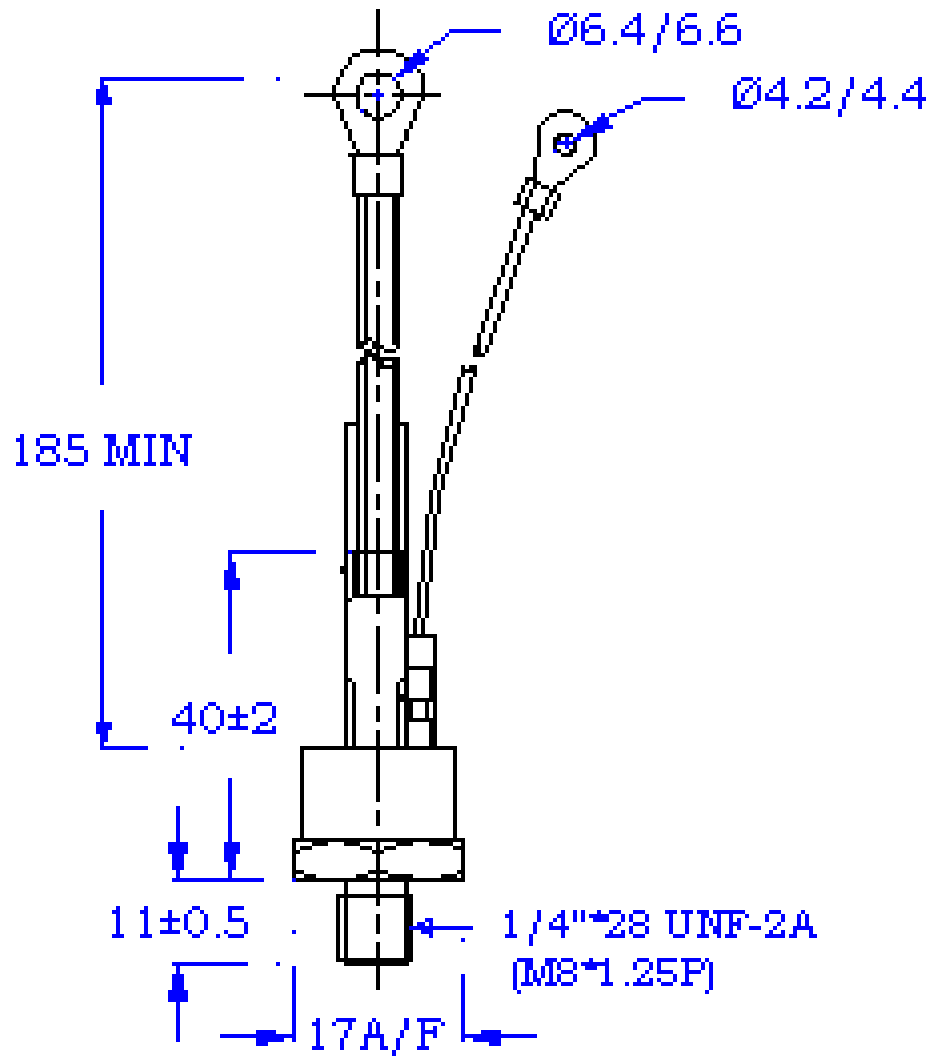

Mounting Torque :4Nm L