

Transistors

USP8599


AMPLIFIER TRANSISTOR

• Collector-Emitter Voltage: V_{CE0} : 80V

• Collector Dissipation: P_C (max)=625mW

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-80	V
Collector-Emitter Voltage	V_{CE0}	-80	V
Emitter-Base Voltage	V_{EB0}	-5	V
Collector Current	I_C	-500	mA
Collector Dissipation	P_C	625	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~150	$^\circ\text{C}$

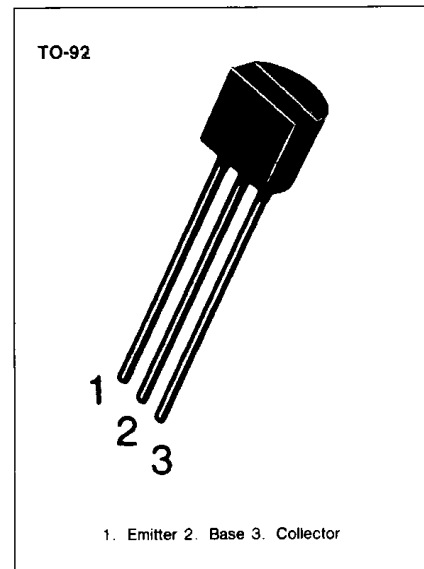

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

Characteristic	Symbol	Test Conditions	Min	Max	Unit
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C=-100\mu\text{A}, I_E=0$	-80		V
* Collector-Emitter Breakdown Voltage	BV_{CE0}	$I_C=-10\text{mA}, I_B=0$	-80		V
Emitter-Base Breakdown Voltage	BV_{EB0}	$I_E=-10\mu\text{A}, I_C=0$	-5		V
Collector Cut-off Current	I_{CB0}	$V_{CB}=-80\text{V}, I_E=0$		-100	nA
Collector Cut-off Current	I_{CE0}	$V_{CE}=-60\text{V}, I_B=0$		-100	nA
Emitter Cut-off Current	I_{EB0}	$V_{EB}=-4\text{V}, I_C=0$		-100	nA
* DC Current Gain	h_{FE}	$V_{CE}=-5\text{V}, I_C=-1\text{mA}$	100	300	
		$V_{CE}=-5\text{V}, I_C=-10\text{mA}$	100		
* Collector-Emitter Saturation Voltage	$V_{CE}(\text{sat})$	$V_{CE}=-5\text{V}, I_C=-100\text{mA}$	75		
		$I_C=-100\text{mA}, I_B=-5\text{mA}$		-0.4	V
* Base-Emitter On Voltage	$V_{BE}(\text{on})$	$I_C=-100\text{mA}, I_B=-10\text{mA}$		-0.3	V
		$V_{CE}=-5\text{V}, I_C=-10\text{mA}$	-0.6	-0.8	V
Current Gain Bandwidth Product	f_T	$V_{CE}=-5\text{V}, I_C=-10\text{mA}$ $f=100\text{MHz}$	150		MHz
Output Capacitance	C_{OB}	$V_{CB}=-5\text{V}, I_E=0$ $f=1\text{MHz}$		8	pF

* Pulse Test: $PW=300\mu\text{s}$, Duty Cycle=2%

