



FEATURES

- Fast access time : 12/15 ns (max.)
- Low operating power consumption : 60 mA (typical)
- Power Supply range 3.1V to 3.6V
- All inputs and outputs TTL compatible
- Fully static operation
- Three state outputs
- Package : 32-pin 300 mil skinny PDIP
32-pin 300 mil SOJ
32-pin 450mil SOP
32-pin 8mm x 20mm TSOP-1
32-pin 8mm x 13.4mm STSOP


GENERAL DESCRIPTION

The UT61L1024 is a 1,048,576-bit high-speed CMOS static random access memory organized as 131,072 words by 8 bits. It is fabricated using high performance, high reliability CMOS technology.


The UT61L1024 is designed for high-speed system applications. It is particularly suited for use in high-density high-speed system applications.

The UT61L1024 operates from a single 3.3V power supply and all inputs and outputs are fully TTL compatible.

FUNCTIONAL BLOCK DIAGRAM

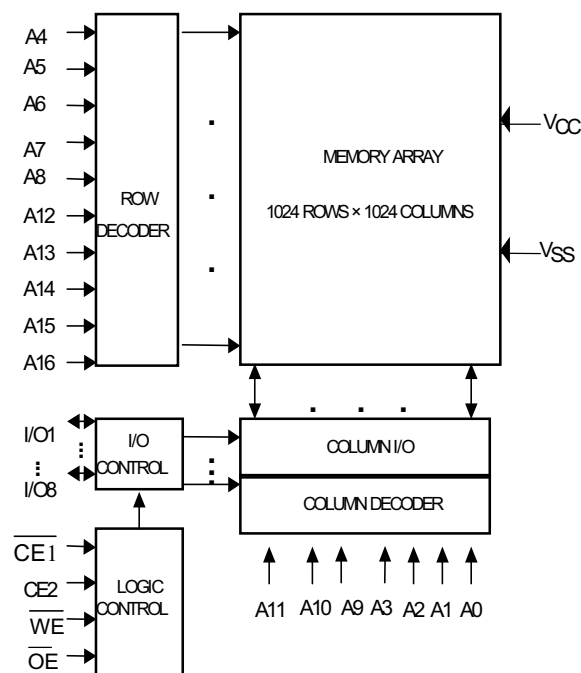


PIN CONFIGURATION

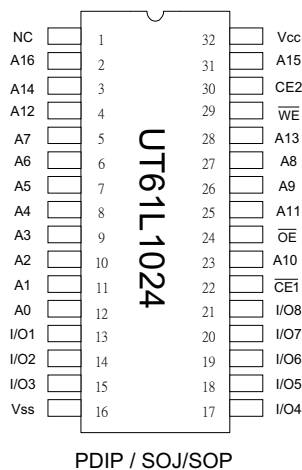

PIN DESCRIPTION

SYMBOL	DESCRIPTION
A0 - A16	Address Inputs
I/O1 - I/O8	Data Inputs/Outputs
CE1, CE2	Chip enable 1,2 Inputs
WE	Write Enable Input
OE	Output Enable Input
V _{CC}	Power Supply
V _{SS}	Ground
NC	No Connection

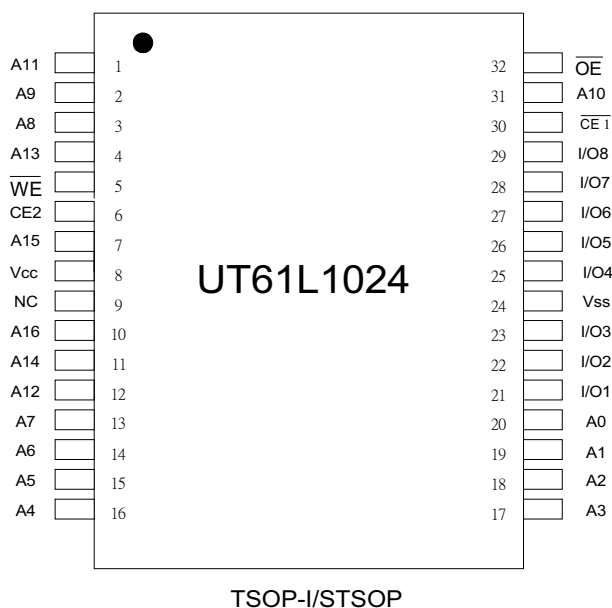

**ABSOLUTE MAXIMUM RATINGS***

PARAMETER	SYMBOL	RATING	UNIT
Terminal Voltage with Respect to V _{SS}	V _{TERM}	-0.5 to +4.6	V
Operating Temperature	T _A	0 to +70	°C
Storage Temperature	T _{STG}	-65 to +150	°C
Power Dissipation	P _D	1	W
DC Output Current	I _{OUT}	50	mA
Soldering Temperature (under 10 sec)	T _{solder}	260	°C

*Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

TRUTH TABLE

MODE	$\overline{CE1}$	CE2	\overline{OE}	\overline{WE}	I/O OPERATION	SUPPLY CURRENT
Standby	H	X	X	X	High - Z	I _{SB} , I _{SB1}
Standby	X	L	X	X	High - Z	I _{SB} , I _{SB1}
Output Disable	L	H	H	H	High - Z	I _{CC}
Read	L	H	L	H	D _{OUT}	I _{CC}
Write	L	H	X	L	D _{IN}	I _{CC}

Note: H = V_{IH}, L = V_{IL}, X = Don't care.

DC ELECTRICAL CHARACTERISTICS (V_{CC} = 3.1V~3.6V, T_A = 0°C to 70°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	MAX.	UNIT	
Input High Voltage	V _{IH}		2.0	V _{CC} +0.5	V	
Input Low Voltage	V _{IL}		- 0.5	0.6	V	
Input Leakage Current	I _{LI}	V _{SS} ≤ V _{IN} ≤ V _{CC}	- 1	1	μA	
Output Leakage Current	I _{LO}	V _{SS} ≤ V _{I/O} ≤ V _{CC} $\overline{CE1} = V_{IH}$ or CE2 = V _{IL} or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$	- 1	1	μA	
Output High Voltage	V _{OH}	I _{OH} = - 4mA	2.2	-	V	
Output Low Voltage	V _{OL}	I _{OL} = 8mA	-	0.4	V	
Operating Power Supply Current	I _{CC}	Cycle time=Min, I _{I/O} = 0mA,	- 12	-	100	mA
		$\overline{CE1} = V_{IL}$, CE2 = V _{IH}	- 15	-	90	mA
Standby Power Supply Current	I _{SB}	$\overline{CE1} = V_{IH}$ or CE2 = V _{IL}	-	20	mA	
	I _{SB1}	$\overline{CE1} \geq V_{CC}-0.2V$; or CE2 ≤ 0.2V	-	3	mA	

**CAPACITANCE** ($T_A=25^\circ\text{C}$, $f=1.0\text{MHz}$)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Input Capacitance	C_{IN}	-	8	pF
Input/Output Capacitance	$C_{I/O}$	-	10	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

Input Pulse Levels	0V to 3.0V
Input Rise and Fall Times	3ns
Input and Output Timing Reference Levels	1.5V
Output Load	$C_L=30\text{pF}$, $I_{OH}/I_{OL}=-4\text{mA}/8\text{mA}$

AC ELECTRICAL CHARACTERISTICS ($V_{CC} = 3.1\text{V}\sim 3.6\text{V}$, $T_A = 0^\circ\text{C}$ to 70°C)**(1) READ CYCLE**

PARAMETER	SYMBOL	UT61L1024-12		UT61L1024-15		UNIT
		MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	t_{RC}	12	-	15	-	ns
Address Access Time	t_{AA}	-	12	-	15	ns
Chip Enable Access Time	t_{ACE1^*} , t_{ACE1}	-	12	-	15	ns
Output Enable Access Time	t_{OE}	-	6	-	7	ns
Chip Enable to Output in Low Z	t_{CLZ1^*} , t_{CLZ2^*}	3	-	4	-	ns
Output Enable to Output in Low Z	t_{OLZ^*}	0	-	0	-	ns
Chip Disable to Output in High Z	t_{CHZ1^*} , t_{CHZ2^*}	-	6	-	7	ns
Output Disable to Output in High Z	t_{OHZ^*}	-	6	-	7	ns
Output Hold from Address Change	t_{OH}	3	-	3	-	ns

(2) WRITE CYCLE


PARAMETER	SYMBOL	UT61L1024-12		UT61L1024-15		UNIT
		MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	t_{WC}	12	-	15	-	ns
Address Valid to End of Write	t_{AW}	10	-	12	-	ns
Chip Enable to End of Write	t_{CW1^*} , t_{CW2}	10	-	12	-	ns
Address Set-up Time	t_{AS}	0	-	0	-	ns
Write Pulse Width	t_{WP}	9	-	10	-	ns
Write Recovery Time	t_{WR}	0	-	0	-	ns
Data to Write Time Overlap	t_{DW}	7	-	8	-	ns
Data Hold from End of Write Time	t_{DH}	0	-	0	-	ns
Output Active from End of Write	t_{OW^*}	3	-	4	-	ns
Write to Output in High Z	t_{WHZ^*}	-	7	-	8	ns

*These parameters are guaranteed by device characterization, but not production tested.




TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2,4)

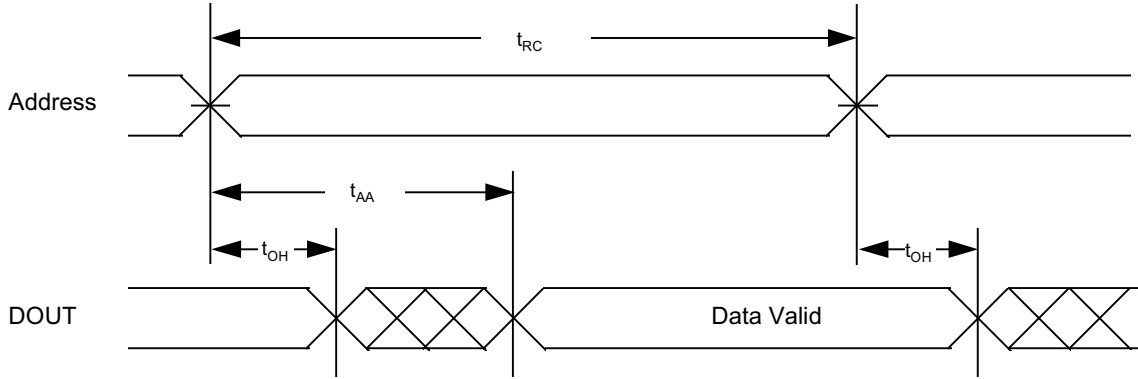

READ CYCLE 2 ($\overline{CE1}$, CE2 and \overline{OE} Controlled) (1,3,5,6)

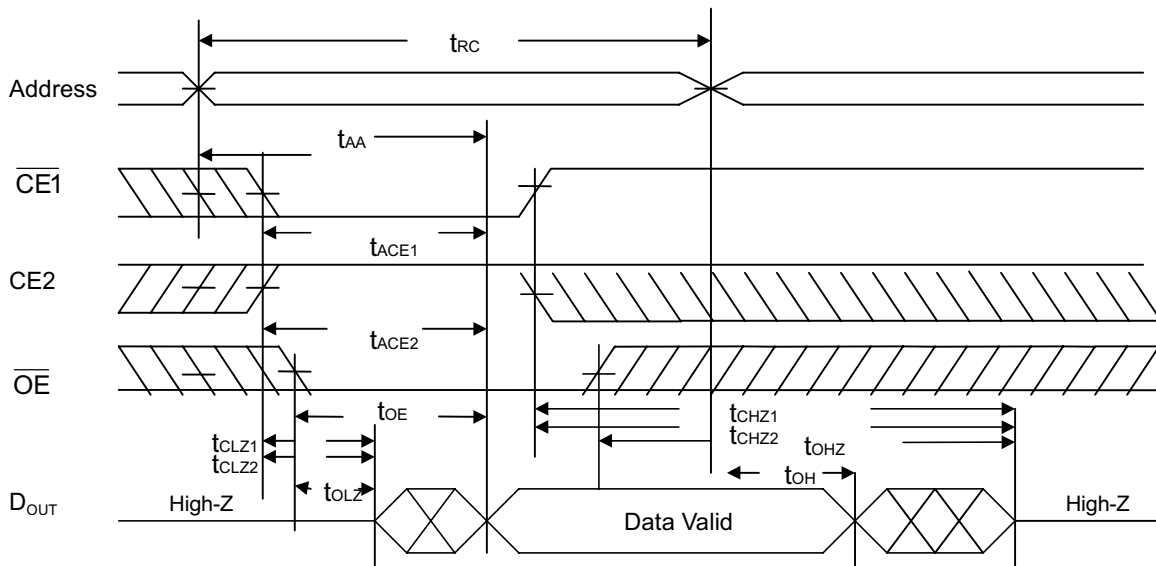


Notes :


1. \overline{WE} is HIGH for read cycle.
2. Device is continuously selected $\overline{CE1}=V_{IL}$ and $CE2=V_{IH}$.
3. Address must be valid prior to or coincident with $\overline{CE1}$ and CE2 transition; otherwise t_{AA} is the limiting parameter.
4. \overline{OE} is low.
5. t_{CLZ1} , t_{CLZ2} , t_{OLZ} , t_{CHZ1} , t_{CHZ2} and t_{OHZ} are specified with $C_L=5pF$. Transition is measured $\pm 500mV$ from steady state.
6. At any given temperature and voltage condition, t_{CHZ1} is less than t_{CLZ1} , t_{CHZ2} is less than t_{CLZ2} , t_{OHZ} is less than t_{OLZ} .



WRITE CYCLE 1 (\overline{WE} Controlled) (1,2,3,5)

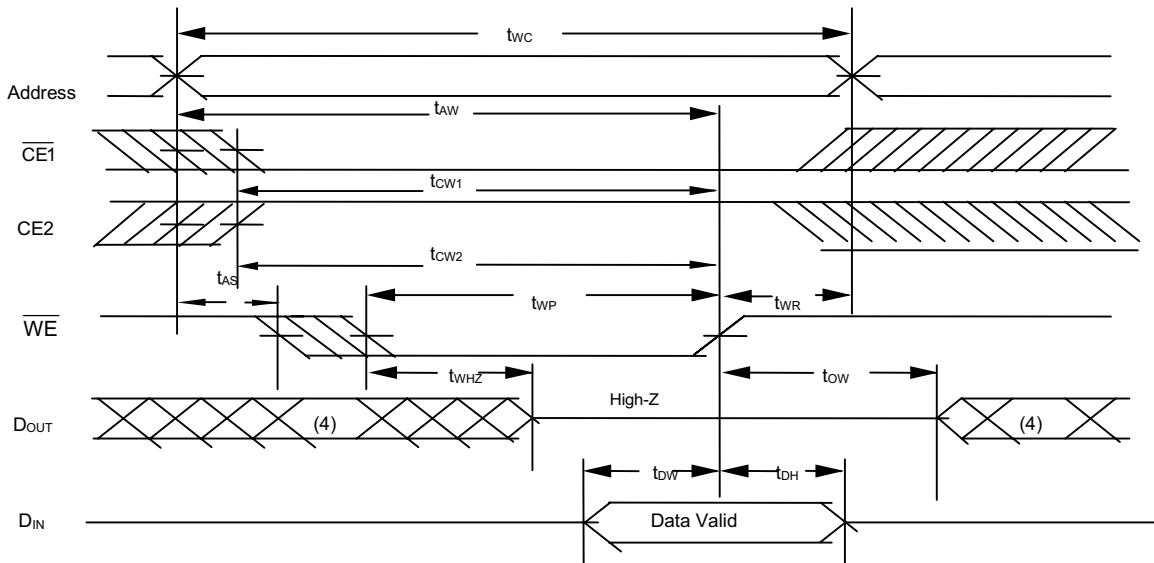

WRITE CYCLE 2 ($\overline{CE1}$ and $\overline{CE2}$ Controlled) (1,2,5)

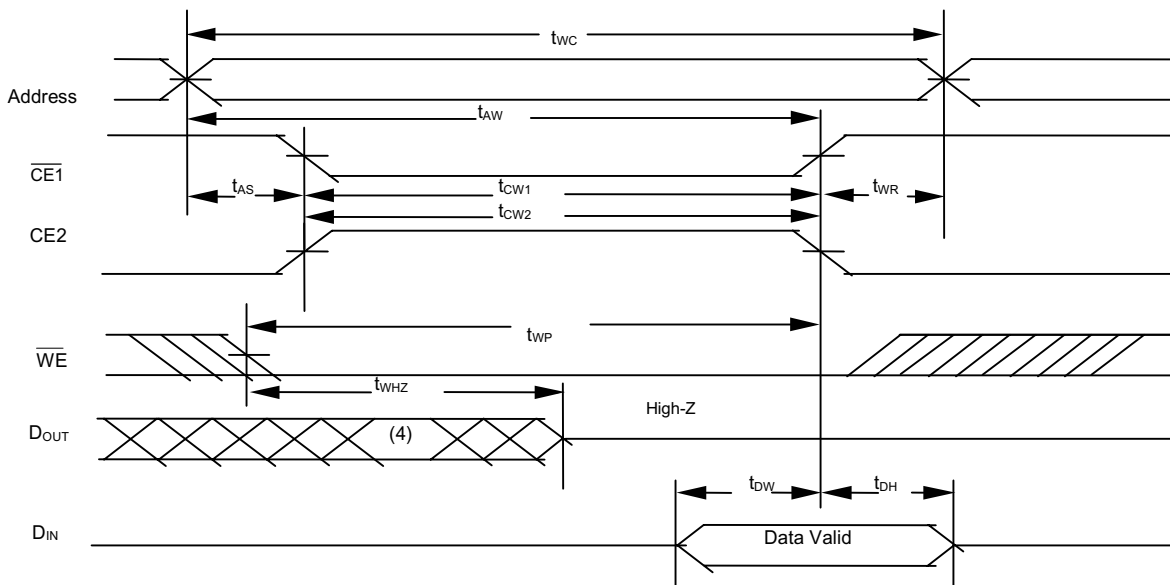


Notes :

1. \overline{WE} or $\overline{CE1}$ must be HIGH during all address transitions.
2. A write occurs during the overlap of a low $\overline{CE1}$ and a low \overline{WE} .
3. During a \overline{WE} controlled with write cycle with \overline{OE} LOW, t_{WP} must be greater than $t_{WHZ} + t_{DW}$ to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the $\overline{CE1}$ LOW transition occurs simultaneously with or after \overline{WE} LOW transition, the outputs remain in a high impedance state.
6. t_{OW} and t_{WHZ} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.



PACKAGE OUTLINE DIMENSION

32 pin PDIP 300mil Package Outline Dimension

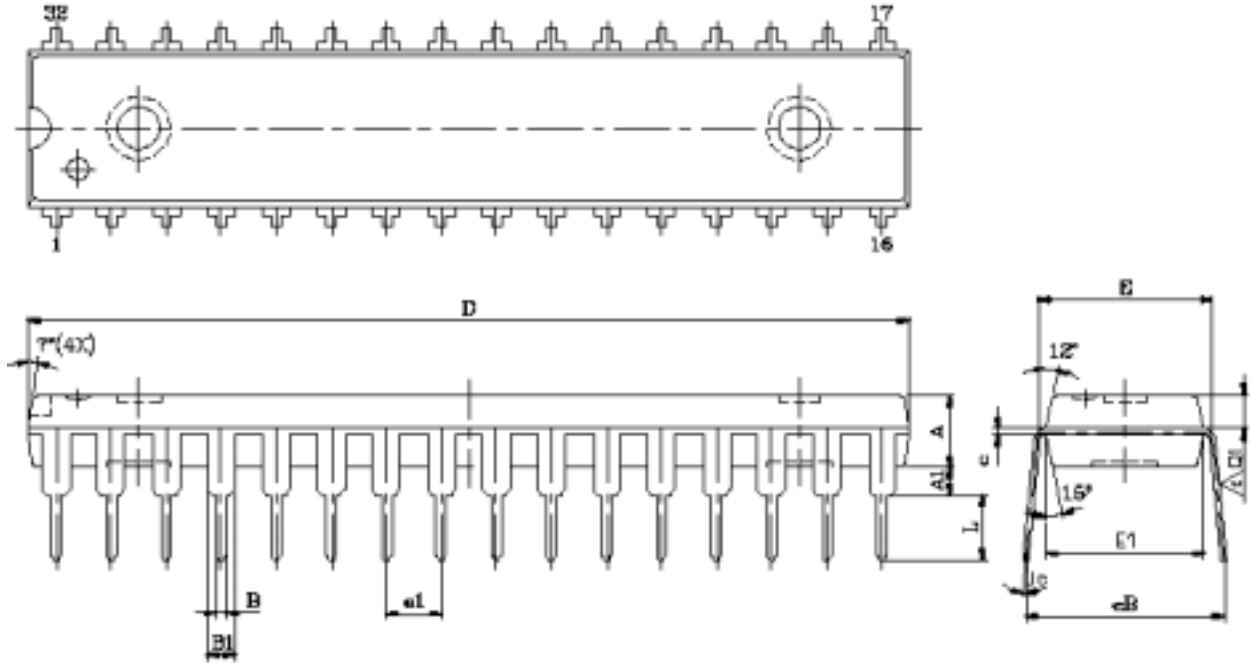


SYMBOL \ UNIT	INCH(BASE)	MM(REF)
A	0.130 ± 0.005	3.302 ± 0.127
A1	0.015(MIN)	0.381 (MIN)
B	0.018 ± 0.004	0.457 ± 0.102
B1	0.050 ± 0.008	1.270 ± 0.203
c	0.010 ± 0.004	0.254 ± 0.102
D	1.600 ± 0.005	40.640 ± 0.127
E	0.315 ± 0.010	8.001 ± 0.254
E1	0.288 ± 0.004	7.315 ± 0.102
e1	0.100 TYP	2.540 TYP
eB	0.350 ± 0.020	8.890 ± 0.508
L	0.125 (MIN)	3.175 (MIN)
Q1	0.060 ± 0.005	1.524 ± 0.127
Jc	0°~10°	0°~10°






32 pin SOJ Package Outline Dimension

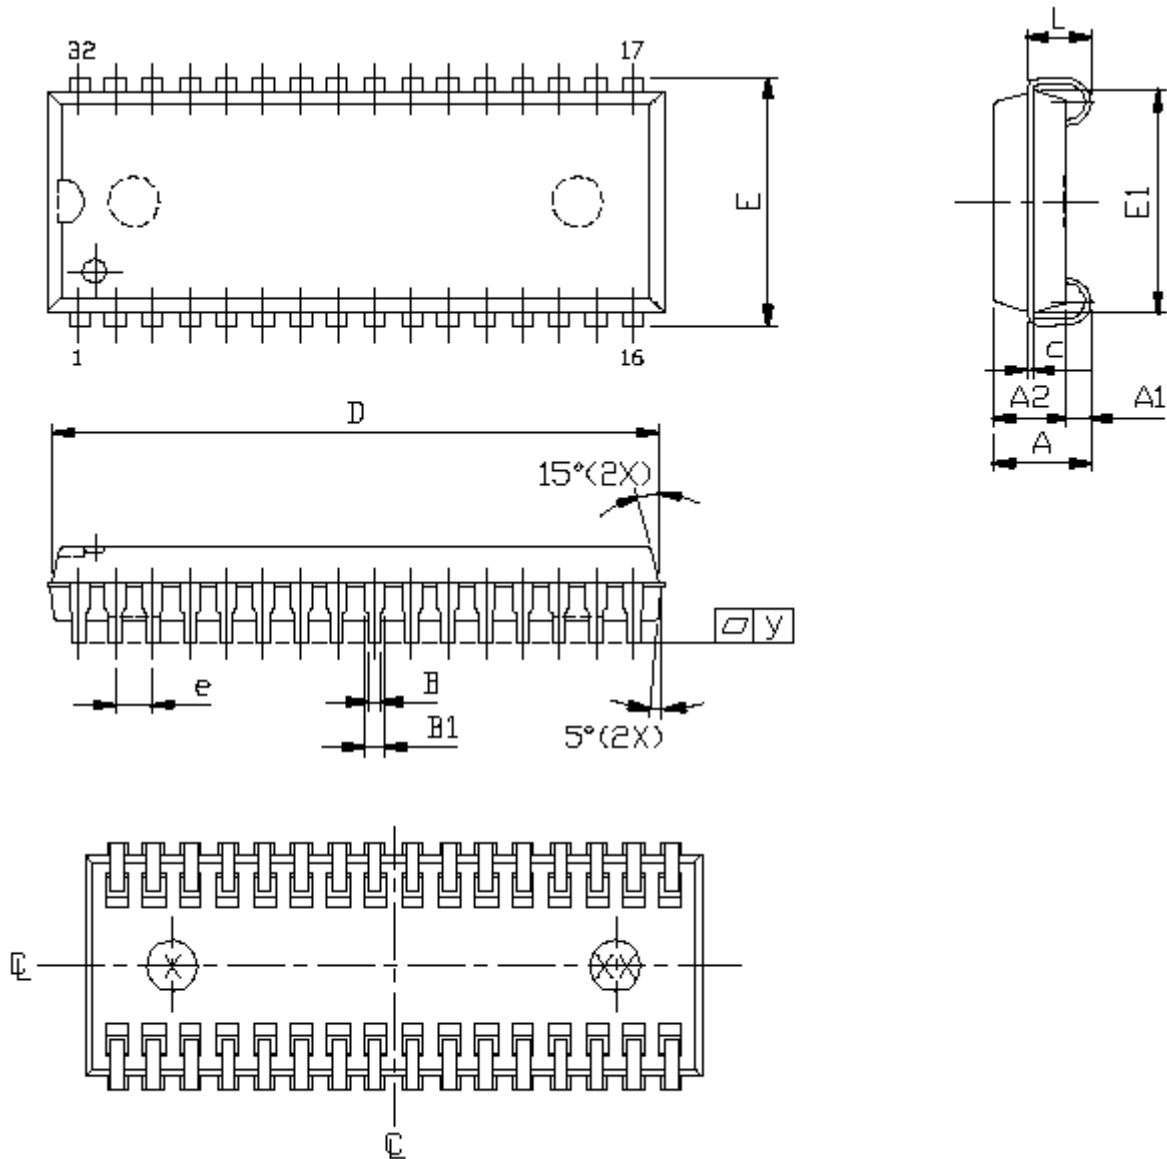


SYMBOL	UNIT	INCH(BASE)	MM(REF)
A		0.148 (MAX)	3.759 (MAX)
A1		0.026 (MIN)	0.660 (MIN)
A2		0.100 ± 0.005	2.540 ± 0.127
B		0.018 (TYP)	0.457(TYP)
B1		0.028 (TYP)	0.711 (TYP)
C		0.010 (TYP)	0.254 (TYP)
D		0.830 (MAX)	21.082 (MAX)
E		0.335 (TYP)	8.509 (TYP)
E1		0.300 ± 0.005	7.620 ± 0.127
e		0.050 (TYP)	1.270 (TYP)
L		0.086 ± 0.010	2.184 ± 0.254
y		0.003 (MAX)	0.076 (MAX)



32 pin 8mm x 20mm TSOP-I Package Outline Dimension

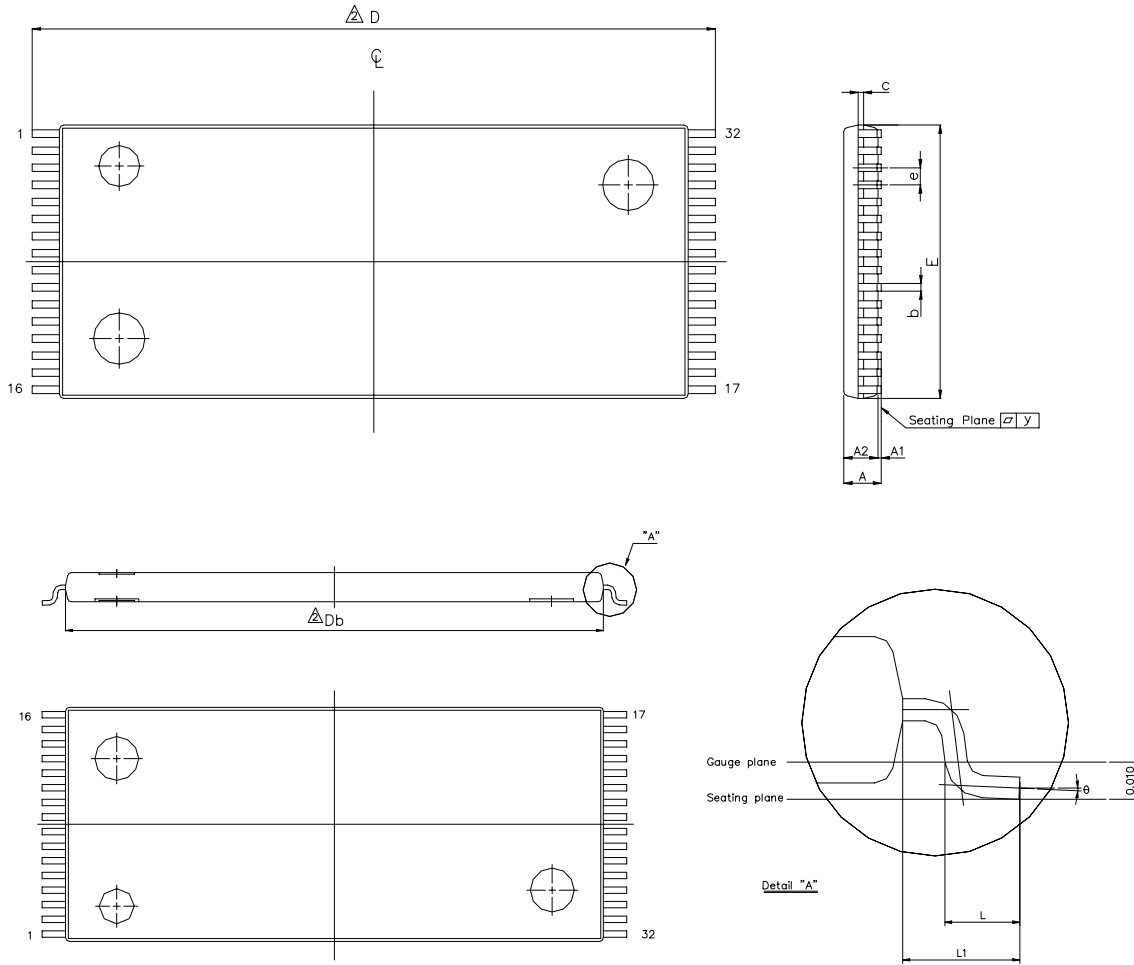


SYMBOL \ UNIT	INCH(BASE)	MM(REF)
A	0.047 (MAX)	1.20 (MAX)
A1	0.004 ± 0.002	0.10 ± 0.05
A2	0.039 ± 0.002	1.00 ± 0.05
b	0.008 + 0.002	0.20 + 0.05
c	0.005 (TYP)	0.127 (TYP)
D	0.724 ± 0.004	18.40 ± 0.10
E	0.315 ± 0.004	8.00 ± 0.10
e	0.020 (TYP)	0.50 (TYP)
HD	0.787 ± 0.008	20.00 ± 0.20
L	0.0197 ± 0.004	0.50 ± 0.10
L1	0.0315 ± 0.004	0.08 ± 0.10
y	0.003 (MAX)	0.076 (MAX)
θ	0°~5°	0°~5°





32 pin 8mm x 13.4mm STSOP Package Outline Dimension

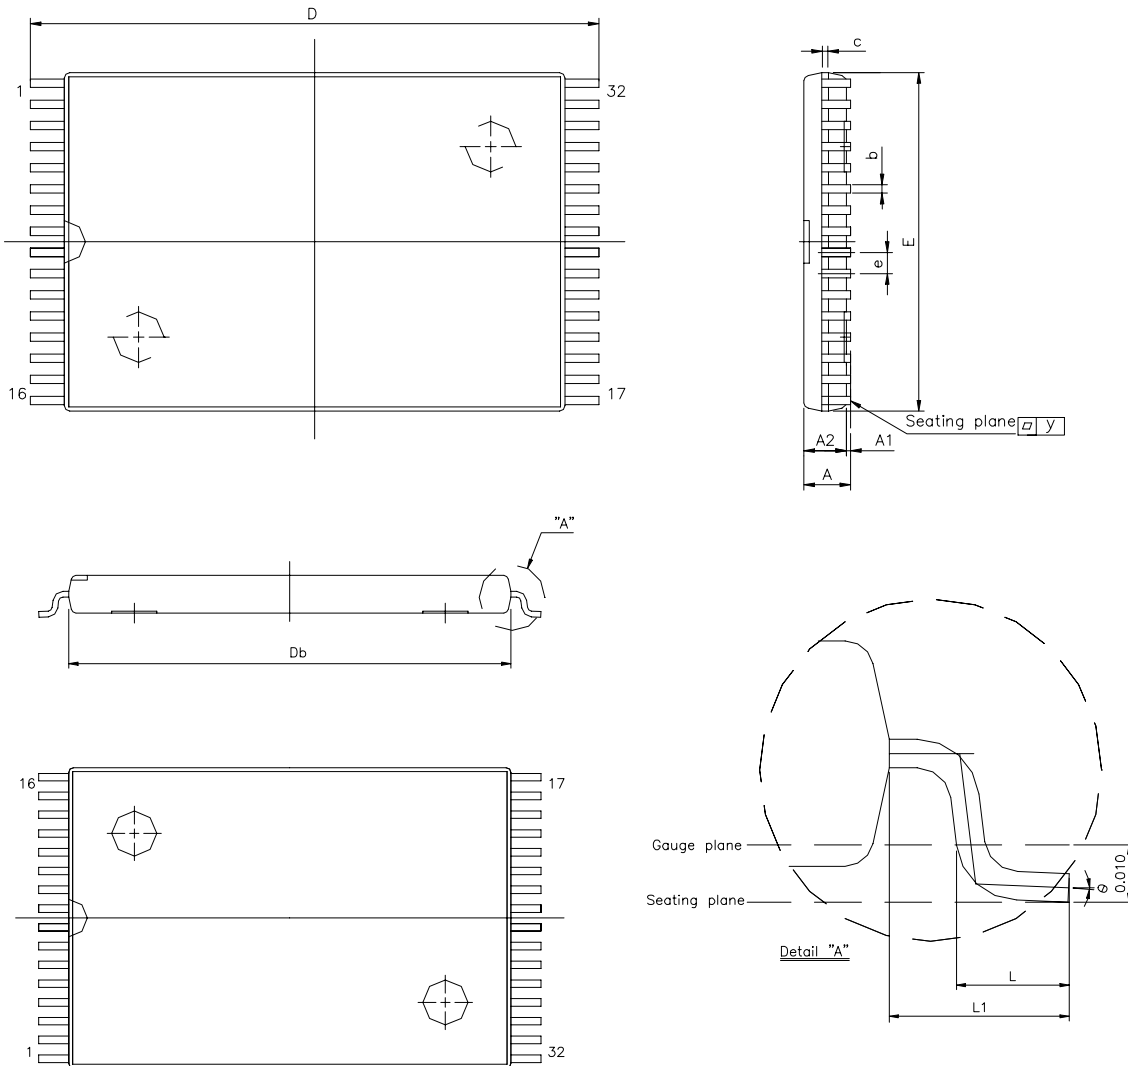


Note :

1. E dimension is not including end flash.
2. The total of both sides' end flash is not above 0.3mm.

SYMBOL	UNIT	MM(REF)	INCH(BASE)
A		1.20(Max.)	0.047(Max.)
A1		0.1060.05	0.00460.002
A2		1.0060.05	0.03960.002
b		020(typ.)	0.006(typ.)
c		0.15(typ.)	0.006(typ.)
D		13.4060.20	0.52660.006
Db		11.8060.10	0.46560.004
E		8.00060.10	0.31560.004
e		0.50(typ.)	0.020(typ.)
L		0.5060.10	0.02060.004
L1		0.8060.10	0.031560.004
y		0.08(Max.)	0.003(Max.)
e		08~58	08~58



32 pin 445mil SOP Package Outline Dimension

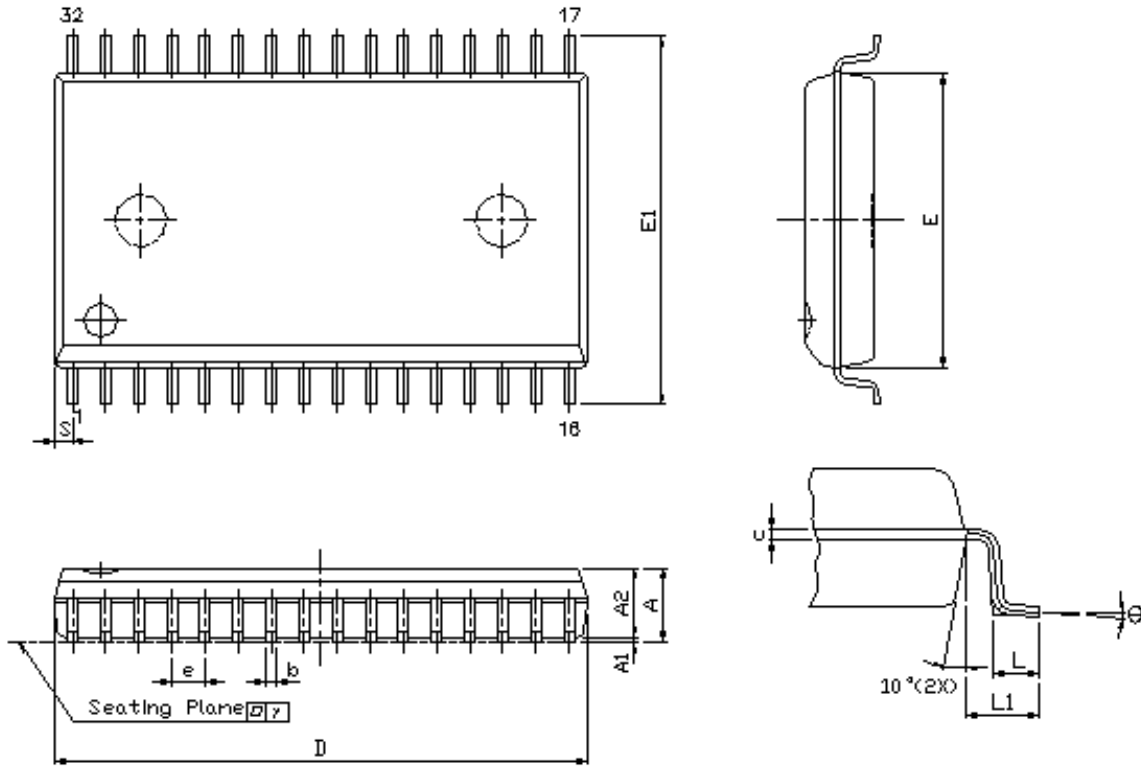

SYMBOL	UNIT	INCH(BASE)	MM(REF)
A		0.118(MAX.)	0.047(MAX.)
A1		0.004(MIN)	0.00460.002
A2		0.111(MAX)	0.03960.002
b		0.016(TYP.)	0.006(TYP.)
c		0.008(TYP.)	0.006(TYP.)
D		0.817(MAX)	0.52660.006
E		0.44560.005	0.31560.004
e		0.050(TYP.)	0.020(TYP.)
L		0.034760.008	0.02060.004
L1		0.05560.008	0.031560.004
S		0.026(MAX)	0.914(MAX)
y		0.004(MAX.)	0.101(MAX.)
θ		08~108	08~108



UTRON

Rev 1.4

UT61L1024

128K X 8 BIT HIGH SPEED CMOS SRAM

ORDERING INFORMATION

PART NO.	ACCESS TIME (ns)	PACKAGE
UT61L1024KC-12	12	32PIN SKINNY PDIP
UT61L1024KC-15	15	32PIN SKINNY PDIP
UT61L1024JC-12	12	32PIN SOJ
UT61L1024JC-15	15	32PIN SOJ
UT61L1024SC-12	12	32PIN SOP
UT61L1024LC-12	12	32PIN TSOP-1
UT61L1024LC-15	15	32PIN TSOP-1
UT61L1024LS-12	12	32PIN STSOP
UT61L1024LS-15	15	32PIN STSOP



REVISION HISTORY

REVISION	DESCRIPTION	DATE
Rev. 1.0	Original.	Apr. 05 2000
Rev. 1.1	Add TSOP-I Package	Aug. 29.2000
Rev. 1.2	Modify the format of power consumption	Sep. 01.2000
Rev. 1.3	1. V_{OH} : 2.4 -> 2.2 2. Input Rise & Fall times : 5->3ns 3. The symbols CE1# ,OE# & WE# are revised as $\overline{CE1}$, \overline{OE} & \overline{WE}	Jun. 18,2001
Rev.1.4	Add SOP Package.	Jul. 6,2001