



MJ15016


PNP PLANAR SILICON TRANSISTOR

**AUDIO POWER AMPLIFIER
DC TO DC CONVERTER**

- High Current Capability
- High Power Dissipation
- Complementary to MJ15015

ABSOLUTE MAXIMUM RATING (Ta=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	VCBO	-120	V
Collector-Emitter Voltage	VCEO	-120	V
Emitter-Base voltage	VEBO	-5	V
Collector Current (DC)	IC	-15	A
Collector Dissipation	PC	180	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-50~150	°C

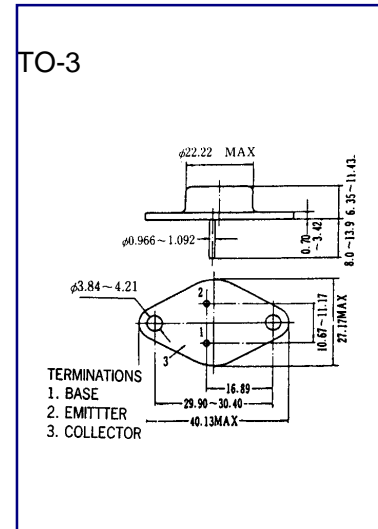

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Base Breakdown Voltage	BVCBO	IC=-10 mA IE=0	-120			V
Collector Emitter Breakdown Voltage	BVCEO	IC=-5 mA RBE=∞	-120			V
Emitter Base Breakdown Voltage	BVEBO	IE=-5 mA IC=0	-5			V
Collector Cutoff Current	ICBO	VCB=-60V IE=0			-0.1	mA
Emitter Cutoff Current	IEBO	VEB=-4V IC=0			-0.1	mA
*DC Current Gain	hFE1	VCE=-5V IC=-1A	30		150	
DC Current Gain	hFE2	VCE=-5V IC=-4A	20			
Collector- Emitter Saturation Voltage	VCE(sat)	IC=-4A IB=-0.4A			-1.0	V

Wing Shing Computer Components Co., (H.K.)Ltd.
Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153
E-mail: wsccltd@hkstar.com