



SMJ 1000-7A

Quad-Diode Mixer


The Communications Edge™

Preliminary Product Information

Product Features

- Input IP3 +13 dBm
- RF Freq 5 - 1000 MHz
- LO Freq 5 - 1000 MHz
- IF Freq DC - 1000 MHz
- LO Drive Level +7 dBm

Functional Diagram



Function	Pin No.
Ground	1
IF	2
RF	3
Ground	4-5
LO	6

Specifications

Parameters	Units	Minimum	Typical	Maximum	Comments
RF Frequency	MHz	5		1000	
LO Frequency	MHz	5		1000	
IF Frequency	MHz	DC		1000	
SSB Conversion Loss	dB		7.0		
L-R Isolation	dB		35		
L-I Isolation	dB		30		
IIP3	dBm		+13		
LO Drive	dBm		+7		
RF - Return Loss	dB		12		
LO - Return Loss	dB		14		
IF - Return Loss	dB		11		

Test conditions unless otherwise noted
 1. Tested in a 50 Ohm System, low Side LO.

Recommended Maximum Rating

Parameters	Rating
Operating Case Temperature	-40 to +70 °C
Storage Temperature	-65 to +100 °C
RF Input Power at 25°C (continuous)	+13 dBm

Ordering Information

Part No.	Description
SMJ 1000-7A	Diode Mixer (Available in Tape & Reel)
SMJ 1000-7A-PCB	Fully Assembled Application Circuit

This document contains information on a new product.
 Specifications and information are subject to change without notice





SMJ 1000-7A

Quad-Diode Mixer



The Communications Edge™

Preliminary Product Information


OUTLINE DRAWING

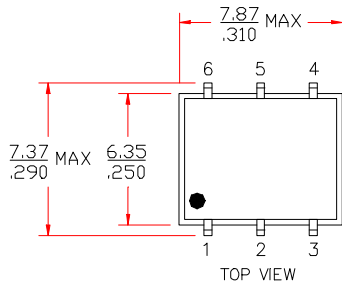


mm
inch



LAND PATTERN

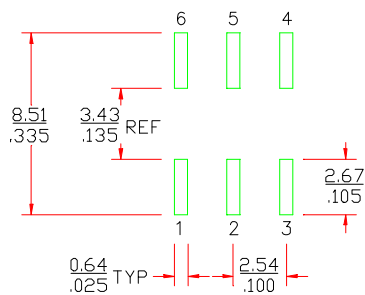

MOUNTING CONFIGURATION

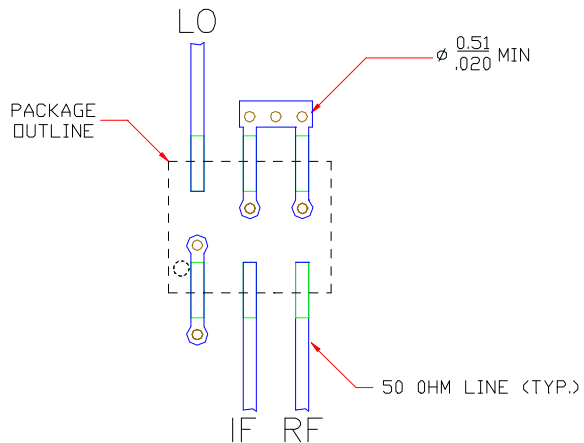

FUNCTION	PIN NO.
GROUND	1
IF	2
RF	3
GROUND	4-5
LO	6

- Notes:
1. Ground vias are critical for RF grounding considerations.
 2. If your PCB design rules allow, ground vias should be placed under the land pattern for better RF performance. Otherwise ground vias should be placed as close land pattern as possible.
 3. Trace width depends on PC board.

This document contains information on a new product. Specifications and information are subject to change without notice.