

# 15Watts Single Output External Adapter

## ADE-150X series

### Feature:

- 90 to 264Vac universal input range.
- UL/CUL,TUV safety meet(approval).
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 15Watts in 105.8×57.5×33.2mm Size.
- 2 Year Warranty.

### Specifications: typical at nominal line, full load at 25°C.

Input Specifications:	General Specifications:
<b>Input voltage:</b> 90 to 264Vac	<b>Efficiency:</b> 70% typical at full load
<b>Input Frequency:</b> 47 Hz to 63Hz	<b>Hold-up time:</b> 10ms @ 115Vac full load
<b>Input inrush current:</b> 20A at 115Vac 40A at 230Vac	<b>EMI/RFI:</b> VDE & FCC Class B limits
<b>Earth leakage:</b> 0.2mA max @ 115Vac 0.4mA max @ 230Vac	<b>Dielectric Withstand:</b> Input/output: 3000Vac Input/Ground: 1500Vac
<b>Output Specifications:</b>	<b>Safety Meet(approval):</b> UL/CUL UL60950 TUV EN60950
<b>Output Rating:</b> See selection table	
<b>Output Voltage Accuracy :</b> ± 5% max.	
<b>Line Regulation:</b> ± 1% max.	<b>Switching frequency:</b> 35kHz
<b>Load Regulation:</b> ± 5% max. (Full to half load)	<b>Weight:</b> 200g
<b>Transient Response:</b> ± 1% max.dev. (Full to half load) 500uS recovery	<b>MTBF:</b> 100,000hours(MIL-HDBK-217F)
	<b>Environmental Specifications:</b>
<b>Temperature Coefficient:</b> ± 0.04% / °C	<b>Operating temperature:</b> 0 to +40°C
<b>Ripple &amp; Noise:</b> 2% P-P max	<b>Storage temperature:</b> -20 to +85°C
<b>Protections:</b>	<b>Humidity:</b> 5 to 95 % RH non-condensing
a. Over voltage protection	<b>Vibration:</b> 2.4G , 5 to 500Hz
b. Over power protection	<b>Cooling:</b> Free air convection
c. Short circuit protection	

Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
  2. Maximum output power is 15W.
  3. At least 20% of load is required to obtain stable regulation.
  4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.
- ★ Please refer the safety approval status on appendix 1, For latest safety approval status Please consult YCL or visit" [www.ycl.com.tw](http://www.ycl.com.tw)

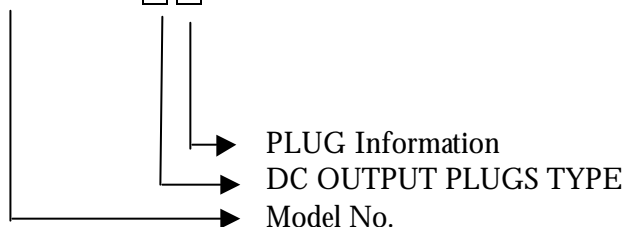
# 15Watts Single Output External Adapter **ADE-150X series**

## Model Selection Table:

Model No.	Output Voltage	Output Current Minimum	Output Current Maximum	Max. Power
ADE-1501	5V	0mA	3000mA	15W
ADE-1502	12V	0mA	1250mA	15W
ADE-1503	15V	0mA	1000mA	15W
ADE-1504	24V	0mA	625mA	15W
ADE-1505	3.3V	0mA	5000mA	15W









**Note:**

□ Order information: ADE-XXXXX<sup>X</sup><sup>Y</sup>



□ Others output voltage or DC cord versions are available. Please consult factory for details.

## DC OUTPUT PLUGS

PF : Plug S-Female  PF A	PLF: Plug L-Female  PLF B	PM : Plug S-Male  PM C	PLM: Plug S-Male  PLM D
PGS: Plug EIAJ RC-5320  PGS E	PGL: Plug L-EIAJ RC-5320  PGL F	PFI: Plug S-Female I shape  PFI G	PLFI: Plug L-Female I shape  PLFI H

# 15Watts Single Output External Adapter ADE-150X series



**Dimensions:** mm  $\pm$  1.0mm

