

AZ766

SPST SUBMINIATURE POWER RELAY

FEATURES

- Small footprint
- Low seated height
- Low cost
- Epoxy sealed version available
- 12 Amp switching
- UL Class B insulation system
- UL, CUR file E44211



CONTACTS

Arrangement	SPST (1 Form A)
Ratings	Resistive load: Max. switched power: 300 W or 2770 VA Max. switched current: 12 A Max. switched voltage: 150* VDC or 400 VAC *Note: If switching voltage is greater than 30VDC, special precautions must be taken. Please contact the factory.
Rated Load UL, CUR	12 A at 125 VAC 10 A at 277 VAC / 30 VDC TV-5 1/4 HP, 125 VAC / 250 VAC
Minimum Load	5 VDC, 0.1 A
Material	Silver tin oxide
Resistance	< 50 milliohms initially (24 V, 1 A voltage drop method)

COIL

Power	
At Pickup Voltage (typical)	253 mW
Max. Continuous Dissipation	1.8 W at 20°C (68°F) ambient 1.6 W at 40°C (104°F) ambient
Temperature Rise	39°C (70°F) at nominal coil voltage
Temperature	Max. 130°C (266°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ (at 10 A 125 VAC) 3 x 10 ⁴ (at 12 A 125 VAC)
Operate Time (typical)	8 ms at nominal coil voltage
Release Time (typical)	5 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	2500 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 20°C 500 VDC 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 90°C (194°F) -40°C (-40°F) to 130°C (266°F)
Vibration	0.040" DA at 10–50 Hz
Shock	10 g operating, 100 g damage
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	6 grams

ZETTLER electronics


Logistic Design (UK) Limited. Unit 3, Eagle Centre Way, Luton LU4 9US www.zettlerrelay.com sales@zettlerrelay.com
Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700

AZ766

RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Unsealed	Sealed
3	2.25	6.0	20	AZ766-1A-3D	AZ766-1A-3DE
5	3.75	9.9	55	AZ766-1A-5D	AZ766-1A-5DE
6	4.5	12.0	80	AZ766-1A-6D	AZ766-1A-6DE
9	6.75	18.0	180	AZ766-1A-9D	AZ766-1A-9DE
12	9.0	24.0	320	AZ766-1A-12D	AZ766-1A-12DE
18	13.5	36.0	720	AZ766-1A-18D	AZ766-1A-18DE
24	18.0	48.0	1,280	AZ766-1A-24D	AZ766-1A-24DE

MECHANICAL DATA

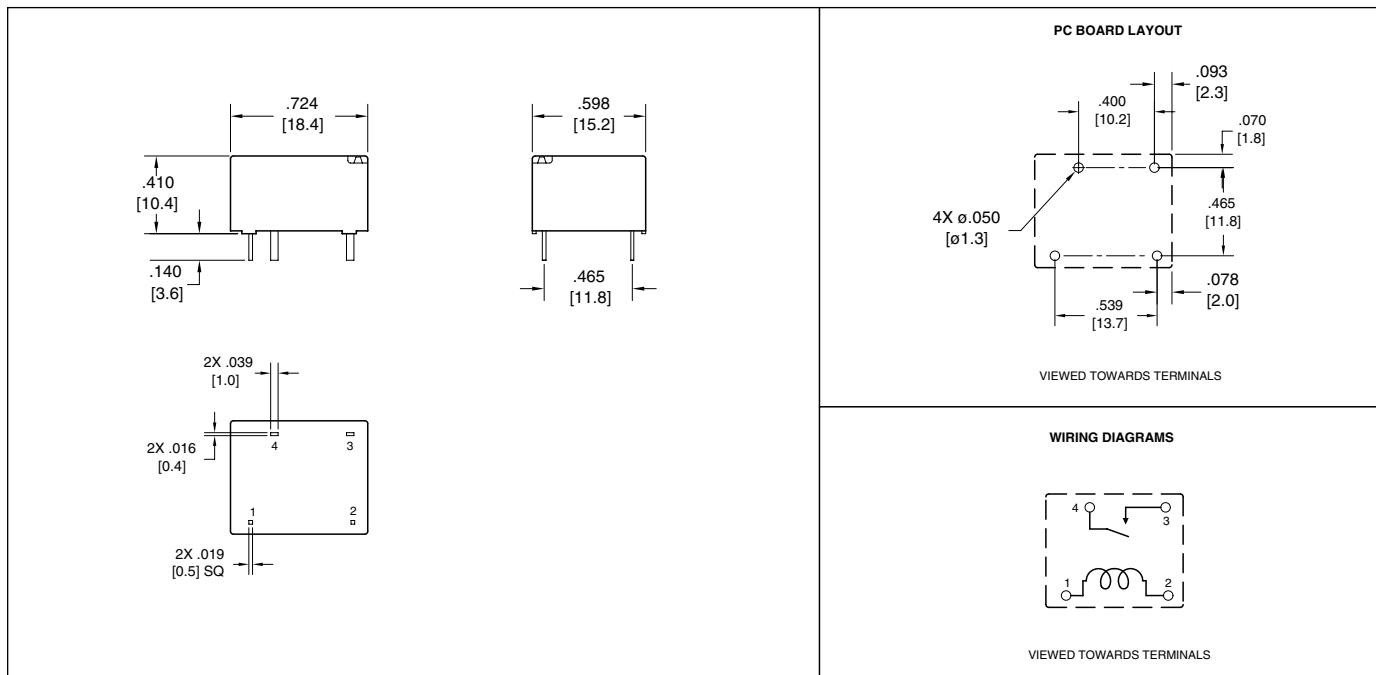

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

ZETTLER electronics

Logistic Design (UK) Limited, Unit 3, Eagle Centre Way, Luton LU4 9US www.zettlerrelay.com sales@zettlerrelay.com
 Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700

1998-06-18