

CMSD6263  
 CMSD6263A  
 CMSD6263C  
 CMSD6263S

**SUPERmini™ SURFACE MOUNT  
 SCHOTTKY DIODES**

**SUPERmini™**



**SOT-323 CASE**

# Central™

**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMSD6263 Series types are High Voltage Silicon Schottky diodes, epoxy molded in a SUPERmini™ surface mount package, designed for low current fast switching applications requiring a low forward voltage drop. The following configurations are available:

**MARKING  
 CODE**

<b>CMSD6263</b>	SINGLE	<b>76D</b>
<b>CMSD6263A</b>	DUAL, COMMON ANODE	<b>98D</b>
<b>CMSD6263C</b>	DUAL, COMMON CATHODE	<b>97D</b>
<b>CMSD6263S</b>	DUAL, IN SERIES	<b>96D</b>


**MAXIMUM RATINGS:** (T<sub>A</sub>=25°C)

	<b>SYMBOL</b>		<b>UNITS</b>
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	70	V
Continuous Forward Current	I <sub>F</sub>	15	mA
Forward Surge Current, tp=1.0 s	I <sub>FSM</sub>	50	mA
Power Dissipation	P <sub>D</sub>	350	mW
Operating and Storage			
Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C
Thermal Resistance	Θ <sub>JA</sub>	357	°C/W

**ELECTRICAL CHARACTERISTICS:** (T<sub>A</sub>=25°C)

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>UNITS</b>
BV <sub>R</sub>	I <sub>R</sub> =10μA	70			V
V <sub>F</sub>	I <sub>F</sub> =1.0mA		395	410	mV
I <sub>R</sub>	V <sub>R</sub> =50V		98	200	nA
C <sub>T</sub>	V <sub>R</sub> =0V, f=1.0MHz			2.0	pF
t <sub>rr</sub>	I <sub>R</sub> =I <sub>F</sub> =10mA, I <sub>rr</sub> =1mA, R <sub>L</sub> =100Ω			5.0	ns


**SOT-323 CASE - MECHANICAL OUTLINE**

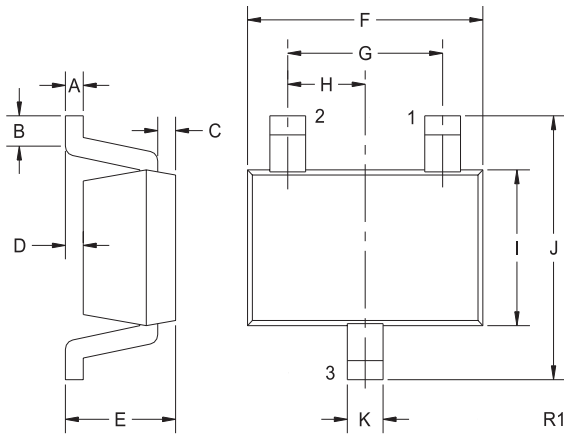


SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.008	0.10	0.20
B	0.004	-	0.10	-
C	0.004	0.008	0.10	0.20
D	-	0.004	-	0.10
E	0.031	0.043	0.80	1.10
F	0.071	0.087	1.80	2.20
G	0.051		1.30	
H	0.026		0.65	
I	0.045	0.053	1.15	1.35
J	0.079	0.087	2.00	2.20
K	0.008	0.016	0.20	0.40

SOT-323 (REV: R1)


**CONFIGURATIONS**




**CMSD6263**



**CMSD6263A**



**CMSD6263C**



**CMSD6263S**