


UHF SHF TUNING.

#### FEATURES

- High Capacitance Ratio :  $C_{2V}/C_{25V}=7.6(\text{Typ.})$
- Low Series Resistance :  $r_s=1.9\Omega(\text{Typ.})$
- Excellent C-V Characteristics, and Small Tracking Error.
- Useful for Small Size Tuner.

#### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	30	V
Peak Reverse Voltage	$V_{RM}$	$35(R_L=10k\Omega)$	V
Junction Temperature	$T_j$	125	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 125	°C

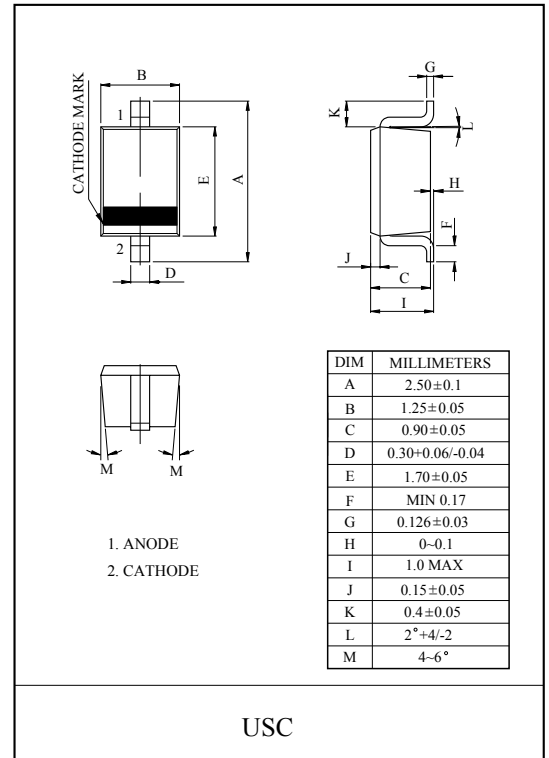

#### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	$V_R$	$I_R=1\mu A$	30	-	-	V
Reverse Current	$I_R$	$V_R=28V$	-	-	10	nA
Capacitance	$C_{2V}$	$V_R=2V, f=1MHz$	4.2	-	5.7	pF
Capacitance	$C_{25V}$	$V_R=25V, f=1MHz$	0.53	-	0.68	pF
Capacitance Ratio	$C_{2V}/C_{25V}$		7.3	-	-	-
Series Resistance	$r_s$	$V_R=5V, f=470MHz$	-	1.9	2.3	$\Omega$

Note : Available in matched group for capacitance to 6%.

$$\frac{C(\text{Max.})-C(\text{Min.})}{C(\text{Min.})} \leq 0.06$$

$$(V_R=2\sim 25V)$$

