April 2000

0°C to 125°C

-40°C to 125°C

0.005% (typical)

0.05% (typical)

National Semiconductor

LMS1585A/LMS1587 5A and 3A Low Dropout Fast Response Regulators

General Description

The LMS1585A and LMS1587 are low dropout positive regulators with output load current of 5A and 3A respectively. Their low dropout voltage (1.2V) and fast transient response make them an excellent solution for low voltage microprocessor applications.

The LMS1585A/87 are available in adjustable versions, which can set the output voltage with only two external resistors. In addition, they are also available in a 3.3V fixed voltage version (Note 9).

The LMS1585A/87 circuits include a zener trimmed bandgap reference, current limiting and thermal shutdown.

The LMS1585A/87 series are available in TO-220 and TO-263 packages.


Features

- Fast transient response
- Available in Adjustable, 1.5V, and 3.3V versions
- Current limiting and thermal protection
- Commercial temp. range
- Industrial temp. range
- Line regulation
- Load regulation
- Direct replacement for LT[™]1585A/87

Applications

- Pentium[™] processor supplies
- Pentium[™] processor
 PowerPC[™] supplies
- Other 2.5V to 3.6V microprocessor supplies
- Low voltage logic supplies


Typical Application




* REQUIRED FOR STABILITY

DS101197-1


Connection Diagrams





LT is a registered trademark of Linear Technology Corporation Pentium is a registered trademark of Intel Corporation PowerPC is a registred trademark of IBM LMS1585A/LMS1587

Output Current	Package	Temperature Range	Part Number	Transport Media	NSC Drawing		
3A	TO-263	0°C to 125°C	LMS1587CS-ADJ	Rails			
		-	LMS1587CSX-ADJ	Tape and Reel	7		
			LMS1587CS-1.5	Rails			
			LMS1587CSX-1.5	Tape and Reel	 тѕзв		
			LMS1587CS-3.3	Rails			
			LMS1587CSX-3.3	Tape and Reel	7 1336		
		–40°C to 125°C	LMS1587IS-ADJ	Rails			
			LMS1587ISX-ADJ	Tape and Reel			
			LMS1587IS-3.3	Rails			
			LMS1587ISX-3.3	Tape and Reel	1		
	TO-220	0°C to 125°C	LMS1587CT-ADJ	Rails			
			LMS1587CT-3.3	Rails	Тозв		
		-40°C to 125°C	LMS1587IT-ADJ	Rails	- 103B		
			LMS1587IT-3.3	Rails	7		
5A	TO-263	0°C to 125°C	LMS1585ACS-ADJ	Rails			
		Ī	LMS1585ACSX-ADJ	Tape and Reel			
			LMS1585ACS-3.3	Rails			
			LMS1585ACSX-3.3	Tape and Reel	TS3E		
_		–40°C to 125°C	LMS1585AIS-ADJ	Rails			
			LMS1585AISX-ADJ	Tape and Reel			
			LMS1585AIS-3.3	Rails			
			LMS1585AISX-3.3	Tape and Reel	1		
	TO-220	0°C to 125°C	LMS1585ACT-ADJ	Rails			
			LMS1585ACT-3.3	Rails	Тозв		
		-40°C to 125°C	LMS1585AIT-ADJ	Rails	IU3B		
			LMS1585AIT-3.3	Rails			

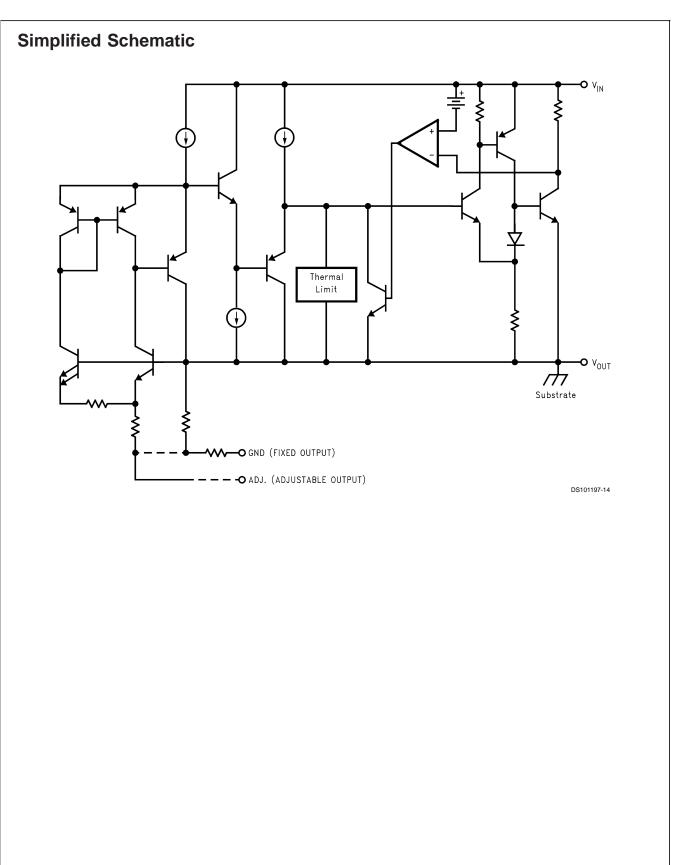

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Maximum Input to Output Voltage (V_{IN} to GND)

13V

Electrical Characteristics

Power Dissipation (Note 2)InternalJunction Temperature (T_J)(Note 2)Storage Temperature Range-65°Lead Temperature260ESD Tolerance (Note 3)-65°

Internally Limited 150°C -65°C to 150°C 260°C, 10 sec 2000V

Typicals and limits appearing in normal type apply for $T_J = 25^{\circ}C$. Limits appearing in **Boldface** type apply over the entire junction temperature range for operation, $0^{\circ}C$ to $125^{\circ}C$ for commercial grade and $-40^{\circ}C$ to $125^{\circ}C$ for industrial grade.

1	Conditions	(Note 5)	(Note 4)	(Note 5)	Units
Reference Voltage	LMS1585A-ADJ		"/		
	$V_{IN}-V_{OUT} = 3V$, $I_{OUT} = 10$ mA	1.238	1.25	1.262	V V
					V
					<u> </u>
		1.225	1.250	1.275	V
Output Voltage					<u> </u>
e alp at termige		3.267	3.300	3.333	V V
		3.235	3.300	3.365	V I
	LMS1587-1.5				<u> </u>
	$V_{IN} = 5V, I_{OUT} = 0mA, T_{I} = 25^{\circ}C$	1.485	1.500	1.515	V I
		1.470	1.500	1.530	v
	LMS1587-3.3				
	$0 \le I_{OUT} \le 3A, 4.75V \le V_{IN} \le 7V$	3.235	3.300	3.365	V V
Line Regulation	LMS1585A/87-ADJ				
(Note 6)	$I_{OUT} = 10 \text{mA}, 2.75 \text{V} \le \text{V}_{IN} \le 7 \text{V}$		0.005	0.2	%
	LMS1585A/87-3.3				
	$I_{OUT} = 0$ mA, 4.75V $\leq V_{IN} \leq 7$ V		0.005	0.2	%
	LMS1587-1.5				
	$I_{OUT} = 0 \text{mA}, 3 \text{V} \le \text{V}_{IN} \le 7 \text{V}$		0.005	0.2	%
Load Regulation	LMS1585A-ADJ		0.05	0.3	<u> </u>
(Note 6)	$V_{IN}-V_{OUT} = 3V$, $10mA \le I_{OUT} \le 5A$		0.05	0.5	%
	LMS1585A-3.3		0.05	0.3	<u> </u>
	$V_{IN} = 5V, 0 \le I_{OUT} \le 5A$		0.05	0.5	%
	LMS1587-ADJ		0.05	0.3	<u> </u>
	$V_{IN}-V_{OUT} = 3V$, $10mA \le I_{OUT} \le 3A$		0.05	0.5	%
	LMS1587-1.5		0.05	0.3	%
	$V_{IN} = 5V, 0 \le I_{OUT} \le 3A$		0.05		%
	LMS1587-3.3		0.05		<u> </u>
	$V_{IN} = 5V, 0 \le I_{OUT} \le 3A$		0.05	0.5	%
Dropout Voltage					<u> </u>
	$\Delta V_{\text{REF}} = 1\%$, $I_{\text{OUT}} = 3A$		1.15	1.3	V I
					<u> </u>
			1.15	1.3	V I
					<u> </u>
			1.2	1.4	l v
					<u> </u>
			1.2	1.4	V V
Current Limit					<u> </u>
		5.0	6.6		A
			-		<u> </u>
		3.1	4.3		A
					+
		3,100	3,750		A
_	(Note 6)	$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$

Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	Min (Note 5)	Typ (Note 4)	Max (Note 5)	Units
	Minimum Load	LMS1585A/87-ADJ				
	Current (Note 7)	$1.5V \le V_{IN} - V_{OUT} \le 5.75V$		2.0	10.0	mA
	Quiescent Current	LMS1585A-3.3/LMS1587-3.3/LMS1587-1.5 V _{IN} = 5V		7.0	13.0	mA
	Thermal Regulation	T _A = 25°C, 30ms Pulse		0.003		%/W
	Ripple Rejection	LMS1585A-ADJ $f_{RIPPLE} = 120Hz, V_{IN}-V_{OUT} = 3V, I_{OUT} = 5A$ $C_{OUT} = 25\mu$ F Tantalum		72		dB
		LMS1585-3.3 $f_{RIPPLE} = 120Hz$, $C_{OUT} = 25\mu$ F Tantalum, $I_{OUT} = 5A$, $V_{IN} = 6.3V$		72		dB
		LMS1587-ADJ $f_{RIPPLE} = 120Hz, V_{IN}-V_{OUT} = 3V, I_{OUT} = 3A$ $C_{OUT} = 25\mu$ F Tantalum		72		dB
		LMS1587-1.5 $f_{RIPPLE} = 120Hz$, $C_{OUT} = 25\mu$ F Tantalum, $I_{OUT} = 3A$, $V_{IN} = 4.5V$	60	72		dB
		LMS1587-3.3 $f_{RIPPLE} = 120Hz$, $C_{OUT} = 25\mu$ F Tantalum, $I_{OUT} = 3A$, $V_{IN} = 6.3V$		72		dB
	Adjust Pin Current			55	120	μA
	Adjust Pin Current	$10\text{mA} \le I_{OUT} \le I_{FULLLOAD},$ $1.5\text{V} \le \text{V}_{IN}-\text{V}_{OUT} \le 5.75\text{V}$ (Note 8)		0.2		μA
	Temperature Stability			0.5		%
	Long Term Stability	T _A = 125°C, 1000Hrs		0.03		%
	RMS Output Noise (% of V _{OUT})	$10Hz \le f \le 10kHz$		0.003		%
	Thermal Resistance Junction-to-Case	3-Lead TO-263: Control/Output Section 3-Lead TO-220: Control/Output Section			0.65/2.7 0.65/2.7	°C/V °C/V

Typicals and limits appearing in normal type apply for $T_J = 25^{\circ}$ C. Limits appearing in **Boldface** type apply over the entire junction temperature range for operation, 0°C to 125°C for commercial grade and -40°C to 125°C for industrial grade.

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

Note 2: The maximum power dissipation is a function of $T_{J(max)}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(max)} - T_A)/\theta_{JA}$. All numbers apply for packages soldered directly into a PC board.

Note 3: For testing purposes, ESD was applied using human body model, $1.5k\Omega$ in series with 100pF.

Note 4: Typical Values represent the most likely parametric norm.


Note 5: All limits are guaranteed by testing or statistical analysis.


Note 6: Load and line regulation are measured at constant junction temperature, and are guaranteed up to the maximum power dissipation of 30W. Power dissipation is determined by the input/output differential and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range. **Note 7:** The minimum output current required to maintain regulation.

Note 8: I_{FULLLOAD} is 5A for LMS1585A and 3A for LMS1587.

Note 9: Consult factory for other fixed voltage options.



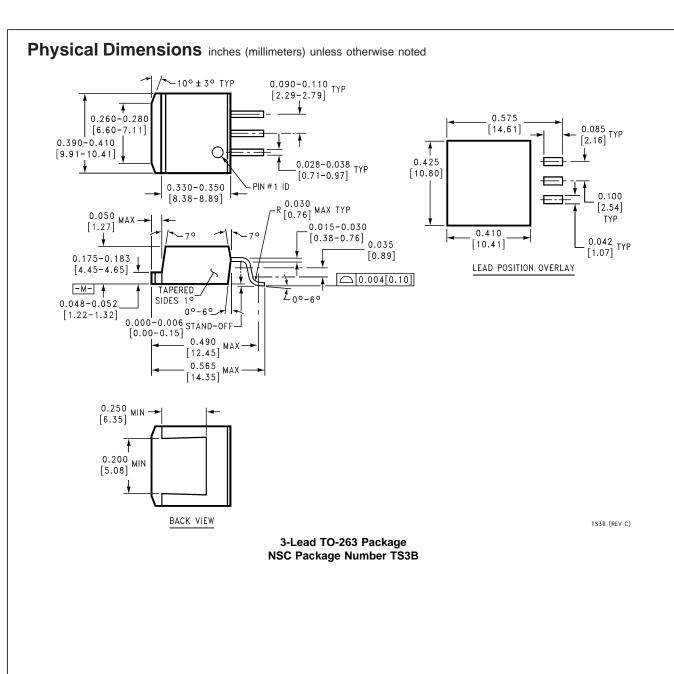

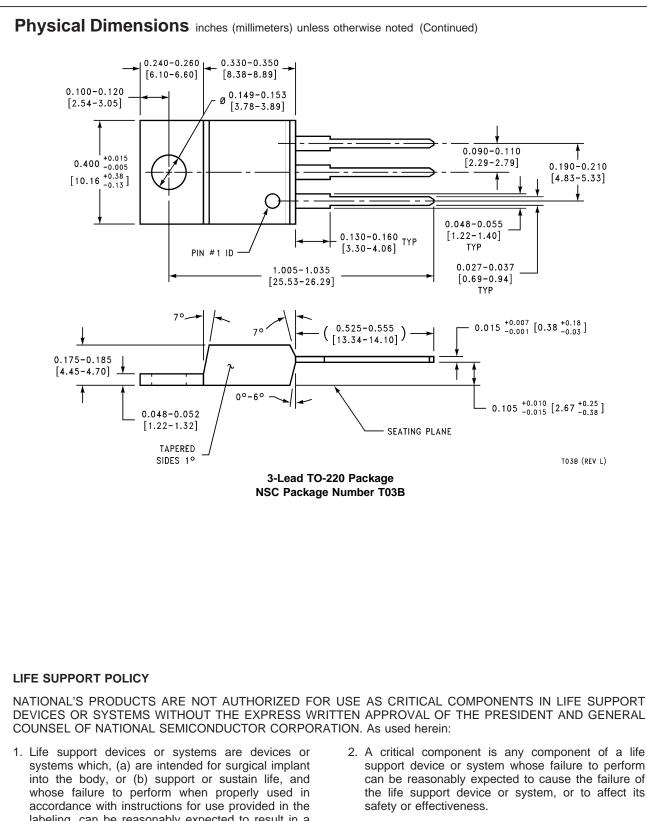

LMS1585A/LMS1587 5A Low Dropout Fast Response Regulators

DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL

- labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its

National Semiconductor National Semiconductor Corporation Europe Americas Fax: +49 (0) 180-530 85 86 Tel: 1-800-272-9959 Email: europe.support@nsc.com Deutsch Tel: +49 (0) 69 9508 6208 English Tel: +44 (0) 870 24 0 2171 Fax: 1-800-737-7018 Email: support@nsc.com Français Tel: +33 (0) 1 41 91 8790 www.national.com

National Semiconductor Asia Pacific Customer Response Group Tel: 65-2544466 Fax: 65-2504466 Email: ap.support@nsc.com

National Semiconductor Japan Ltd. Tel: 81-3-5639-7560 Fax: 81-3-5639-7507

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.