4-Wide OR-AND/OR-AND Gate


The MC10121 is a basic logic building block providing the simultaneous OR-AND/OR-AND-Invert function, useful in data control and digital multiplexing applications.

 $P_D = 100 \text{ mW typ/pkg (No Load)}$


 $t_{pd} = 2.3 \text{ ns typ}$

 t_r , $t_f = 2.5 \text{ ns typ } (20\%-80\%)$


LOGIC DIAGRAM

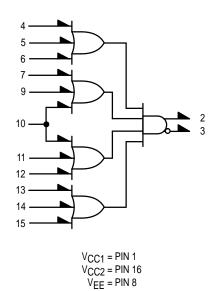

MC10121



DIP PIN ASSIGNMENT



Pin assignment is for Dual-in-Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–11 of the Motorola MECL Data Book (DL122/D).

ELECTRICAL CHARACTERISTICS

			Test Limits							
		Pin Under	-30	−30°C		+25°C		+85°C		1
Characteristic	Symbol	Test	Min	Max	Min	Тур	Max	Min	Max	Unit
Power Supply Drain Current	ΙE	8		29		20	26		29	mAdc
Input Current	l _{inH}	7 9 10		390 390 495			245 245 310		245 245 310	μAdc
	linL	7 9 10	0.5 0.5 0.5		0.5 0.5 0.5			0.3 0.3 0.3		μAdc
Output Voltage Logic	1 V _{OH}	3 2	-1.060 -1.060	-0.890 -0.890	-0.960 -0.960		-0.810 -0.810	-0.890 -0.890	-0.700 -0.700	Vdc
Output Voltage Logic	0 V _{OL}	3 2	-1.890 -1.890	-1.675 -1.675	-1.850 -1.850		-1.650 -1.650	-1.825 -1.825	-1.615 -1.615	Vdc
Threshold Voltage Logic	1 V _{OHA}	3 2	-1.080 -1.080		-0.980 -0.980			-0.910 -0.910		Vdc
Threshold Voltage Logic	0 V _{OLA}	3 2		-1.655 -1.655			-1.630 -1.630		-1.595 -1.595	Vdc
Switching Times (50Ω Loa	d)									ns
Propagation Delay	t4+3- t4-3+ t4+2+ t4-2-	3 3 2 2	1.4 1.4 1.4 1.4	3.6 3.6 3.6 3.6	1.4 1.4 1.4 1.4	2.3 2.3 2.3 2.3	3.4 3.4 3.4 3.4	1.4 1.4 1.4 1.4	3.5 3.5 3.5 3.5	
Rise Time (20 to 80°	(6) t ₃₊ t ₂₊	3 2	0.9 0.9	4.1 4.1	1.1 1.1	2.5 2.5	4.0 4.0	1.1 1.1	4.6 4.6	
Fall Time (20 to 80°	6) t ₃ _ t ₂ _	3 2	0.9 0.9	4.1 4.1	1.1 1.1	2.5 2.5	4.0 4.0	1.1 1.1	4.6 4.6	

MOTOROLA 3–74


ELECTRICAL CHARACTERISTICS (continued)

				TEST VOLTAGE VALUES (Volts)					
		@ Test Te	mperature	V _{IHmax}	V _{ILmin}	VIHAmin	V _{ILAmax}	VEE	
			–30°C	-0.890	-1.890	-1.205	-1.500	-5.2	
			+25°C	-0.810	-1.850	-1.105	-1.475	-5.2	
			+85°C	-0.700	-1.825	-1.035	-1.440	-5.2	
Pin Under			TEST VOLTAGE APPLIED TO PINS LISTED BELOW					(//)	
Characteristic		Symbol	Test	V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}	(V _{CC}) Gnd
Power Supply Drain Current		ΙE	8					8	1, 16
Input Current		l _{inH}	7 9 10	7 9 10				8 8 8	1, 16 1, 16 1, 16
		linL	7 9 10		7 9 10			8 8 8	1, 16 1, 16 1, 16
Output Voltage	Logic 1	Voн	3 2	4, 10, 13				8 8	1, 16 1, 16
Output Voltage	Logic 0	VOL	3 2	4, 10, 13				8 8	1, 16 1, 16
Threshold Voltage	Logic 1	Vона	3 2	10, 13		4	4	8 8	1, 16 1, 16
Threshold Voltage	Logic 0	VOLA	3 2	10, 13		4	4	8 8	1, 16 1, 16
Switching Times	(50Ω Load)			+1.11V		Pulse In	Pulse Out	−3.2 V	+2.0 V
Propagation Delay		t ₄₊₃ - t ₄₋₃₊ t ₄₊₂₊ t ₄₋₂₋	3 3 2 2	10, 13 10, 13 10, 13 10, 13		4 4 4 4	3 3 2 2	8 8 8 8	1, 16 1, 16 1, 16 1, 16
Rise Time	(20 to 80%)	t ₃₊ t ₂₊	3 2	10, 13 10, 13		4 4	3 2	8 8	1, 16 1, 16
Fall Time	(20 to 80%)	t3- t2-	3 2	10, 13 10, 13		4 4	3 2	8 8	1, 16 1, 16

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.


3–75 MOTOROLA

OUTLINE DIMENSIONS

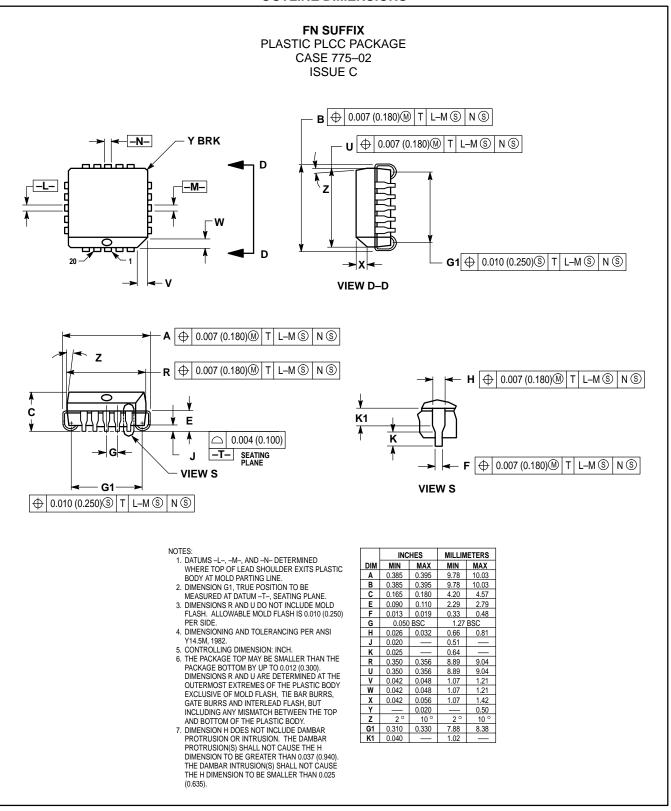

MOTOROLA 3–76


OUTLINE DIMENSIONS

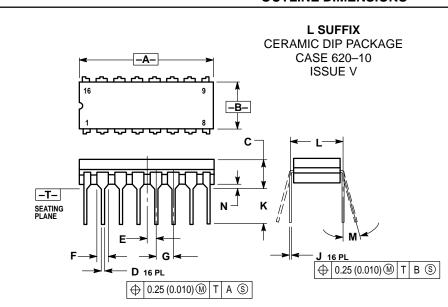

NOTES:

- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC

	INC	HES	MILLIMETERS		
DIM	MIN	MAX	MIN	MAX	
Α	0.750	0.785	19.05	19.93	
В	0.240	0.295	6.10	7.49	
С		0.200		5.08	
D	0.015	0.020	0.39	0.50	
Е	0.050	BSC	1.27 BSC		
F	0.055	0.065	1.40	1.65	
G	0.100 BSC		2.54 BSC		
Н	0.008	0.015	0.21	0.38	
K	0.125	0.170	3.18	4.31	
L	0.300	BSC	7.62 BSC		
M	0°	15°	0 °	15°	
N	0.020	0.040	0.51	1.01	

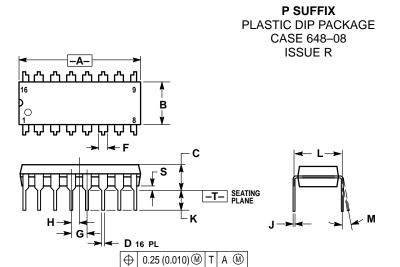

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL
- DIMENSION B DOES NOT INCLUDE MOLD FLASH.
- ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIMETERS			
DIM	MIN	MAX	MIN	MAX		
Α	0.740	0.770	18.80	19.55		
В	0.250	0.270	6.35	6.85		
C	0.145	0.175	3.69	4.44		
ם	0.015	0.021	0.39	0.53		
F	0.040	0.70	1.02	1.77		
G	0.100	BSC	2.54 BSC			
Н	0.050	BSC	1.27 BSC			
7	0.008	0.015	0.21	0.38		
K	0.110	0.130	2.80	3.30		
L	0.295	0.305	7.50	7.74		
М	0°	10°	0°	10 °		
S	0.020	0.040	0.51	1.01		

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical parameters, including or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (A) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

Mfax™: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MC10121/D