## INTEGRATED CIRCUITS

# DATA SHEET

# 74ALVCH16821

20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

Product specification

1998 May 29

IC24 Data Handbook





# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

### 74ALVCH16821

#### **FEATURES**

- Wide supply voltage range of 1.2V to 3.6V
- Complies with JEDEC standard no. 8-1A
- Current drive ± 24 mA at 3.0 V
- CMOS low power consumption
- Direct interface with TTL levels
- MULTIBYTE<sup>TM</sup> flow-through standard pin-out architecture
- Low inductance multiple V<sub>CC</sub> and ground pins for minimum noise and ground bounce
- All data inputs have bus hold
- Output drive capability 50Ω transmission lines @ 85°C

#### DESCRIPTION

The 74ALVCH16821 has two 10-bit, edge triggered registers, with each register coupled to a 3-State output buffer. The two sections of each register are controlled independently by the clock (nCP) and Output Enable (nOE) control gates.

Each register is fully edge triggered. The state of each D input, one set-up time before the Low-to-High clock transition, is transferred to the corresponding flip-flop's Q output.

When  $n\overline{OE}$  is LOW, the data in the register appears at the outputs. When nOE is HIGH, the outputs are in high impedance OFF state. Operation of the nOE input does not affect the state of the flip-flops.

The 74ALVCH16821 has active bus hold circuitry which is provided to hold unused or floating data inputs at a valid logic level. This feature eliminates the need for external pull-up or pull-down resistors.

#### QUICK REFERENCE DATA

GND = 0V;  $T_{amb} = 25^{\circ}C$ ;  $t_r = t_f \le 2.5 \text{ns}$ 

SYMBOL	PARAMETER	CONDITI	ONS	TYPICAL	UNIT
t <sub>PHL</sub> /t <sub>PLH</sub>	Propagation delay nCP to nQ <sub>n</sub>	V <sub>CC</sub> = 2.5V, C <sub>L</sub> = 30pF V <sub>CC</sub> = 3.3V, C <sub>L</sub> = 50pF	2.6 2.5	ns	
Cl	Input capacitance		5.0	pF	
	Dower dissipation appositance per buffer	$V_1 = GND \text{ to } V_{CC}^{-1}$	33	pF	
C <sub>PD</sub>	Power dissipation capacitance per buffer	$\Lambda_1 = \text{GMD to } \Lambda^{CC}$ .	Outputs disabled	17	рг
F <sub>max</sub>	Maximum clock frequency	$V_{CC} = 2.5V, C_L = 30pF$ $V_{CC} = 3.3V, C_L = 50pF$		250 350	MHz

#### NOTE:

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$  where:

 $f_0 = OPD \times CC \times f_0$  and  $f_0 = OPD \times CC \times f_0$  which is input frequency in MHz;  $C_L = OPD \times f_0$  output frequency in MHz;  $V_{CC} = OPD \times f_0$  output frequ

#### ORDERING INFORMATION

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	DWG NUMBER	
56-Pin Plastic SSOP Type III	-40°C to +85°C	74ALVCH16821 DL	ACH16821 DL	SOT371-1	
56-Pin Plastic TSSOP Type II	-40°C to +85°C	74ALVCH16821 DGG	ACH16821 DGG	SOT364-1	

 $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ):


# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

### 74ALVCH16821

#### PIN DESCRIPTION

PIN NUMBER	SYMBOL	FUNCTION
55, 54, 52, 51, 49, 48, 47, 45, 44, 43	1D0 - 1D9	Data inputs
42, 41, 40, 38, 37, 36, 34, 33, 31, 30	2D0 - 2D9	Data inputs
2, 3, 5, 6, 8, 9, 10, 12, 13, 14	1Q0 - 1Q9	Data outputs
15, 16, 17, 19, 20, 21, 23, 24, 26, 27	2Q0 - 2Q9	Data outputs
1, 28	10E, 20E	Output enable inputs (active-Low)
56, 29	1CP, 2CP	Clock pulse inputs (active rising edge)
4, 11, 18, 25, 32, 39, 46, 53	GND	Ground (0V)
7, 22, 35, 50	V <sub>CC</sub>	Positive supply voltage

#### **PIN CONFIGURATION**

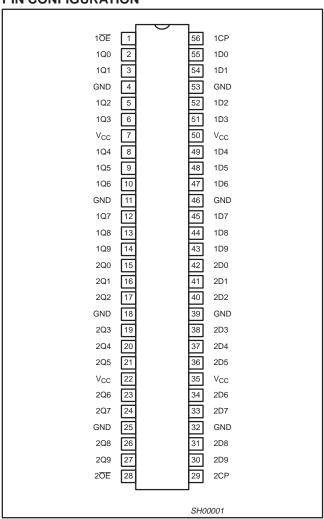

#### **FUNCTION TABLE**

	INPUTS		OUTPUT
nŌĒ	СР	Dx	Q
L	1	L	L
L	1	Н	Н
L	‡	Х	Q0
Н	X	Х	Z

H = HIGH voltage level

L = LOW voltage level


X = Don't care

Z = High impedance OFF state

↑ = LOW to HIGH clock transition

‡ = Not a LOW-to-HIGH clock transition


#### **LOGIC SYMBOL**

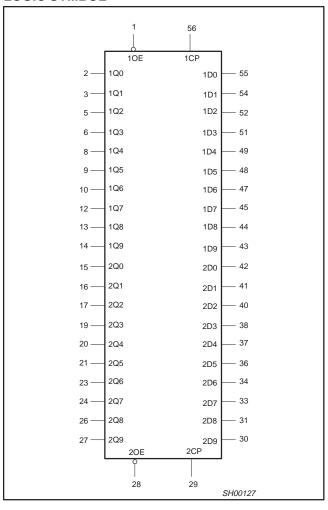


# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

# 74ALVCH16821



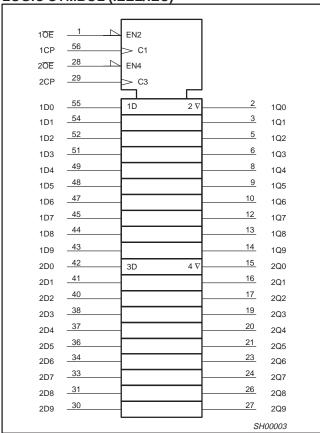

#### **LOGIC DIAGRAM**

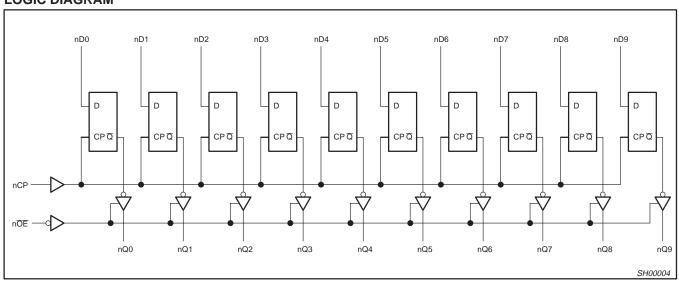

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

# 74ALVCH16821

#### **RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER	CONDITIONS	LIM	IITS	UNIT	
STWIBOL	PARAMETER	CONDITIONS	MIN MAX		ONII	
V	DC supply voltage 2.5V range (for max. speed performance @ 30 pF output load)		2.3	2.7	V	
V <sub>CC</sub>	DC supply voltage 3.3V range (for max. speed performance @ 50 pF output load)		3.0	3.6	V	
VI	DC Input voltage range		0	V <sub>CC</sub>	V	
Vo	DC output voltage range		0	V <sub>CC</sub>	V	
T <sub>amb</sub>	Operating free-air temperature range		-40	+85	°C	
t <sub>r</sub> , t <sub>f</sub>	Input rise and fall times	$V_{CC} = 2.3 \text{ to } 3.0 \text{V}$ $V_{CC} = 3.0 \text{ to } 3.6 \text{V}$	0	20 10	ns/V	

#### **ABSOLUTE MAXIMUM RATINGS**

In accordance with the Absolute Maximum Rating System (IEC 134) Voltages are referenced to GND (ground = 0V)

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V <sub>CC</sub>	DC supply voltage		-0.5 to +4.6	V
I <sub>IK</sub>	DC input diode current	V <sub>1</sub> < 0	<b>–</b> 50	mA
VI	DC input voltage	For control pins <sup>1</sup>	-0.5 to +4.6	V
٧١	DC input voltage	For data inputs <sup>1</sup>	–0.5 to V <sub>CC</sub> +0.5	1 °
I <sub>OK</sub>	DC output diode current	$V_O > V_{CC}$ or $V_O < 0$	±50	mA
Vo	DC output voltage	Note 1	–0.5 to V <sub>CC</sub> +0.5	V
I <sub>O</sub>	DC output source or sink current	$V_O = 0$ to $V_{CC}$	±50	mA
I <sub>GND</sub> , I <sub>CC</sub>	DC V <sub>CC</sub> or GND current		± 100	mA
T <sub>stg</sub>	Storage temperature range		-65 to +150	°C
P <sub>TOT</sub>	Power dissipation per package –plastic medium-shrink (SSOP) –plastic thin-medium-shrink (TSSOP)	For temperature range: –40 to +125 °C above +55°C derate linearly with 11.3 mW/K above +55°C derate linearly with 8 mW/K	850 600	mW

#### NOTE

1998 May 29 5

<sup>1.</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

# 74ALVCH16821

#### DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions. Voltage are referenced to GND (ground = 0 V).

				LIMITS		
SYMBOL	PARAMETER	TEST CONDITIONS	Temp :	= -40°C to +8	5°C	UNIT
			MIN	TYP <sup>1</sup>	MAX	1
.,		V <sub>CC</sub> = 2.3 to 2.7V	1.7	1.2		<b>1</b>
$V_{IH}$	HIGH level Input voltage	V <sub>CC</sub> = 2.7 to 3.6V	2.0	1.5		· ·
	LOW lovel leavet value	V <sub>CC</sub> = 2.3 to 2.7V		1.2	0.7	V
$V_{IL}$	LOW level Input voltage	V <sub>CC</sub> = 2.7 to 3.6V		1.5	0.8	1 °
		$V_{CC}$ = 2.3 to 3.6V; $V_I$ = $V_{IH}$ or $V_{IL}$ ; $I_O$ = $-100\mu A$	V <sub>CC</sub> -0.2	V <sub>CC</sub>		
		$V_{CC} = 2.3V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = -6mA$	V <sub>CC</sub> -0.3	V <sub>CC</sub> -0.08		1
	LHCLL lovel output voltage	$V_{CC} = 2.3V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = -12mA$	V <sub>CC</sub> -0.6	V <sub>CC</sub> -0.26		
$V_{OH}$	HIGH level output voltage	$V_{CC} = 2.7V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = -12mA$	V <sub>CC</sub> -0.5	V <sub>CC</sub> -0.14		1 °
		$V_{CC} = 3.0V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = -12mA$	V <sub>CC</sub> -0.6	V <sub>CC</sub> -0.09		1
		$V_{CC} = 3.0V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = -24$ mA	V <sub>CC</sub> -1.0	V <sub>CC</sub> -0.28		1
		$V_{CC}$ = 2.3 to 3.6V; $V_I$ = $V_{IH}$ or $V_{IL}$ ; $I_O$ = 100 $\mu$ A		GND	0.20	٧
		$V_{CC} = 2.3V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = 6mA$		0.07	0.40	V
$V_{OL}$	LOW level output voltage	$V_{CC} = 2.3V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = 12mA$		0.15	0.70	
		$V_{CC} = 2.7V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = 12mA$		0.14	0.40	V
		$V_{CC} = 3.0V$ ; $V_I = V_{IH}$ or $V_{IL}$ ; $I_O = 24mA$		0.27	0.55	]
IĮ	Input leakage current	$V_{CC} = 2.3 \text{ to } 3.6V;$ $V_I = V_{CC} \text{ or GND}$		0.1	5	μА
I <sub>OZ</sub>	3-State output OFF-state current	$V_{CC}$ = 2.7 to 3.6V; $V_I$ = $V_{IH}$ or $V_{IL}$ ; $V_O$ = $V_{CC}$ or GND		0.1	10	μА
I <sub>CC</sub>	Quiescent supply current	$V_{CC} = 2.3$ to 3.6V; $V_I = V_{CC}$ or GND; $I_O = 0$		0.2	40	μА
$\Delta I_{CC}$	Additional quiescent supply current	$V_{CC} = 2.3V$ to 3.6V; $V_I = V_{CC} - 0.6V$ ; $I_O = 0$		150	750	μА
	Due hold I OW quetoining gurrent	$V_{CC} = 2.3V; V_I = 0.7V^2$	45	-		
I <sub>BHL</sub>	Bus hold LOW sustaining current	$V_{CC} = 3.0V; V_I = 0.8V^2$	75	150		μΑ
I	Rue hold HIGH custaining current	$V_{CC} = 2.3V; V_I = 1.7V^2$	-45			
I <sub>BHH</sub>	Bus hold HIGH sustaining current	$V_{CC} = 3.0V; V_1 = 2.0V^2$	-75	-175		μΑ
I <sub>BHLO</sub>	Bus hold LOW overdrive current	$V_{CC} = 3.6V^2$	500			μΑ
I <sub>BHHO</sub>	Bus hold HIGH overdrive current	$V_{CC} = 3.6V^2$	-500			μА

All typical values are at T<sub>amb</sub> = 25°C.
 Valid for data inputs of bus hold parts.

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

74ALVCH16821

### AC CHARACTERISTICS FOR $V_{CC} = 2.3V$ TO 2.7V RANGE

 $GND = 0V; \ t_r = t_f \leq 2.0 ns; \ C_L = 30 pF$ 

				LIMITS		
SYMBOL	PARAMETER	WAVEFORM	٧c	UNIT		
			MIN	TYP <sup>1</sup>	MAX	1
t <sub>PLH</sub> /t <sub>PHL</sub>	Propagation delay nCP to nQ <sub>n</sub>	1, 4	1.0	2.6	5.8	ns
t <sub>PZH</sub> /t <sub>PZL</sub>	3-State output enable time $n\overline{OE}_n$ to $nQ_n$	2, 4	1.0	2.8	6.6	ns
t <sub>PHZ</sub> /t <sub>PLZ</sub>	3-State output disable time $n\overline{\text{OE}}_n$ to $nQ_n$	2, 4	1.0	2.2	5.7	ns
t <sub>W</sub>	nCP pulse width HIGH or LOW	3, 4	3.0	1.8		ns
t <sub>SU</sub>	Set up time nD <sub>n</sub> to nCP	3, 4	1.4	0.3		ns
t <sub>h</sub>	Hold time nD <sub>n</sub> to nCP	3, 4	0.4	0.0		ns
F <sub>max</sub>	Maximum clock pulse frequency	1, 4	150	250		MHz

# AC CHARACTERISTICS FOR $V_{CC}$ = 3.0V TO 3.6V RANGE AND $V_{CC}$ = 2.7V GND = 0V; $t_r = t_f \le 2.5$ ns; $C_L = 50$ pF

					LIM	ITS			
SYMBOL	PARAMETER	WAVEFORM	٧ <sub>C</sub>	$_{\text{C}}$ = 3.3 $\pm$ 0	.3V	'	UNIT		
			MIN	TYP <sup>1</sup>	MAX	MIN	TYP <sup>1</sup>	MAX	
t <sub>PHL</sub> /t <sub>PLH</sub>	Propagation delay nCP to nQ <sub>n</sub>	1, 4	1.0	2.5	4.5	1.0	2.8	5.3	ns
t <sub>PZH</sub> /t <sub>PZL</sub>	3-State output enable time nOE <sub>n</sub> to nQ <sub>n</sub>	2, 4	1.0	2.3	5.1	1.0	3.2	6.2	ns
t <sub>PHZ</sub> /t <sub>PLZ</sub>	3-State output disable time nOE <sub>n</sub> to nQ <sub>n</sub>	2, 4	1.0	2.8	4.6	1.0	3.1	5.0	ns
t <sub>W</sub>	nCP pulse width HIGH or LOW	3, 4	3.3	0.2		3.3	1.7		ns
t <sub>SU</sub>	Set up time nD <sub>n</sub> to nCP	3, 4	1.0	0.2		1.2	0.3		ns
t <sub>h</sub>	Hold time nD <sub>n</sub> to nCP	3, 4	0.8	0.4		0.6	-0.3		ns
F <sub>max</sub>	Maximum clock pulse frequency	1, 4	150	350		150	300		MHz

NOTES:

<sup>1.</sup> All typical values are at  $V_{CC}$  = 2.5V and  $T_{amb}$  = 25°C.

<sup>1.</sup> All typical values are at  $T_{amb} = 25$ °C.

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

### 74ALVCH16821


#### **AC WAVEFORMS**

## V<sub>CC</sub> = 2.3 TO 2.7 V RANGE


- $V_{M} = 0.5 V$
- 2.  $V_X = V_{OL} + 0.15V$
- 3.  $V_Y = V_{OH} 0.15V$
- 4. V<sub>I</sub> = V<sub>CC</sub>
  5. V<sub>OL</sub> and V<sub>OH</sub> are the typical output voltage drop that occur with the output load.

# $V_{CC}$ = 3.0 TO 3.6 V RANGE AND $V_{CC}$ = 2.7 V 1. $V_{M}$ = 1.5 V


- 2.  $V_X^{(1)} = V_{OL} + 0.3V$
- 3.  $V_Y = V_{OH} 0.3V$ 4.  $V_I = 2.7 V$
- 5. VOL and VOH are the typical output voltage drop that occur with the output load.



The input (nCP) to output propagation delays.




Waveform 2. The 3-State enable and disable times.



Waveform 3. Set up and hold times.

#### **TEST CIRCUIT**




Waveform 4. Load circuitry for switching times

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

## 74ALVCH16821

### SSOP56: plastic shrink small outline package; 56 leads; body width 7.5 mm

SOT371-1

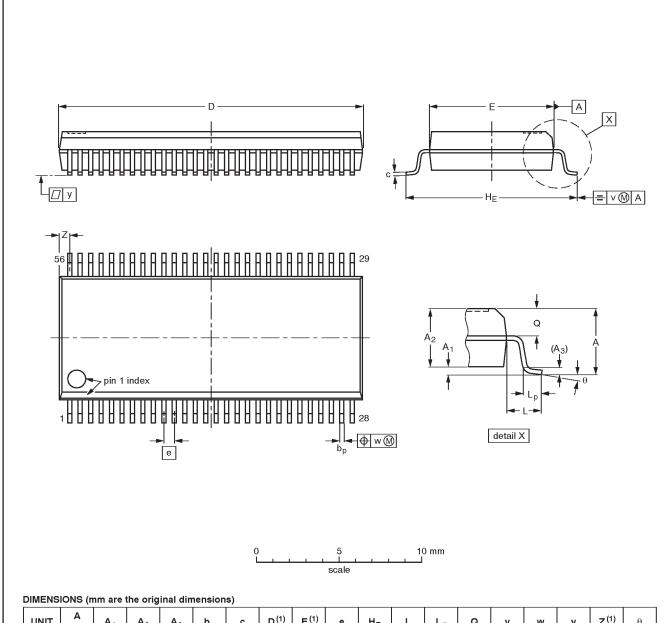

UNIT	A max.	Α <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	bp	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	Z <sup>(1)</sup>	θ
mm	2.8	0.4 0.2	2.35 2.20	0.25	0.3 0.2	0.22 0.13	18.55 18.30	7.6 7.4	0.635	10.4 10.1	1.4	1.0 0.6	1.2 1.0	0.25	0.18	0.1	0.85 0.40	8° 0°

#### Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.


OUTLINE		EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT371-1		MO-118AB				<del>93-11-02</del> 95-02-04

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

## 74ALVCH16821

#### TSSOP56: plastic thin shrink small outline package; 56 leads; body width 6.1mm

SOT364-1

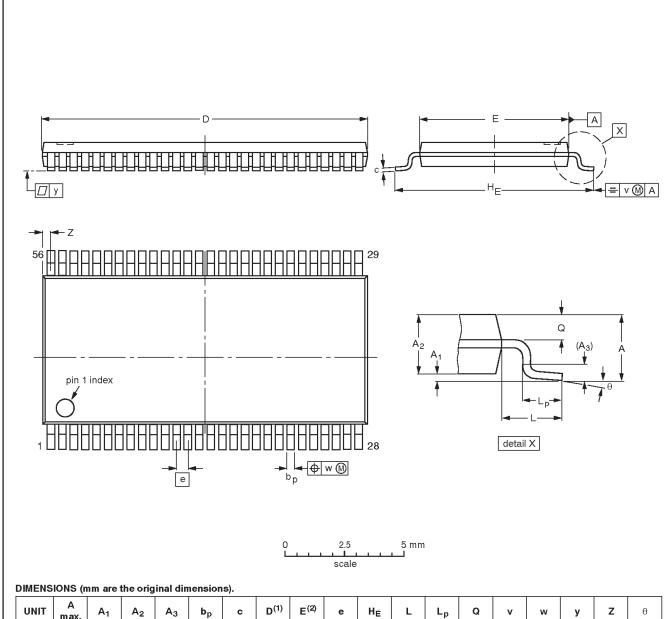

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	А3	bp	С	D <sup>(1)</sup>	E <sup>(2)</sup>	е	HE	L	Lp	Q	٧	w	у	z	θ
mm	1.2	0.15 0.05	1.05 0.85	0.25	0.28 0.17	0.2 0.1	14.1 13.9	6.2 6.0	0.5	8.3 7.9	1.0	0.8 0.4	0.50 0.35	0.25	0.08	0.1	0.5 0.1	8° 0°

#### Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN	ISSUE DATE
	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT364-1		MO-153EE				<del>-93-02-03</del> 95-02-10

1998 May 29 10

20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

74ALVCH16821

**NOTES** 

# 20-bit bus-interface D-type flip-flop; positive-edge trigger (3-State)

74ALVCH16821

#### Data sheet status

Data sheet status	Product status	Definition [1]	
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.	
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make chages at any time without notice in order to improve design and supply the best possible product.	
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product	

<sup>[1]</sup> Please consult the most recently issued datasheet before initiating or completing a design.

#### **Definitions**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### **Disclaimers**

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1998 All rights reserved. Printed in U.S.A.

print code Date of release: 05-96

Document order number: 9397-750-04553

Let's make things better.

Philips Semiconductors



