TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC74HC257AP, TC74HC257AF, TC74HC257AFN

QUAD 2 - CHANNEL MULTIPLEXER (3 - STATE)

The TC74HC257A is high speed CMOS MULTIPLEXER fabricated with silicon gate C2MOS technology.

It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

It is composed of four independent 2 - channel multiplexers with common SELECT and OUTPUTENABLE (OE).


If \overline{OE} is set low, the outputs are held in a high-impedance state. When SELECT is set low, "A" data inputs are enabled. Conversely, when SELECT is high, "B" data inputs are enabled.

All inputs are equipped with protection circuits against static discharge or transient excess voltage.

FEATURES:

- High Speed-----t_{pd} = 10ns(typ.) at V_{CC} = 5V
- Low Power Dissipation $I_{CC} = 4\mu A(Max.)$ at $Ta = 25^{\circ}C$
- High Noise Immunity $V_{NIH} = V_{NIL} = 28\% V_{CC}$ (Min.)
- Output Drive Capability 15 LSTTL Loads
- Symmetrical Output Impedance... | I_{OH} | = I_{OL} = 6mA(Min.)
- Balanced Propagation Delays $\cdots t_{pLH} \simeq t_{pHL}$
- Wide Operating Voltage Range ···· V_{CC} (opr.) = 2V~6V
- Pin and Function Compatible with 74LS257

(Note) The JEDEC SOP (FN) is not available in Japan.



PIN ASSIGNMENT 16 V_{CC} SELECT 1 15 <u>OE</u> 1A 2 1B 3 4A 1Y 4 **4B** 13 2A 5 12 4Y 2B 6 3A 11 2Y 7 10 3B GND 8 3Y (TOP VIEW)


TRUTH TABLE

	INPL	OUTPUT		
ŌĒ	SELECT	Α	В	Y
Н	Х	Х	Х	Z
L	L	L	Х	L
L	L	Н	Х	Н
L	Н	Х	L	L
L	Н	Х	Н	Н

X : Don't Care Z : High Impedance

1

IEC LOGIC SYMBOL



ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	V _{cc}	− 0.5~7	V
DC Input Voltage	V _{IN}	$-0.5 \sim V_{CC} + 0.5$	V
DC Output Voltage	V _{OUT}	−0.5~V _{CC} + 0.5	V
Input Diode Current	I _{IK}	± 20	mA
Output Diode Current	I _{OK}	± 20	mA
DC Output Current	I _{OUT}	±35	mA
DC V _{CC} / Ground Current	I _{cc}	± 75	mA
Power Dissipation	P _D	500 (DIP)* / 180 (SOP)	mW
Storage Temperature	T _{stg}	−65~150	°C

*500mW in the range of Ta= $-40^{\circ}\text{C}\sim65^{\circ}\text{C}$. From Ta=65°C to 85°C a derating factor of $-10\text{mW}/^{\circ}\text{C}$ shall be applied until 300mW.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V _{CC}	2~6	V
Input Voltage	V _{IN}	0∼V _{cc}	V
Output Voltage	V _{OUT}	0~V _{cc}	V
Operating Temperature	T _{opr}	−40~85	°C
Input Rise and Fall Time	t _r , t _f	$0 \sim 1000 (V_{CC} = 2.0V)$ $0 \sim 500 (V_{CC} = 4.5V)$ $0 \sim 400 (V_{CC} = 6.0V)$	ns

DC ELECTRICAL CHARACTERISTICS

De ELECTRICAL CHARACTERISTICS										
PARAMETER	SYMBOL	TEST CONDITION		V _{CC}	1	Ta = 25°C		$Ta = -40 \sim 85^{\circ}C$		UNIT
TANAIVIETEN	3 T IVIBOL			(V)	MIN.	TYP.	MAX.	MIN.	MAX.	
High - Level Input Voltage	VIH				1.50 3.15 4.20	111	_ _ _	1.50 3.15 4.20	_ _ _	٧
Low - Level Input Voltage	VIL						0.50 1.35 1.80		0.50 1.35 1.80	٧
High - Level Output Voltage	V _{OH}	V _{IN} = V _{IH} or V _{IL}	$I_{OH} = -20\mu A$	2.0 4.5 6.0	1.9 4.4 5.9	2.0 4.5 6.0	_ _ _	1.9 4.4 5.9	_ _ _	v
			$I_{OH} = -6mA$ $I_{OH} = -7.8mA$	4.5 6.0	4.18 5.68	4.31 5.80	=	4.13 5.63	=	
Low - Level Output Voltage	$V_{OL} \qquad V_{IN} = V_{IH} \text{ or } V_{IL}$	V _{IN} =	$I_{OL} = 20 \mu A$	2.0 4.5 6.0	111	0.0 0.0 0.0	0.1 0.1 0.1	<u> </u>	0.1 0.1 0.1	v
		$I_{OL} = 6mA$ $I_{OL} = 7.8mA$	4.5 6.0	-	0.17 0.18	0.26 0.26	_	0.33 0.33		
3 - State Off Leak Current	l _{oz}	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $V_{OUT} = V_{CC} \text{ or GND}$		6.0	_	_	± 0.5	_	± 5.0	
Input Leakage Current	I _{IN}	$V_{IN} = V_{CC}$ or GND		6.0	_	_	± 0.1	_	± 1.0	μA
Quiescent Supply Current	I _{CC}	$V_{IN} = V_{CC}$ or GND		6.0	_		4.0	_	40.0	

2 2001-05-17

AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 6ns$)

	SYMBOL TEST CONDITIO		CL V _{cc}		Ta = 25°C			Ta = − 40~85°C		UNIT
PARAMETER	STIVIBUL	LEST CONDITION	(pF)	(V)	MIN.	TYP.	MAX.	MIN.	MAX.	OINII
Output Transition Time	t _{TLH}		50	2.0 4.5 6.0		20 6 5	60 12 10	_ _ _	75 15 13	
Propagation Delay Time	t _{pLH}		50	2.0 4.5 6.0	111	45 13 11	100 20 17	_ _ _	125 25 21	
$(A, B-Y, \overline{Y})$	t _{pHL}		150	2.0 4.5 6.0		62 18 15	140 28 24		175 35 30	
Propagation Delay Time	t _{pLH}		50	2.0 4.5 6.0		45 13 11	100 20 17	_ _ _	125 25 21	
$(SELECT-Y, \overline{Y})$	t _{pHL}		150	2.0 4.5 6.0		62 18 15	140 28 24	_ _ _	175 35 30	ns
3 — State Output	t _{pZL} t _{pZH}	$I R_1 = 1 \nu \Omega$	50	2.0 4.5 6.0		40 12 10	110 22 19	_ _ _	140 28 24	
Enable Time			150	2.0 4.5 6.0		57 17 14	150 30 26	_ _ _	190 38 33	
3 — State Output Enable Time	t _{pLZ}	$R_L = 1k\Omega$	50	2.0 4.5 6.0		28 14 13	140 28 24	_ _ _	175 35 30	
Input Capacitance	C _{IN}					5	10	_	10	
Output Capacitance	C _{OUT}					10	_	_	_	pF
Power Dissipation Capacitance	C _{PD} (1)				_	47	_	_	_	Γ.

Note (1) C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation:

 I_{CC} (opr) = $C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 4$ (per bit)

3 2001-05-17


DIP 16PIN PACKAGE DIMENSIONS (DIP16-P-300-2.54A)

Unit in mm

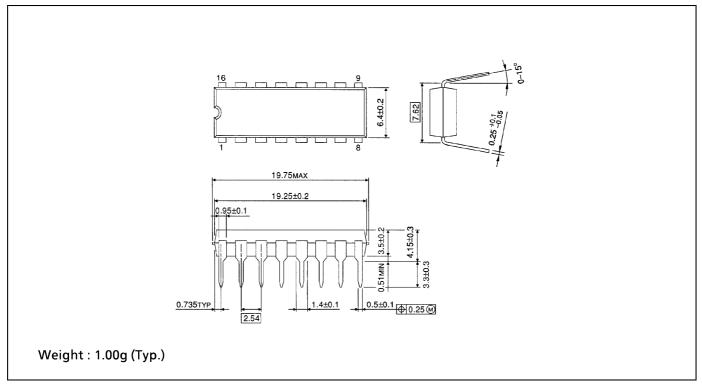

SOP 16PIN (200mil BODY) PACKAGE DIMENSIONS (SOP16-P-300-1.27)


Unit in mm

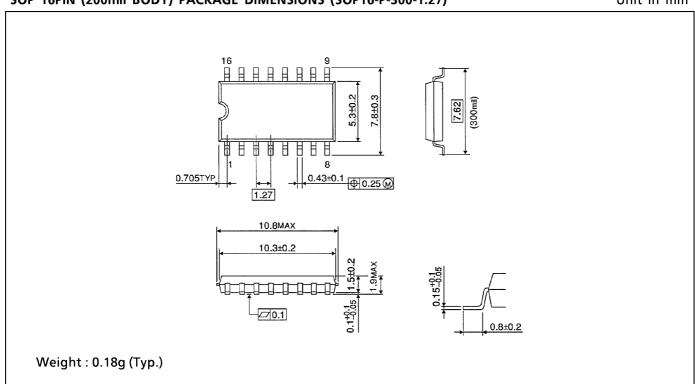

4

SOP 16PIN (150mil BODY) PACKAGE DIMENSIONS (SOL16-P-150 -1.27)

Unit in mm

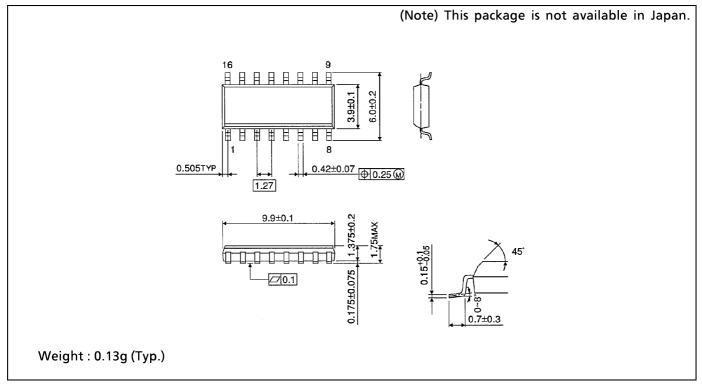

5

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

6 2001-05-17