


**FEATURES**

- . Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- . Metal sliicon junction ,majority carrier conduction
- . Guard ring for overcoltage protection
- . Low power loss,high efficiency
- . High current capability ,Low forward voltage drop
- . High surge capability
- . For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- . Dual rectifier construction
- . High temperature soldering guaranteed: 250°C/10 seconds

0.25"(6.35mm)from case

**MECHANICAL DATA**

- . **Case:** JEDEC DO-220AB molded plastic body
- . **Terminals:** lead solderable per MIL-STD-750,method 2026
- . **Polarity:** As marked. No suffix indicates Common Cathode, suffix "A" indicates Common Anode
- . **Mounting Position:** Any
- . **Weight:** 0.08 ounce, 2.24 grams

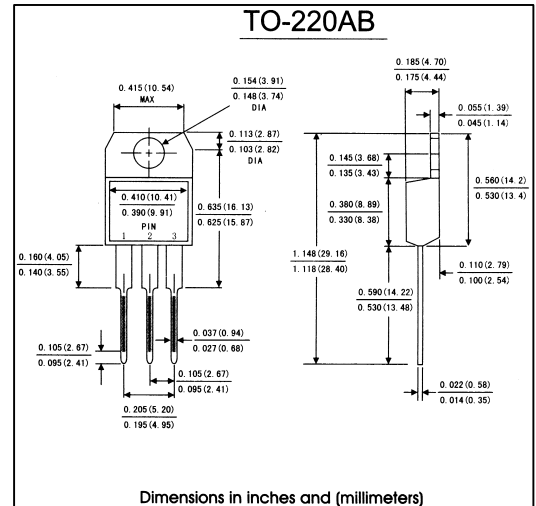

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase,half wave,resistive or inductive)

load. For capacitive load,derate by 20%)

	Symbols	SR1620	SR1630	SR1640	SR1650	SR1660	SR1680	SR16A0	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	Volts
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	57	71	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	Volts
Macimum average forward rectified current(see Fig.1)	I <sub>(AV)</sub>	16.0							Amps
Repetitive peak forward current(square wavr, 20KHz) at T <sub>c</sub> =105°C	I <sub>FRM</sub>	32.0							Amps
Peak forward surge current 8.3ms singel half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150.0							Amps
Maximum instantaneous forward voltage at 10 A(Note 1)	V <sub>F</sub>	0.65			0.75		0.80	0.85	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25°C	1.0							mA
	TA=125°C	30			50				
Typeical thermal resistance(Note 2)	R θ <sub>JC</sub>	3.0							°C/W
Operating junction temperature range	T <sub>J</sub>	-65 to +125			-65 to +150				°C
storage temperature range	T <sub>STG</sub>	-65 to +150							°C

- Notes:** 1. Pulse test: 300 μs pulse width,1% duty cycle  
2.Thermal resistance from junction to case

## RATINGS AND CHARACTERISTIC CURVES SR1620 THRU SR16A0

FIG.1-FORWARD CURRENT DERATING CURVE

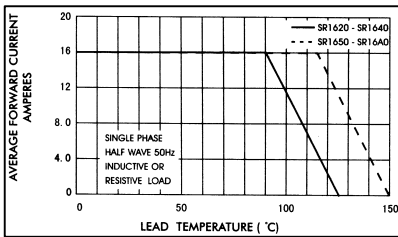


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

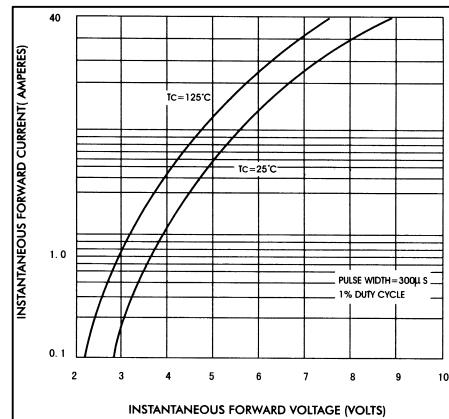


FIG.4-TYPICAL JUNCTION CAPACITANCE

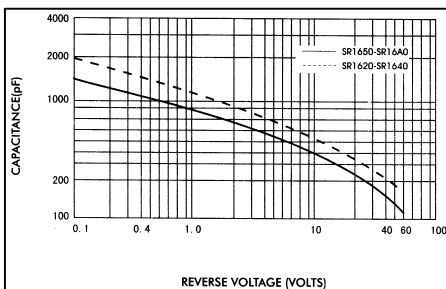


FIG.3-TYPICAL REVERSE CHARACTERISTICS

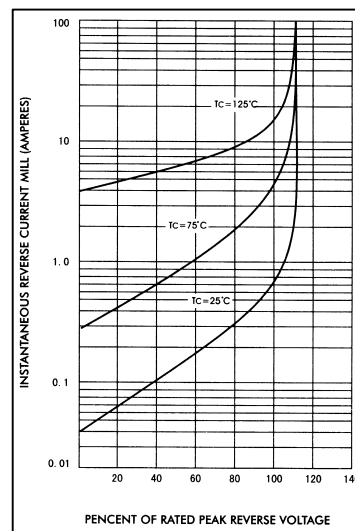


FIG.5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

