


FEATURES

- . Fast switching
- . Low leakage
- . Low forward voltage drop
- . High current capability
- . Glass passivated junction
- . High switching capability

MECHANICAL DATA

- . **Case:** JEDEC DO-15 molded plastic body
- . **Terminals:** Plated axial leads,solderable per MIL-STD-750,method 2026
- . **Polarity:** Color band denotes cathode end
- . **Mounting Position:** Any
- . **Weight:** 0.064 ounce, 0.39 gram

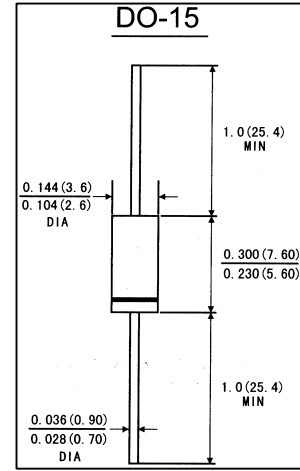

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase,half wave 60Hz,resistive or inductive) load. For capacitive load,derate current by 20%)

	Symbols	FR 201G	FR 202G	FR 203G	FR 204G	FR 205G	FR 206G	FR 207G	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Macimum average forward rectified current 0.375"(9.5mm)lead length at T _A =55°C	I _(AV)	2.0							Amp
Peak forward surge current 8.3ms sing-wave superimposed on rated load (JEDEC method)	I _{FSM}	60							Amps
Maximum instantaneous forward voltage at 2.0 A	V _F	1.3							Volts
Maximum DC Rreverse Current at rated DC blocking voltage	I _R	5.0							
Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T _L =55°C		100							μ A
Maximum reverse recovery time(Note 1)	T _{rr}	150				250	500		ns
Typical junction Capacitance(Note 2)	C _J	35							pF
Operating and storage temperature range	T _J T _{STG}	-65 to +150							°C

Notes: 1.Test conditions:I_F=0.5A,I_R=1.0A,I_{rr}=0.25A.

2.Measured at 1MHz and applied reverse voltage of 4.0V Volts

RATINGS AND CHARACTERISTIC CURVES FR201G THRU FR207G

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

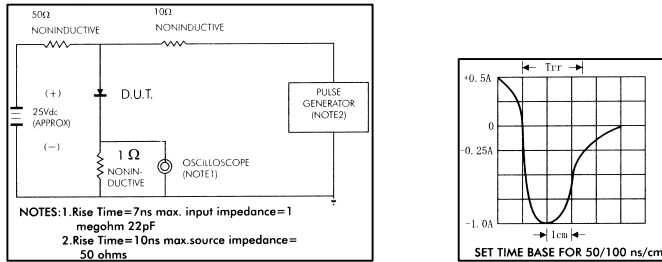


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE




FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

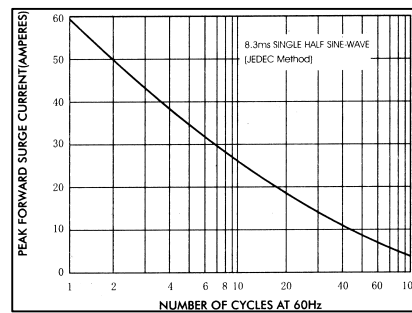


FIG.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

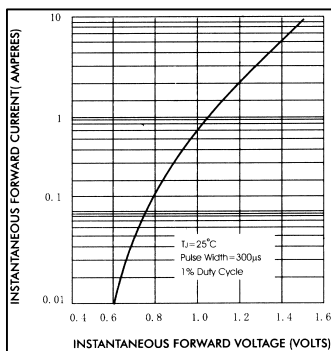


FIG.5-TYPICAL JUNCTION CAPACITANCE

