
SWITCHING AND AMPLIFIER APPLICATIONS

- Suitable for automatic insertion in thick and thin-film circuits
- LOW NOISE: BC849, BC850
- Complement to BC856 ... BC860

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector Base Voltage	V_{CBO}		
: BC846		80	V
: BC847/850		50	V
: BC848/849		30	V
Collector Emitter Voltage	V_{CEO}		
: BC846		65	V
: BC847/850		45	V
: BC848/849		30	V
Emitter-Base Voltage	V_{EBO}		
: BC846/847		6	V
: BC848/849/850		5	V
Collector Current (DC)	I _C	100	mA
Collector Dissipation	Pc	310	mW
Junction Temperature	TJ	150	°C
Storage Temperature	T _{STG}	-65 ~ 150	°C

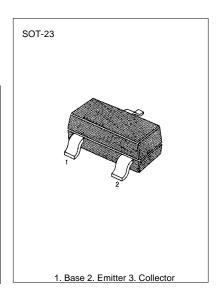

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Charac	teristic	Symbol	Test Conditions	Min	Тур	Max	Unit
Collector Cut-off Curr DC Current Gain Collector Emitter Satu Collector Base Satura Base Emitter On Volta Current Gain Bandwic	uration Voltage ation Voltage	$\begin{aligned} &I_{CBO} \\ &h_{FE} \\ &V_{CE} \text{ (sat)} \\ &V_{BE} \text{ (sat)} \\ &V_{BE} \text{ (on)} \\ &f_{T} \end{aligned}$	$\begin{array}{l} V_{CB}\!\!=\!\!30V, I_{E}\!\!=\!\!0 \\ V_{CE}\!\!=\!\!5V, I_{C}\!\!=\!\!2mA \\ I_{C}\!\!=\!\!10mA, I_{B}\!\!=\!\!0.5mA \\ I_{C}\!\!=\!\!100mA, I_{B}\!\!=\!\!5mA \\ I_{C}\!\!=\!\!100mA, I_{B}\!\!=\!\!5mA \\ I_{C}\!\!=\!\!100mA, I_{B}\!\!=\!\!5mA \\ V_{CE}\!\!=\!\!5V, I_{C}\!\!=\!\!2mA \\ V_{CE}\!\!=\!\!5V, I_{C}\!\!=\!\!10mA \\ V_{CE}\!\!=\!\!5V, I_{C}\!\!=\!\!10mA \\ V_{CE}\!\!=\!\!5V, I_{C}\!\!=\!\!10mA \\ I_{E}\!\!=\!\!100mA \\ I_{E}\!$	110 580	90 200 700 900 660	15 800 250 600 700 720	mV mV mV mV mV mV MHz
Collector Base Capacitance Emitter Base Capacitance Noise Figure : BC846/847/848 : BC849/850 : BC849 : BC850		C _{CBO} C _{EBO} NF	$\begin{array}{l} V_{CB}{=}10V,f{=}1MHz\\ V_{EB}{=}0.5V,f{=}1MHz\\ V_{CE}{=}5V,I_{C}{=}200\mu A\\ f{=}1KHz,R_{G}{=}2K\Omega\\ V_{CE}{=}5V,I_{C}{=}200\mu A\\ R_{G}{=}2K\Omega\\ f{=}30{\sim}15000Hz \end{array}$		3.5 9 2 1.2 1.4 1.4	10 4 4 3	pF pF dB dB dB dB


h_{FE} CLASSIFICATION

Classification	Α	В	С		
h _{FE}	110-220	200-450	420-800		

MARKING CODE

TYPE	846A	846B	846C	847A	847B	847C	848A	848B	848C	849A	849B	849C	850A	850B	850C
MARK	8AA	8AB	8AC	8BA	8BB	8BC	8CA	8CB	8CC	8DA	8DB	8DC	8EA	8EB	8EC



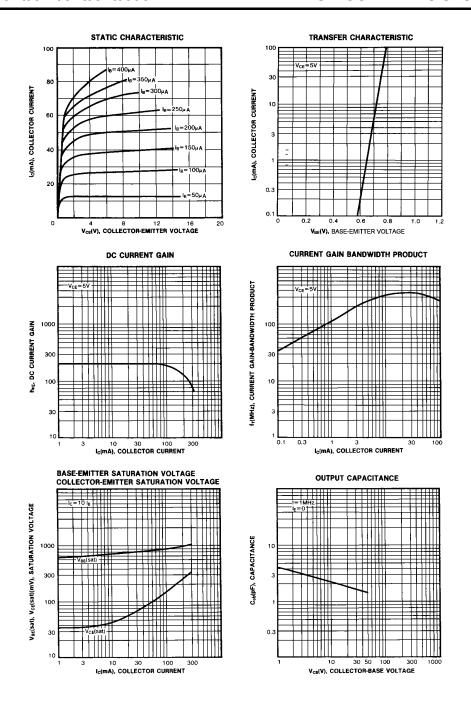



TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™ ISOPLANAR™ CoolFET™ MICROWIRE™

CROSSVOLTTM POPTM

E²CMOS[™] PowerTrench[™]

FACTTM QSTM

 $\begin{array}{lll} \mathsf{FACT} \ \mathsf{Quiet} \ \mathsf{Series^{\mathsf{TM}}} & \mathsf{Quiet} \ \mathsf{Series^{\mathsf{TM}}} \\ \mathsf{FAST}^{\otimes} & \mathsf{SuperSOT^{\mathsf{TM}}}\text{-}3 \\ \mathsf{FASTr^{\mathsf{TM}}} & \mathsf{SuperSOT^{\mathsf{TM}}}\text{-}6 \\ \mathsf{GTO^{\mathsf{TM}}} & \mathsf{SuperSOT^{\mathsf{TM}}}\text{-}8 \\ \mathsf{HiSeC^{\mathsf{TM}}} & \mathsf{TinyLogic^{\mathsf{TM}}} \end{array}$

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.