

REPETITIVE AVALANCHE AND dv/dt RATED HEXFET® TRANSISTOR

IRHM7460SE

N-CHANNEL SINGLE EVENT EFFECT (SEE) RAD HARD

500 Volt, 0.32Ω, (SEE) RAD HARD HEXFET

International Rectifier's (SEE) RAD HARD technology HEXFETs demonstrate virtual immunity to SEE failure. Additionally, under **identical** pre- and post-radiation test conditions, International Rectifier's RAD HARD HEXFETs retain **identical** electrical specifications up to 1×10^5 Rads (Si) total dose. No compensation in gate drive circuitry is required. These devices are also capable of surviving transient ionization pulses as high as 1×10^{12} Rads (Si)/Sec, and return to normal operation within a few microseconds. Since the SEE process utilizes International Rectifier's patented HEXFET technology, the user can expect the highest quality and reliability in the industry.

RAD HARD HEXFET transistors also feature all of the well-established advantages of MOSFETs, such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

They are well-suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high-energy pulse circuits in space and weapons environments.

Product Summary

Part Number	BV _{DSS}	R _{DS(on)}	I _D
IRHM7460SE	500V	0.32Ω	18.8A

Features:


- Radiation Hardened up to 1×10^5 Rads (Si)
- Single Event Burnout (SEB) Hardened
- Single Event Gate Rupture (SEGR) Hardened
- Gamma Dot (Flash X-Ray) Hardened
- Neutron Tolerant
- Identical Pre- and Post-Electrical Test Conditions
- Repetitive Avalanche Rating
- Dynamic dv/dt Rating
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Electrically Isolated
- Ceramic Eyelets

Absolute Maximum Ratings


Pre-Radiation

	Parameter	IRHM7460SE	Units
I _D @ V _{GS} = 12V, T _C = 25°C	Continuous Drain Current	18.8	A
I _D @ V _{GS} = 12V, T _C = 100°C	Continuous Drain Current	11.9	
I _{DM}	Pulsed Drain Current ①	75.2	
P _D @ T _C = 25°C	Max. Power Dissipation	250	W
	Linear Derating Factor	2.0	W/K ⑤
V _{GS}	Gate-to-Source Voltage	±20	V
EAS	Single Pulse Avalanche Energy ②	500	mJ
I _{AR}	Avalanche Current ①	18.8	A
E _{AR}	Repetitive Avalanche Energy ①	25	mJ
dv/dt	Peak Diode Recovery dv/dt ③	3.5	V/ns
T _J	Operating Junction	-55 to 150	°C
T _{STG}	Storage Temperature Range		
	Lead Temperature	300 (0.063 in. (1.6 mm) from case for 10s)	
	Weight	9.3 (typical)	g

Electrical Characteristics @ Tj = 25°C (Unless Otherwise Specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
BVDSS	Drain-to-Source Breakdown Voltage	500	—	—	V	VGS = 0V, ID = 1.0 mA
ΔBVDSS/ΔTj	Temperature Coefficient of Breakdown Voltage	—	0.68	—	V/°C	Reference to 25°C, ID = 1.0 mA
RDS(on)	Static Drain-to-Source	—	—	0.32	Ω	VGS = 12V, ID = 11.9A VGS = 12V, ID = 18.8A ④
	On-State Resistance	—	—	0.36		
VGS(th)	Gate Threshold Voltage	2.5	—	4.5	V	VDS = VGS, ID = 1.0 mA
gfs	Forward Transconductance	3	—	—	S (r)	VDS > 15V, IDS = 11.9A ④
IDSS	Zero Gate Voltage Drain Current	—	—	50	μA	VDS = 0.8 x Max Rating, VGS = 0V VDS = 0.8 x Max Rating VGS = 0V, Tj = 125°C
		—	—	250		
IGSS	Gate-to-Source Leakage Forward	—	—	100	nA	VGS = 20V
IGSS	Gate-to-Source Leakage Reverse	—	—	-100	nA	VGS = -20V
Qg	Total Gate Charge	—	—	260	nC	VGS = 12V, ID = 18.8A VDS = Max. Rating x 0.5
Qgs	Gate-to-Source Charge	—	—	40		
Qgd	Gate-to-Drain (“Miller”) Charge	—	—	200		
td(on)	Turn-On Delay Time	—	—	45	ns	VDD = 250V, ID = 18.8A, RG = 2.35Ω
tr	Rise Time	—	—	140		
td(off)	Turn-Off Delay Time	—	—	140		
tf	Fall Time	—	—	110		
LD	Internal Drain Inductance	—	8.7	—	nH	Measured from the drain lead, 6mm (0.25 in.) from package to center of die. Modified MOSFET symbol showing the internal inductances. 
LS	Internal Source Inductance	—	8.7	—		
Ciss	Input Capacitance	—	6400	—	pF	VGS = 0V, VDS = 25V f = 1.0 MHz
Coss	Output Capacitance	—	1100	—		
Crss	Reverse Transfer Capacitance	—	375	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
IS	Continuous Source Current (Body Diode)	—	—	18.8	A	Modified MOSFET symbol showing the integral reverse p-n junction rectifier. 
ISM	Pulse Source Current (Body Diode) ①	—	—	75.2		
VSD	Diode Forward Voltage	—	—	1.8	V	Tj = 25°C, IS = 18.8A, VGS = 0V ④
trr	Reverse Recovery Time	—	—	1200	ns	Tj = 25°C, IF = 18.8A, di/dt ≤ 100A/μs
QRR	Reverse Recovery Charge	—	—	16	μC	VDD ≤ 50V ④
ton	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by LS + LD.				

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
RthJC	Junction-to-Case	—	—	0.50	K/W ⑤	Typical socket mount
RthJA	Junction-to-Ambient	—	—	48		
RthCS	Case-to-Sink	—	0.21	—		

Radiation Performance of Rad Hard HEXFETs

International Rectifier Radiation Hardened HEXFETs are tested to verify their hardness capability. The hardness assurance program at International Rectifier uses two radiation environments.

Every manufacturing lot is tested in a low dose rate (total dose) environment per MIL-STD-750, test method 1019. International Rectifier has imposed a standard gate voltage of 12 volts per note 6 and a V_{DSS} bias condition equal to 80% of the device rated voltage per note 7. Pre- and post-radiation limits of the devices irradiated to 1 x 10⁵ Rads (Si) are identical and are presented in Table 1, column 1. The values in Table 1 will be met for either of the two low dose rate test circuits that are used. Both pre-

and post-radiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison. It should be noted that at a radiation level of 1 x 10⁵ Rads (Si), no change in limits are specified in DC parameters.

High dose rate testing may be done on a special request basis, using a dose rate up to 1 x 10¹² Rads (Si)/Sec.

International Rectifier radiation hardened HEXFETs have been characterized in neutron and heavy ion Single Event Effects (SEE) environments. Single Event Effects characterization is shown in Table 3.

Table 1. Low Dose Rate ⑥ ⑦

Parameter		IRHM7460SE		Units	Test Conditions ⑩
		100K Rads (Si)			
		min.	max.		
B _V D _{SS}	Drain-to-Source Breakdown Voltage	500	—	V	V _{GS} = 0V, I _D = 1.0 mA
V _{GS(th)}	Gate Threshold Voltage ④	2.5	4.5		V _{GS} = V _{DSS} , I _D = 1.0 mA
I _{GSS}	Gate-to-Source Leakage Forward	—	100	nA	V _{GS} = 20V
I _{GSS}	Gate-to-Source Leakage Reverse	—	-100		V _{GS} = -20V
I _{DSS}	Zero Gate Voltage Drain Current	—	50	μA	V _{DS} = 0.8 x Max Rating, V _{GS} = 0V
R _{DS(on)1}	Static Drain-to-Source ④ On-State Resistance One	—	0.32	Ω	V _{GS} = 12V, I _D = 11.9A
V _{SD}	Diode Forward Voltage ④	—	1.8	V	T _C = 25°C, I _S = 18.8A, V _{GS} = 0V

Table 2. High Dose Rate ⑧

Parameter		10 ¹¹ Rads (Si)/sec			10 ¹² Rads (Si)/sec			Units	Test Conditions
		Min.	Typ.	Max.	Min.	Typ.	Max.		
V _{DSS}	Drain-to-Source Voltage	—	—	400	—	—	400	V	Applied drain-to-source voltage during gamma-dot
I _{PP}		—	7	—	—	7	—	A	Peak radiation induced photo-current
di/dt		—	16	—	—	2.3	—	A/μsec	Rate of rise of photo-current
L ₁		—	27	—	—	133	—	μH	Circuit inductance required to limit di/dt

Table 3. Single Event Effects ⑨

Parameter	Typ.	Units	Ion	LET (Si) (MeV/mg/cm ²)	Fluence (ions/cm ²)	Range (μm)	V _{DS} Bias (V)	V _{GS} Bias (V)
B _V D _{SS}	500	V	Ni	28	1 x 10 ⁵	~35	400	-5



IRHM7460SE Device

- ① Repetitive Rating; Pulse width limited by maximum junction temperature. Refer to current HEXFET reliability report.
- ② @ $V_{DD} = 50V$, Starting $T_J = 25^\circ C$,
 $E_{AS} = [0.5 * L * (I_L^2) * [BV_{DSS}/(BV_{DSS}-V_{DD})]$
 Peak $I_L = 18.8A$, $V_{GS} = 12V$, $25 \leq R_G \leq 200\Omega$
- ③ $I_{SD} \leq 18.8A$, $di/dt \leq 170 A/\mu s$,
 $V_{DD} \leq BV_{DSS}$, $T_J \leq 150^\circ C$
 Suggested $R_G = 2.35\Omega$
- ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$
- ⑤ $K/W = ^\circ C/W$
 $W/K = W/^\circ C$


Radiation Characteristics

- ⑥ **Total Dose Irradiation with V_{GS} Bias.**
 12 volt V_{GS} applied and $V_{DS} = 0$ during irradiation per MIL-STD-750, method 1019.
- ⑦ **Total Dose Irradiation with V_{DS} Bias.**
 $V_{DS} = 0.8$ rated BV_{DSS} (pre-radiation) applied and $V_{GS} = 0$ during irradiation per MIL-STD-750, method 1019.
- ⑧ This test is performed using a flash x-ray source operated in the e-beam mode (energy ~ 2.5 MeV), 30 nsec pulse.
- ⑨ Process characterized by independent laboratory.
- ⑩ All Pre-Radiation and Post-Radiation test conditions are **identical** to facilitate direct comparison for circuit applications.

Case Outline and Dimensions - TO254AA

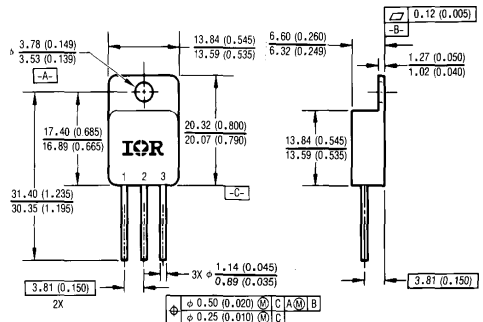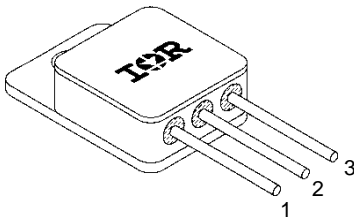

Conforms to JEDEC Outline TO-254AA

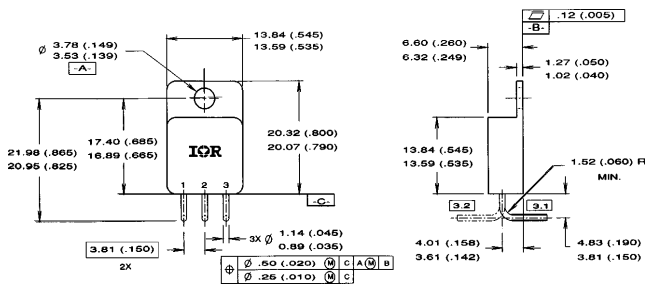

Optional Leadforms for Outline TO-254AA

Legend: 1 Drain
 2 Source
 3 Gate

Notes: 1. Dimensioning and tolerancing per ANSI Y14.5M-1982
 2. All dimensions are shown in millimeters (inches).
 3. Optional leadforms available in either orientation

CAUTION

BERYLLIUM WARNING PER MIL-PRF-19500

Packages containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxides packages shall not be placed in acids that will produce fumes containing beryllium.

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020

IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897

IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590

IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111

IR FAR EAST: K&H Bldg., 2F, 3-30-4 Nishi-Ikeburo 3-Chome, Toshima-Ki, Tokyo Japan 171 Tel: 81 3 3983 0086

IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371

<http://www.irf.com/>

Data and specifications subject to change without notice.

6/96

International
IR Rectifier