


# Surface Mount LED Lamps

## FEATURES

- Compatible with Automatic Placement Equipment
- Packaged in 12.0mm Tape on 7" Diameter Reels
- Surface Mount LED Lamp
- Long Life Solid State Reliability

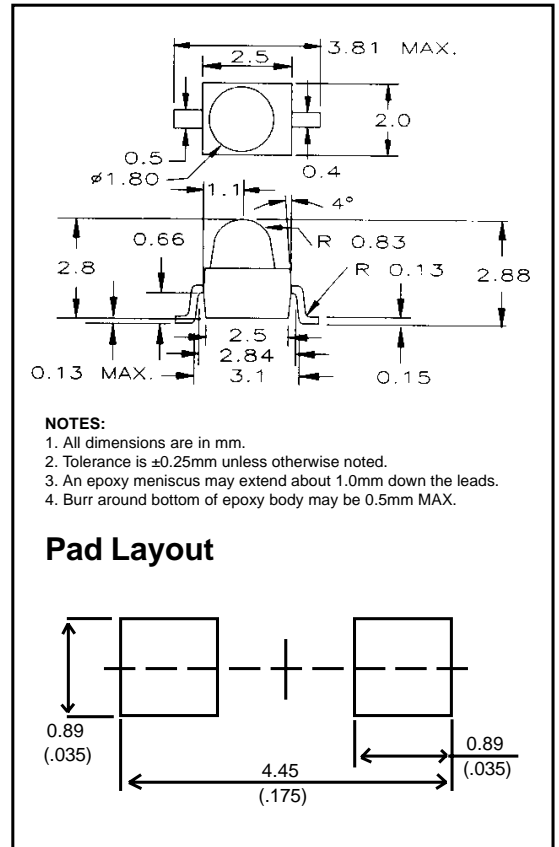

## OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Part Number	Color	Material	Package	Lens Color	Peak Wave Length	Luminous Intensity (mcd)			Forward Voltage (V)			Viewing Angle
					nm	min.	typ.	@mA	typ.	max.	@mA	typ.
MTSM3302AG-UY	YELLOW	InGaAlP ON GaAs	Gull Wing	Water Clear	593	314.2	523.7	20	2.1	2.4	20	36°
MTSMJ302AG-UO	RED-ORANGE	InGaAlP ON GaAs	Gull Wing	Water Clear	621	212.0	354.0	20	2.1	2.4	20	36°
MTSM7302AG-UR	RED	GaAlAs ON GaAs	Gull Wing	Water Clear	660	142.0	236.0	20	1.9	2.5	20	36°
MTSM2302AG-UG	GREEN	GaP	Gull Wing	Water Clear	567	50	84	20	2.1	2.6	20	36°



120 Broadway • Menands, New York 12204  
Toll Free: (800) 98-4LEDS • Fax: (518) 432-7454