


Ultrafast Recovery Modules

UFT100, 101 & 102

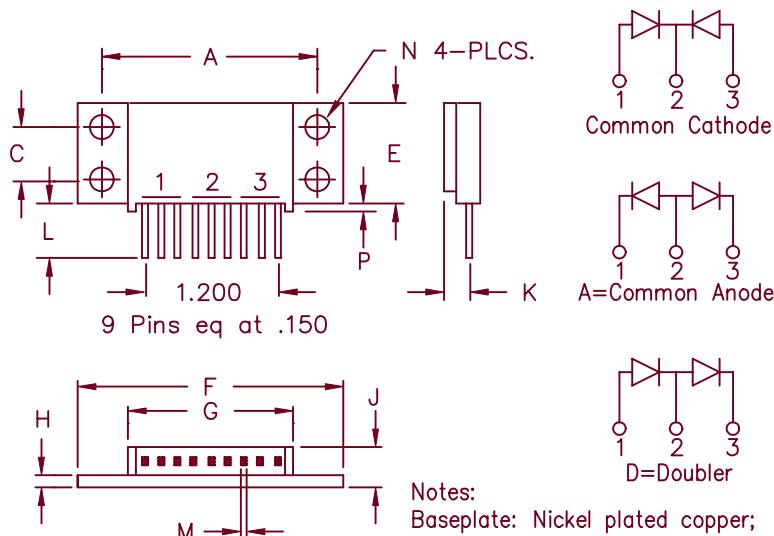

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.995	2.005	50.67	50.93	
C	0.495	0.506	12.57	12.83	
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.490	1.510	37.85	38.35	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60 to Lead $\frac{1}{4}$	
L	0.490	0.510	12.45	12.95	
M	0.040	.050	1.02	1.27	Square
N	0.175	0.195	4.45	4.95	Dia
P	0.032	0.052	0.81	1.32	

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT10010*	100V	100V	100V
UFT10015*	150V	150V	150V
UFT10020*	200V	200V	200V
UFT10130*	300V	300V	300V
UFT10140*	400V	400V	400V
UFT10150*	500V	500V	500V
UFT10260*	600V	600V	600V
UFT10270*	700V	700V	700V
UFT10280*	800V	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 100 to 800 Volts
- Electrically isolated base
- 2 X 50 Amp current rating

Electrical Characteristics

	UFT100	UFT101	UFT102	
Average forward current per pkg	I _{F(AV)} 100A	I _{F(AV)} 100A	I _{F(AV)} 100A	Square Wave
Average forward current per leg	I _{F(AV)} 50A	I _{F(AV)} 50A	I _{F(AV)} 50A	Square Wave
Case Temperature	T _C 135°C	T _C 124°C	T _C 118°C	R _{θJC} = 0.85°C/W
Maximum surge current per leg	I _{FSM} 800A	I _{FSM} 700A	I _{FSM} 600A	8.3ms, half sine, T _J = 175°C
Max peak forward voltage per leg	V _{FM} .975V	V _{FM} 1.25V	V _{FM} 1.35V	I _{FM} = 70A, T _J = 25°C*
Max reverse recovery time per leg	t _{rr} 50ns	t _{rr} 60ns	t _{rr} 75ns	1/2A, 1A, 1/4A, T _J = 25°C
Max peak reverse current per leg	I _{RM} _____	I _{RM} 3.0ma	I _{RM} _____	V _{RRM} , T _J = 125°C*
Max peak reverse current per leg	I _{RM} _____	I _{RM} 25μA	I _{RM} _____	V _{RRM} , T _J = 25°C
Typical Junction capacitance	C _J 300pF	C _J 150pF	C _J 150pF	V _R = 10V, T _J = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance per leg	R _{θJC}	1.0°C/W Junction to case
Max thermal resistance per pkg	R _{θJC}	0.5°C/W Junction to case
Typical thermal resistance (greased)	R _{θCS}	0.1°C/W Case to sink
Mounting Torque		15-20 inch pounds
Weight		2.8 ounces (75 grams) typical

UFT100

Figure 1
Typical Forward Characteristics – Per Leg

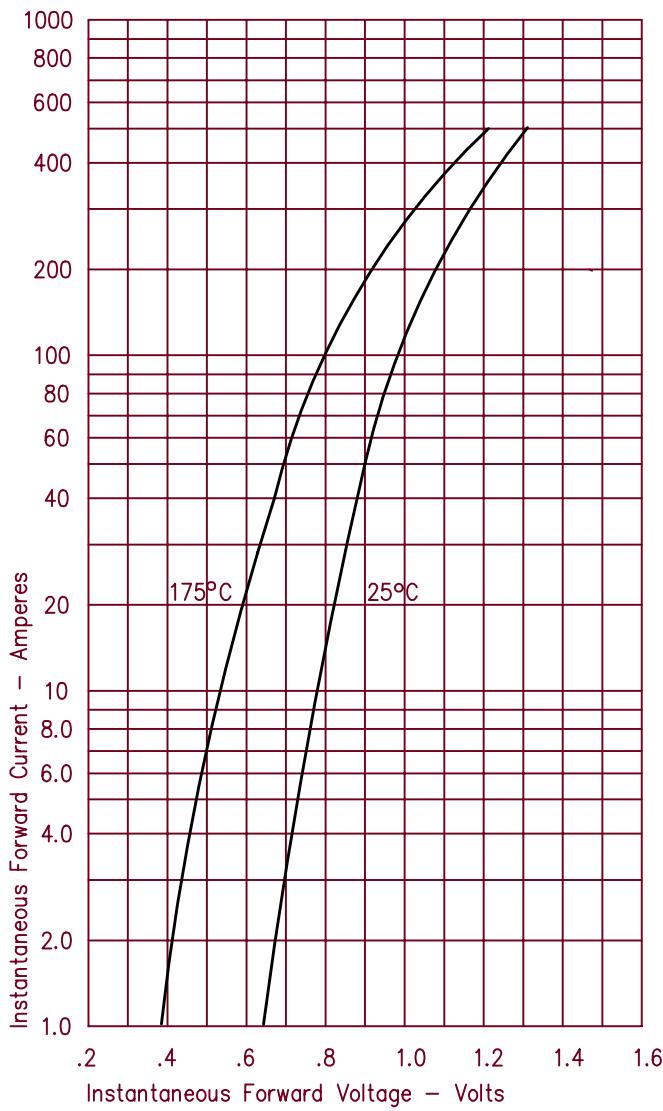


Figure 2
Typical Reverse Characteristics – Per Leg

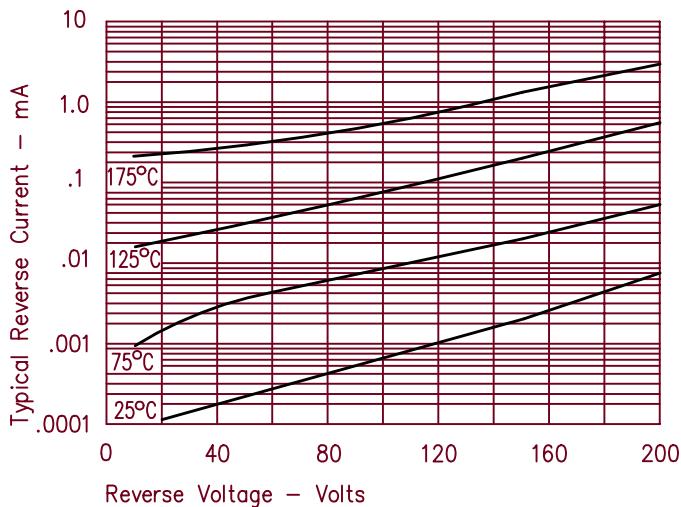


Figure 3
Typical Junction Capacitance – Per Leg

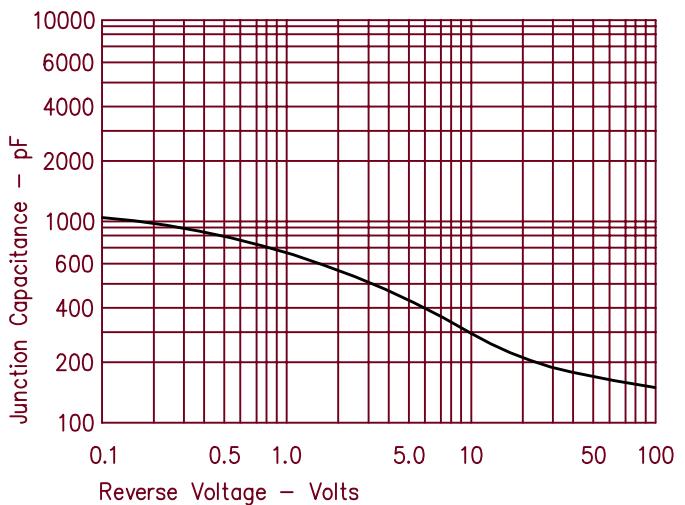


Figure 4
Forward Current Derating – Per Leg


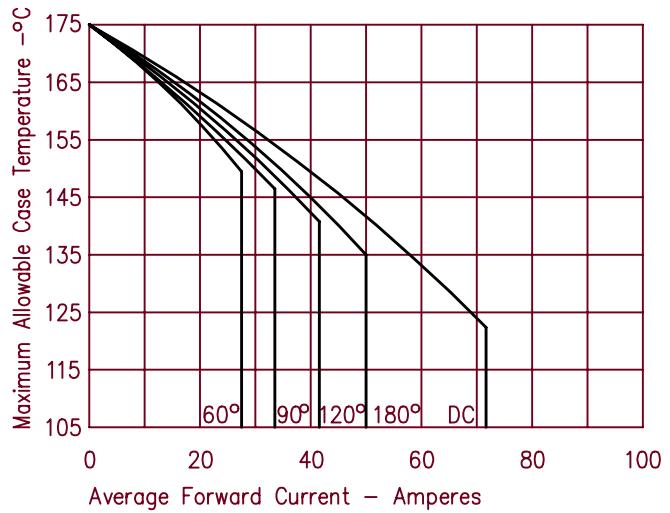


Figure 5
Maximum Forward Power Dissipation – Per Leg

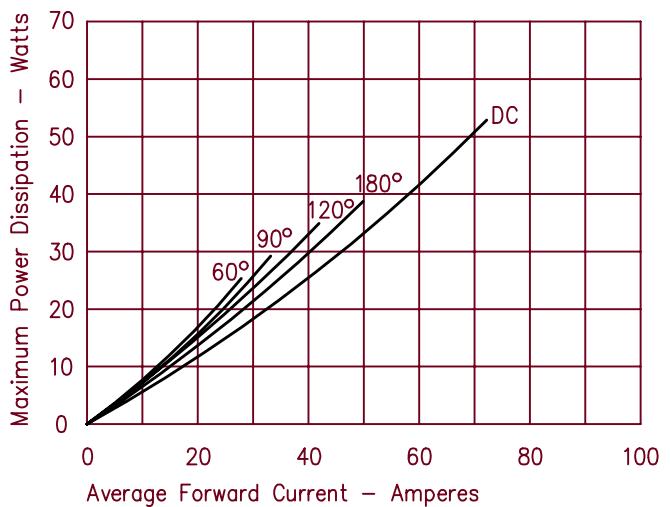

UFT101

Figure 1
Typical Forward Characteristics – Per Leg

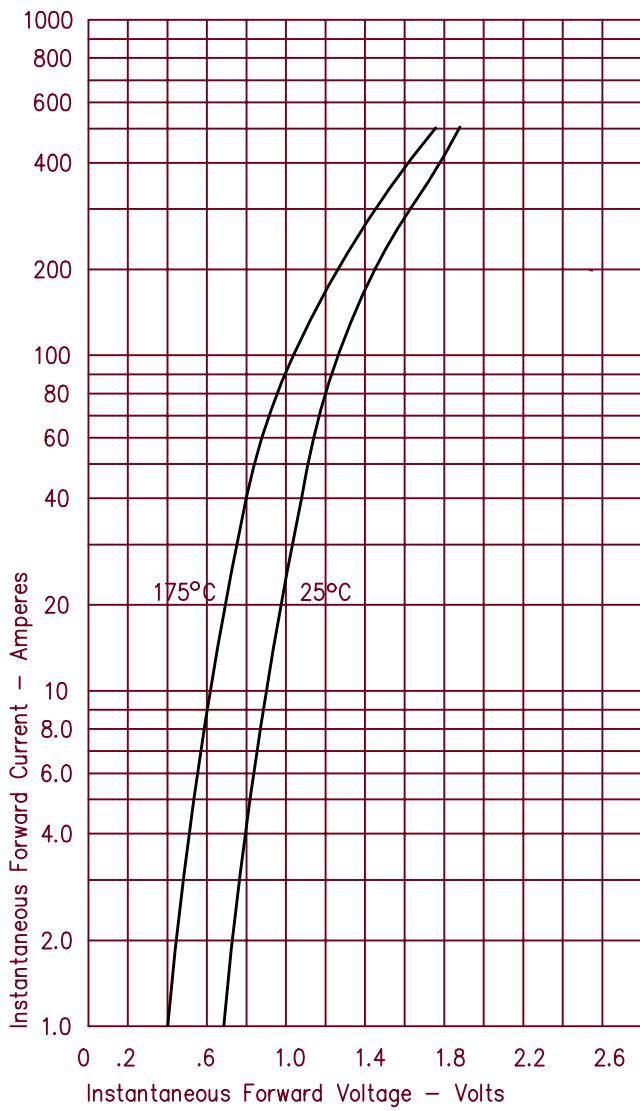


Figure 2
Typical Reverse Characteristics – Per Leg

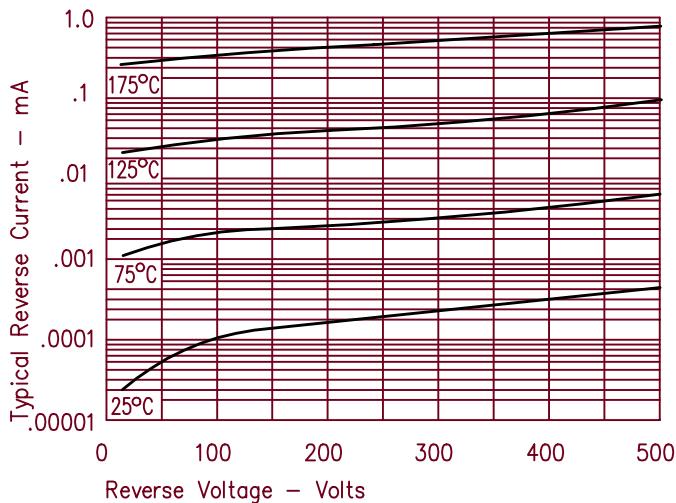


Figure 3
Typical Junction Capacitance – Per Leg

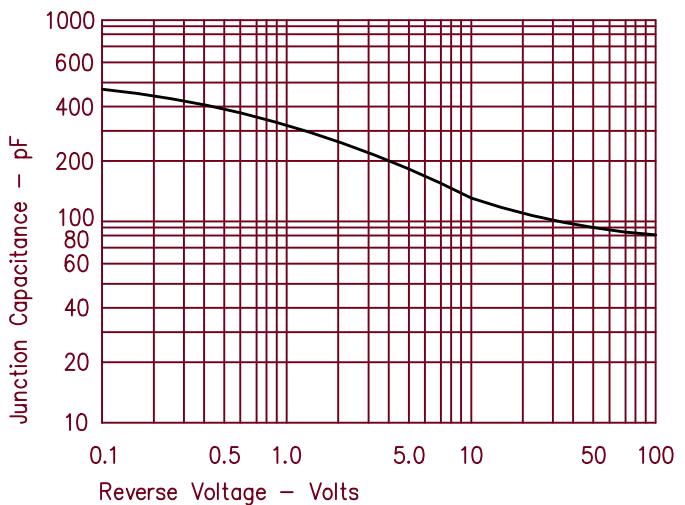


Figure 4
Forward Current Derating – Per Leg


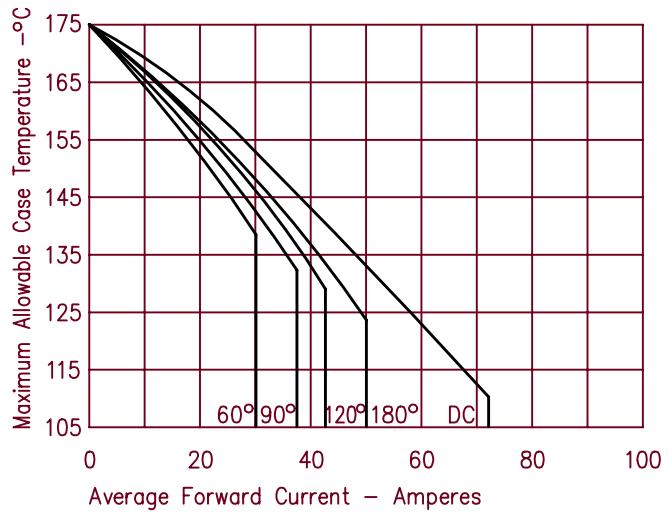


Figure 5
Maximum Forward Power Dissipation – Per Leg

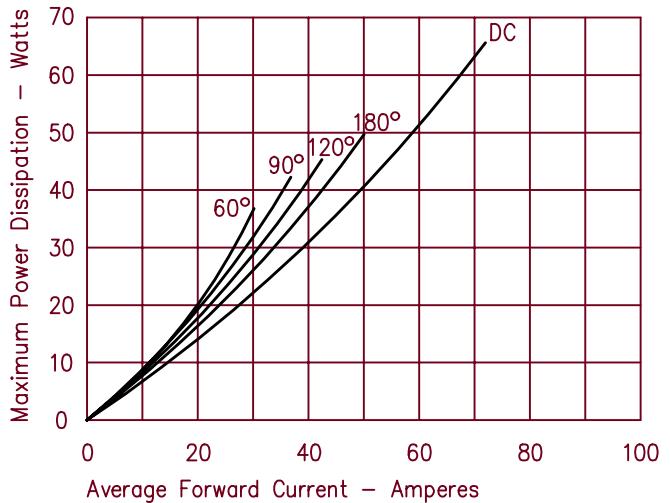

UFT102

Figure 1
Typical Forward Characteristics – Per Leg

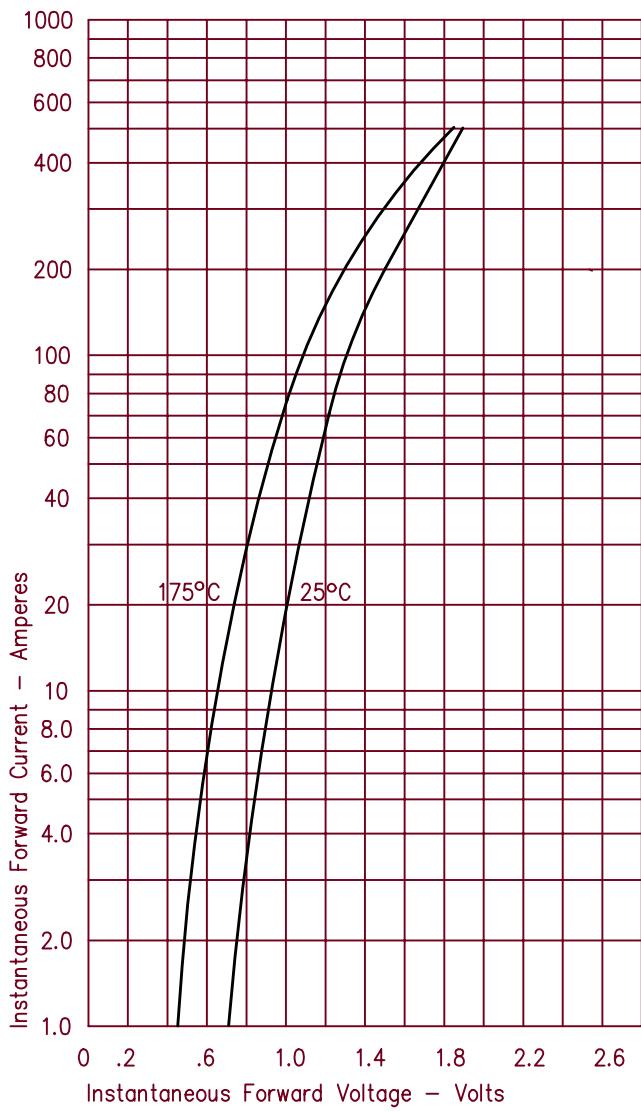


Figure 2
Typical Reverse Characteristics – Per Leg

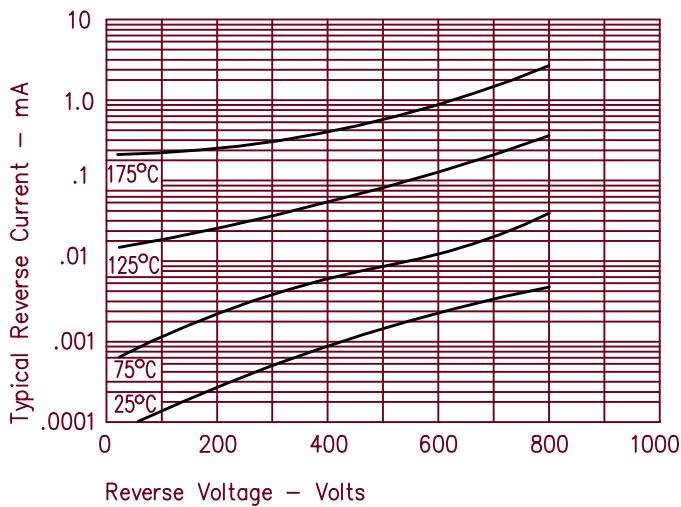


Figure 3
Typical Junction Capacitance – Per Leg

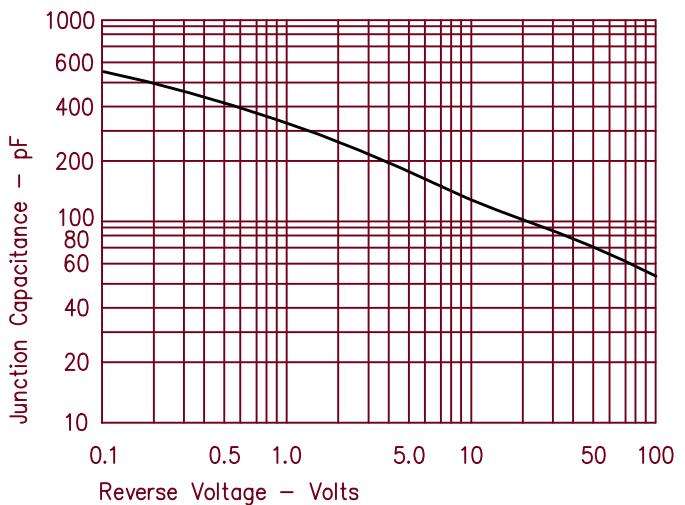


Figure 4
Forward Current Derating – Per Leg

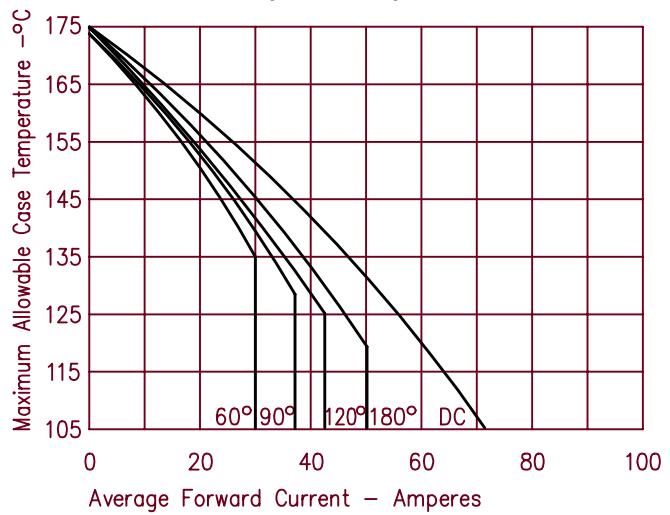


Figure 5
Maximum Forward Power Dissipation – Per Leg

