

## STANDARD CAPACITANCE TVS ARRAY

### APPLICATIONS

- ✓ RS-232, RS-422 & RS-423
- ✓ Cellular Phones
- ✓ Control & Monitoring Systems
- ✓ Portable Electronics
- ✓ Wireless Bus Protection

### IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 $\mu$ s - Level 2(Line-Ground) & Level 3(Line-Line)

### FEATURES

- ✓ ESD Protection > 40 kilovolts
- ✓ 500 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu$ s)
- ✓ Low Clamping Voltage
- ✓ Available in Multiple Voltage Types Ranging from 3V to 36V
- ✓ Unidirectional & Bidirectional Configurations


### MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOT-23
- ✓ Weight 0.6 grams (Approximate)
- ✓ Flammability rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Device Marking: Marking Code

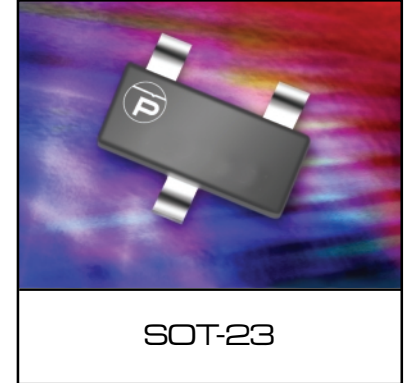


### PIN CONFIGURATION

UNIDIRECTIONAL



BIDIRECTIONAL



## DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	500	Watts
Operating Temperature	$T_J$	-55°C to 150°C	°C
Storage Temperature	$T_{STG}$	-55°C to 150°C	°C
Forward Voltage @ 100mA, 300μs - Square Wave (Note 1)	$V_F$	1.5	Volts


**Note 1:** Applies to unidirectional devices only.

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER (See Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE
		$V_{WM}$ VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ $V_C$ VOLTS	@ 8/20μs $V_C @ I_{PP}$	@ $V_{WM}$ $I_D$ μA	@ 0V, 1 MHz $C_J$ pF
PSOT03	03	3.3	4.0	6.5	10.9V @ 43.0A	125	500
PSOT03C	03C	3.3	4.5	7.0	10.9V @ 43.0A	125	500
PSOT05	05	5.0	6.0	9.8	13.5V @ 42.0A	20	500
PSOT05C	05C	5.0	6.0	9.8	13.5V @ 42.0A	20	500
PSOT08	08	8.0	8.5	13.4	16.9V @ 34.0A	10	500
PSOT08C	08C	8.0	8.5	13.4	16.9V @ 34.0A	10	500
PSOT12	12	12.0	13.3	19.0	25.9V @ 21.0A	2	500
PSOT12C	12C	12.0	13.3	19.0	25.9V @ 21.0A	2	500
PSOT15	15	15.0	16.7	24.0	30.0V @ 17.0A	1	500
PSOT15C	15C	15.0	16.7	24.0	30.0V @ 17.0A	1	500
PSOT24	24	24.0	26.7	43.0	49.0V @ 12.0A	1	500
PSOT24C	24C	24.0	26.7	43.0	49.0V @ 12.0A	1	500
PSOT36	36	36.0	40.0	51.0	76.8V @ 9.0A	1	500
PSOT36C	36C	36.0	40.0	51.0	76.8V @ 9.0A	1	500


**Note 1:** Part numbers with an additional "C" suffix are bidirectional devices, i.e., PSOT05C.

GRAPHS


**FIGURE 1**  
**PEAK PULSE POWER VS PULSE TIME**

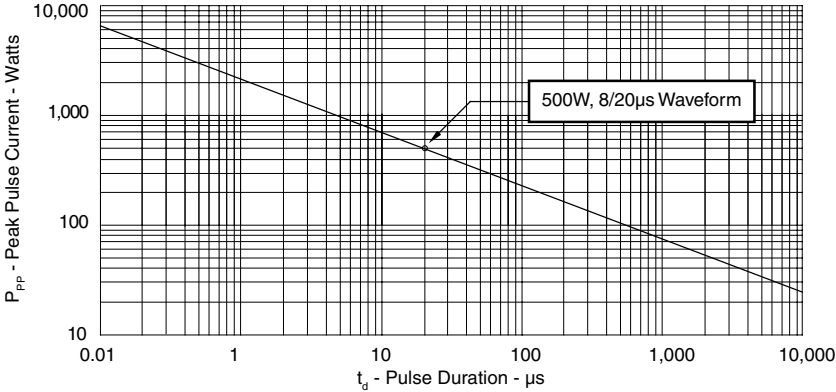

**FIGURE 2**  
**PULSE WAVE FORM**

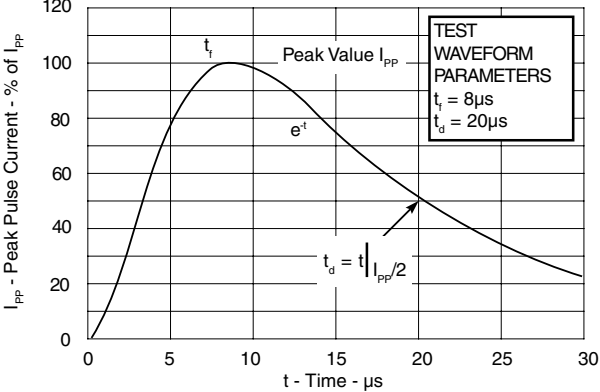


**FIGURE 3**  
**POWER DERATING CURVE**

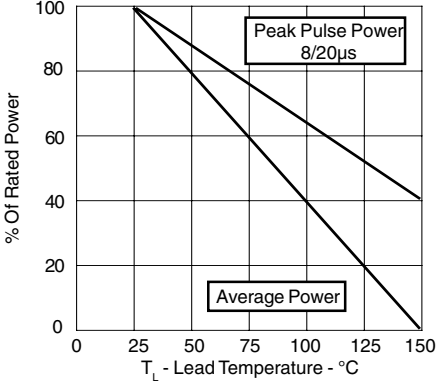

## PACKAGE OUTLINE & DIMENSIONS

### PACKAGE OUTLINE

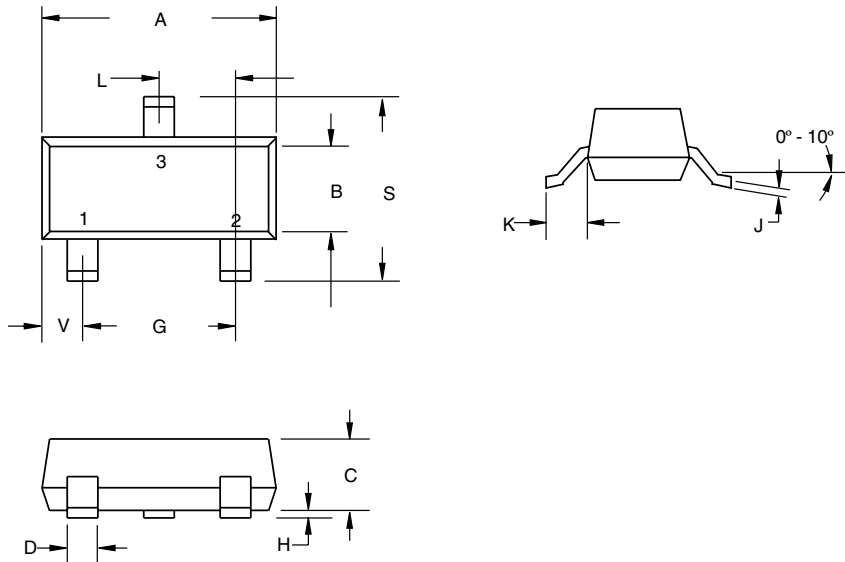


### SOT-23



### PACKAGE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.1102	0.1197
B	1.20	1.40	0.0472	0.0551
C	0.89	1.11	0.0350	0.0440
D	0.37	0.50	0.0150	0.0200
G	1.78	2.04	0.0701	0.0807
H	0.013	0.100	0.0005	0.0040
J	0.085	0.177	0.0034	0.0070
K	0.45	0.60	0.0180	0.0236
L	0.89	1.02	0.0350	0.0401
S	2.10	2.50	0.0830	0.0984
V	0.45	0.60	0.0177	0.0236

### MOUNTING PAD

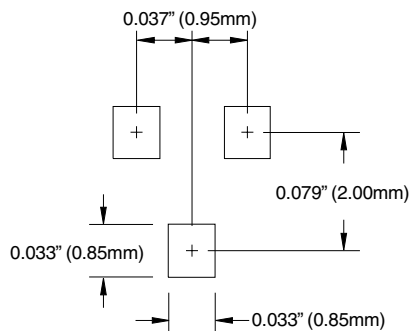

### NOTES

1. Dimensioning and tolerances per ANSI Y14.5M, 1985.
2. Controlling Dimension: Inches
3. Pin 3 is the cathode (Unidirectional Only).
4. Dimensions are exclusive of mold flash and metal burrs.

### TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA-481.
2. Suffix -T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., *PSOT05-T7*.
3. Suffix -T13 = 13 Inch Reel - 10,000 pieces per 8mm tape, i.e., *PSOT05-T13*.

Outline & Dimensions: Rev 1 - 11/01, 06012

**COPYRIGHT © ProTek Devices 2003**

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

### ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)

Web Site: [www.protekdevices.com](http://www.protekdevices.com)