

# FS2ASJ-3

HIGH-SPEED SWITCHING USE


## FS2ASJ-3



- 4V DRIVE
- $V_{DSS}$  ..... 150V
- $r_{DS(ON)}(MAX)$  .....  $0.75\Omega$
- $I_D$  ..... 2A
- Integrated Fast Recovery Diode (TYP.) ..... 65ns

## OUTLINE DRAWING

Dimensions in mm

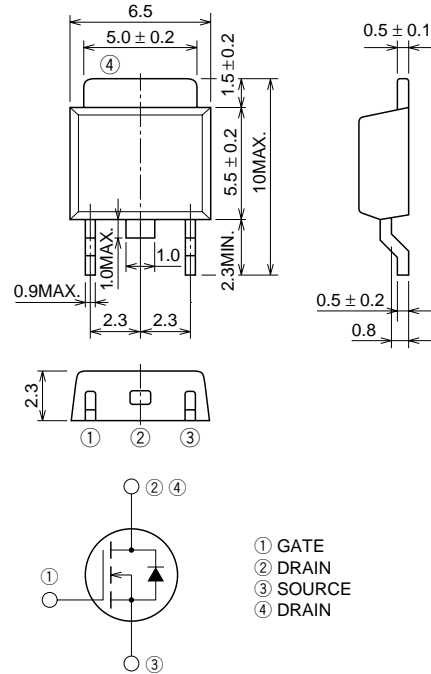

## APPLICATION

Motor control, Lamp control, Solenoid control  
DC-DC converter, etc.

## MAXIMUM RATINGS (Tc = 25°C)


Symbol	Parameter	Conditions	Ratings	Unit
$V_{DSS}$	Drain-source voltage	$V_{GS} = 0V$	150	V
$V_{GSS}$	Gate-source voltage	$V_{DS} = 0V$	$\pm 20$	V
$I_D$	Drain current		2	A
$I_{DM}$	Drain current (Pulsed)		8	A
$I_{DA}$	Avalanche drain current (Pulsed)	$L = 100\mu H$	2	A
$I_S$	Source current		2	A
$I_{SM}$	Source current (Pulsed)		8	A
$P_D$	Maximum power dissipation		20	W
$T_{ch}$	Channel temperature		-55 ~ +150	°C
$T_{stg}$	Storage temperature		-55 ~ +150	°C
—	Weight	Typical value	0.26	g

**ELECTRICAL CHARACTERISTICS** (Tch = 25°C)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V(BR)DSS	Drain-source breakdown voltage	ID = 1mA, VGS = 0V	150	—	—	V
IGSS	Gate-source leakage current	VGS = ±20V, VDS = 0V	—	—	±0.1	μA
IDSS	Drain-source leakage current	VDS = 150V, VGS = 0V	—	—	0.1	mA
VGS(th)	Gate-source threshold voltage	ID = 1mA, VDS = 10V	1.0	1.5	2.0	V
rDS(ON)	Drain-source on-state resistance	ID = 1A, VGS = 10V	—	0.58	0.75	Ω
rDS(ON)	Drain-source on-state resistance	ID = 1A, VGS = 4V	—	0.61	0.81	Ω
VDS(ON)	Drain-source on-state voltage	ID = 1A, VGS = 10V	—	0.58	0.75	V
yfs	Forward transfer admittance	ID = 1A, VDS = 5V	—	4.5	—	S
Ciss	Input capacitance	VDS = 10V, VGS = 0V, f = 1MHz	—	360	—	pF
Coss	Output capacitance		—	62	—	pF
Crss	Reverse transfer capacitance		—	16	—	pF
td(on)	Turn-on delay time	VDD = 80V, ID = 1A, VGS = 10V, RGEN = RGS = 50Ω	—	11	—	ns
tr	Rise time		—	9	—	ns
td(off)	Turn-off delay time		—	35	—	ns
tf	Fall time		—	13	—	ns
VSD	Source-drain voltage	IS = 1A, VGS = 0V	—	1.0	1.5	V
Rth(ch-c)	Thermal resistance	Channel to case	—	—	6.25	°C/W
trr	Reverse recovery time	IS = 2A, dis/dt = -100A/μs	—	65	—	ns

**PERFORMANCE CURVES**


**POWER DISSIPATION DERATING CURVE**

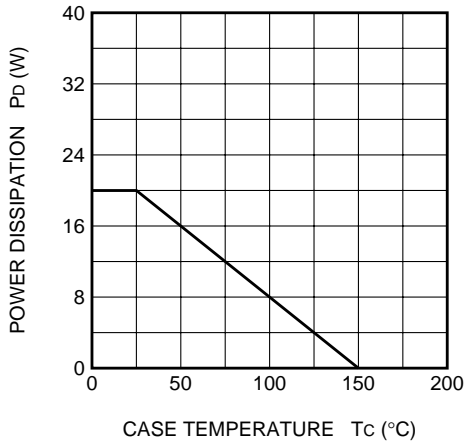


**MAXIMUM SAFE OPERATING AREA**

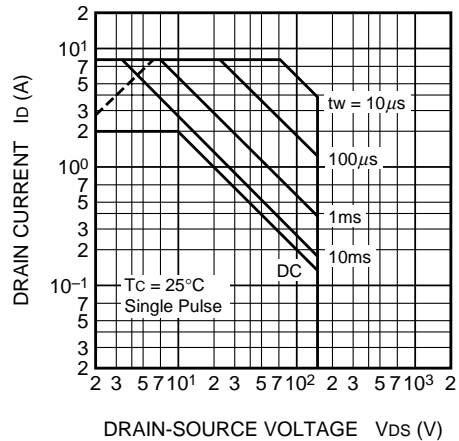


**OUTPUT CHARACTERISTICS (TYPICAL)**

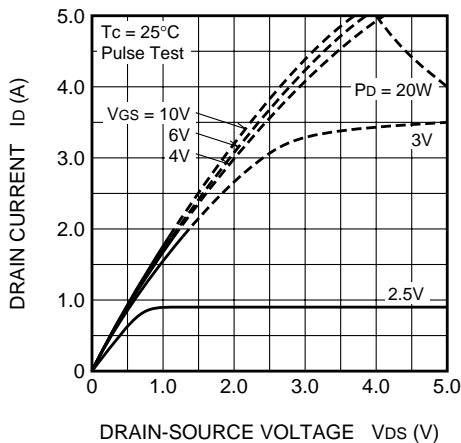


**OUTPUT CHARACTERISTICS (TYPICAL)**

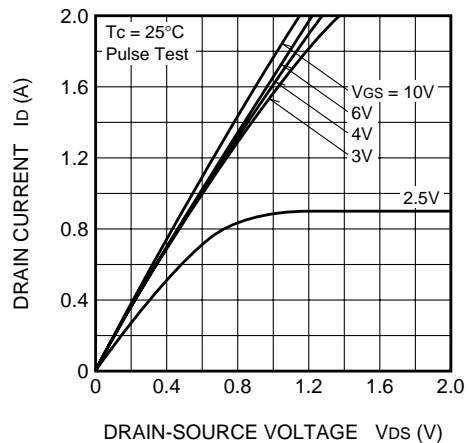


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

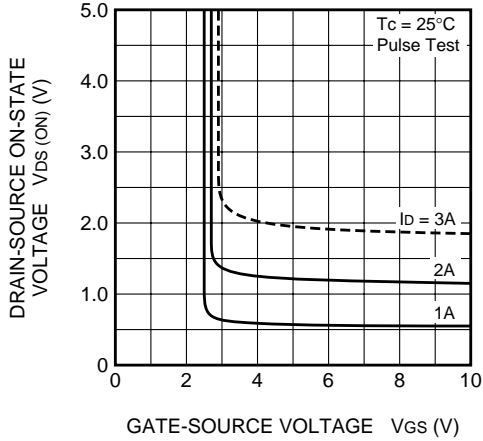


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

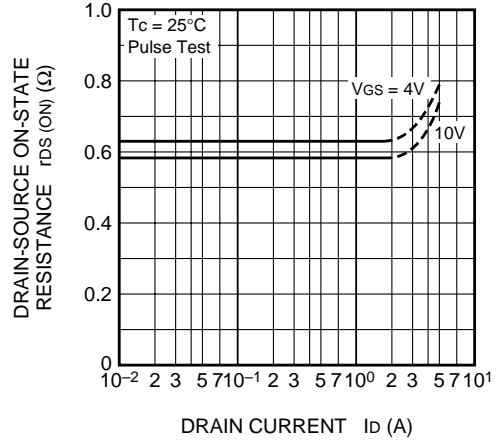


TRANSFER CHARACTERISTICS (TYPICAL)

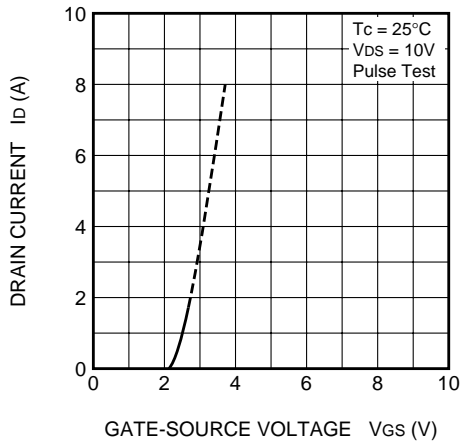


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

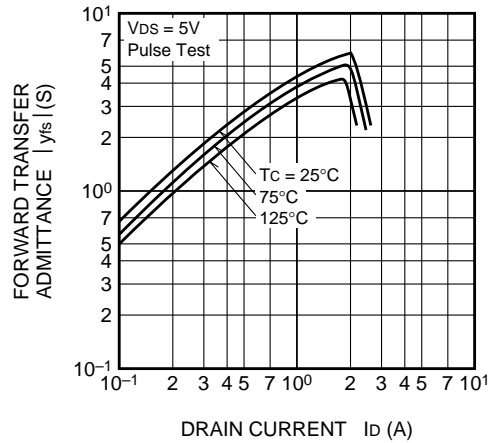


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

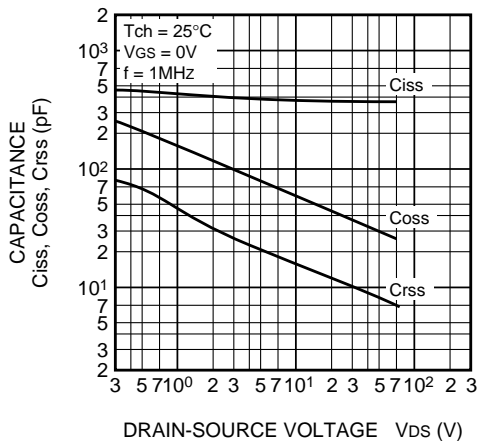


SWITCHING CHARACTERISTICS (TYPICAL)

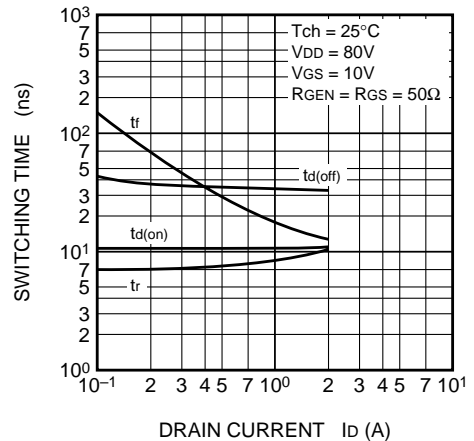


GATE-SOURCE VOLTAGE VS. GATE CHARGE (TYPICAL)

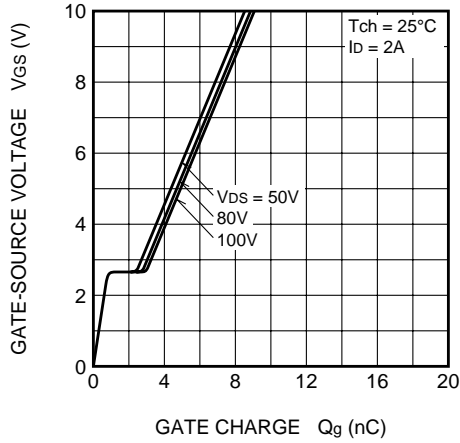


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

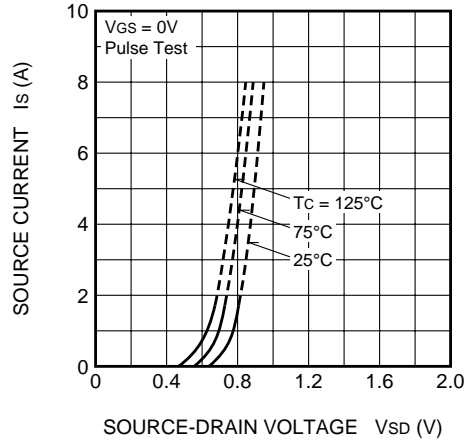


ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

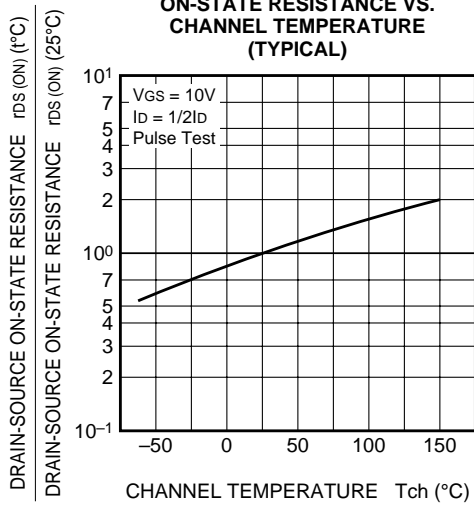

THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

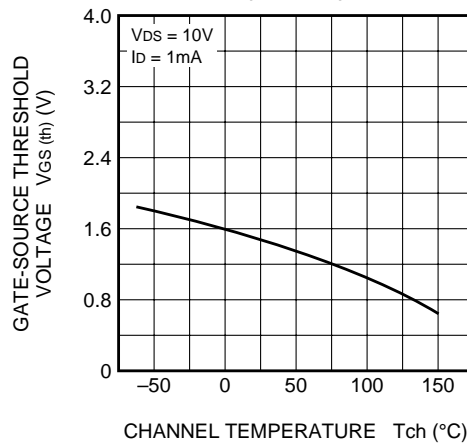

BREAKDOWN VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

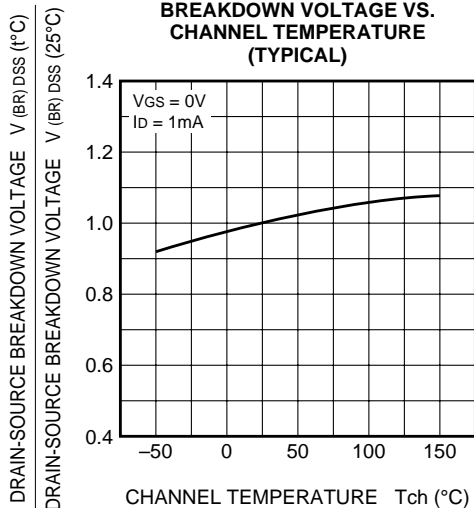

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

