

June 7, 1999

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

DESCRIPTION


The EZ1083 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the EZ1083 series provides excellent regulation over variations in line, load and temperature.

Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The EZ1083 has both fixed and adjustable voltage options, while the EZ1083B is adjustable only for cost sensitive applications. These devices are available in the popular TO-220 package.


APPLICATIONS

- High current microprocessor supplies
- Post regulators

BLOCK DIAGRAM

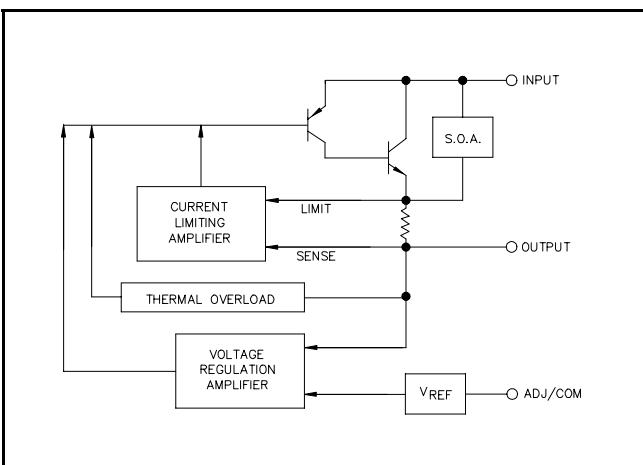

PIN CONFIGURATIONS

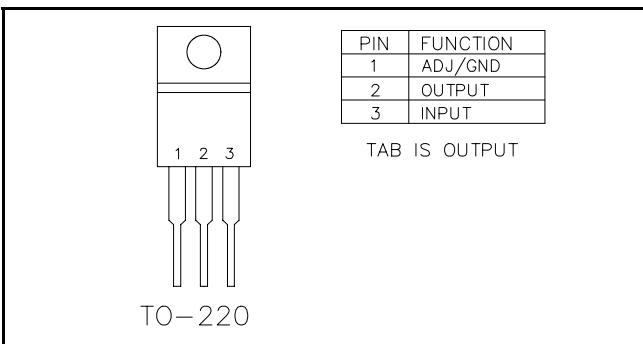

FEATURES

- Low dropout performance, 1.3V max. for EZ1083, 1.45V max. for EZ1083B
- Full current rating over line and temperature
- Fast transient response
- $\pm 2\%$ total output regulation over line, load and temperature ($\pm 2.4\%$ for EZ1083B)
- Adjust pin current max 90 μ A over temperature
- Fixed/adjustable output voltage (EZ1083)
- Line regulation typically 0.015%
- Load regulation typically 0.05%
- TO-220 package

ORDERING INFORMATION

DEVICE	PACKAGE	V _{OUT} VOLTS
EZ1083CT-X.X	TO-220	See Note (1)
EZ1083BCT		1.30 to 5.7

Note:

(1) Where X.X denotes voltage options. Available voltages are: 1.5V, 2.5V and 3.3V. Leave blank for adjustable version (1.3 to 5.7V). Contact factory for additional voltage options.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Maximum	Units
Input Supply Voltage	V _{IN}	7	V
Power Dissipation	P _D	Internally Limited	W
Thermal Resistance Junction to Case	θ _{JC}	2	°C/W
Thermal Resistance Junction to Ambient	θ _{JA}	50	°C/W
Operating Junction Temperature Range	T _J	0 to 125	°C
Storage Temperature Range	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	T _{LEAD}	260	°C



7.5 AMP POSITIVE VOLTAGE REGULATOR

EZ1083
EZ1083B

June 7, 1999

ELECTRICAL CHARACTERISTICS


Unless otherwise specified, Adj V_{IN} = 2.75V to 7.0V and Adj I_O = 10mA to 7.5A;
Fixed V_{IN} = 4.75 to 7.0V and Fixed I_O = 0 mA to 7.5A

		Test Conditions			Test Limits			
Parameter	Symbol	V_{IN}	I_O	$T_J^{(5)}$	Min	Typ	Max	Units
Output Voltage ⁽¹⁾ EZ1083-X.X	V_O	5V	0mA	25°C	0.99 V_O I	V_O	1.01 V_O I	V
				O.T.	0.98 V_O I	V_O	1.02 V_O I	
Reference Voltage ⁽¹⁾ EZ1083	V_{REF}	5V	10mA	25°C	1.238	1.250	1.262	V
				O.T.	1.225	1.250	1.275	
Reference Voltage ⁽¹⁾ EZ1083B	V_{REF}	5V	10mA	25°C	1.233	1.250	1.267	V
				O.T.	1.220	1.250	1.280	
Line Regulation ⁽¹⁾	$REG_{(LINE)}$		10mA	25°C		0.015	0.2	%
				O.T.		0.035	0.2	
Load Regulation ⁽¹⁾	$REG_{(LOAD)}$	5V		25°C		0.05	0.3	%
				O.T.		0.2	0.4	
Dropout Voltage ⁽²⁾ EZ1083, EZ1083-X.X EZ1083B	V_D			25°C		1		V
				O.T.		1.10	1.30	
						1.20	1.45	
Current Limit	I_{CL}			O.T.	7.5	9.5		A
Quiescent Current Fixed Voltage Version	I_Q	5V		O.T.		12	14	mA
Temperature Coefficient	T_C			O.T.		0.005		%/°C
Adjust Pin Current	I_{ADJ}			25°C		55		μA
				O.T.			90	
Adjust Pin Current Change	ΔI_{ADJ}			O.T.		0.2	5	μA
Temperature Stability	T_S	5V	0.5A	O.T.		0.5		%
Minimum Load Current Adj Voltage Version	I_O	5V		O.T.		5	10	mA
RMS Output Noise ⁽³⁾	V_N			25°C		0.003		% V_O
Ripple Rejection Ratio ⁽⁴⁾	R_A	5V	7.5A	O.T.	60	72		dB

NOTES:


- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2) ΔV_{OUT} , $\Delta V_{REF} = 1\%$.
- (3) Bandwidth of 10 Hz to 10 kHz.
- (4) 120 Hz input ripple (C_{ADJ} for ADJ = 25μF).
- (5) Over Temp. (O.T.) = over specified operating junction temperature range.

June 7, 1999

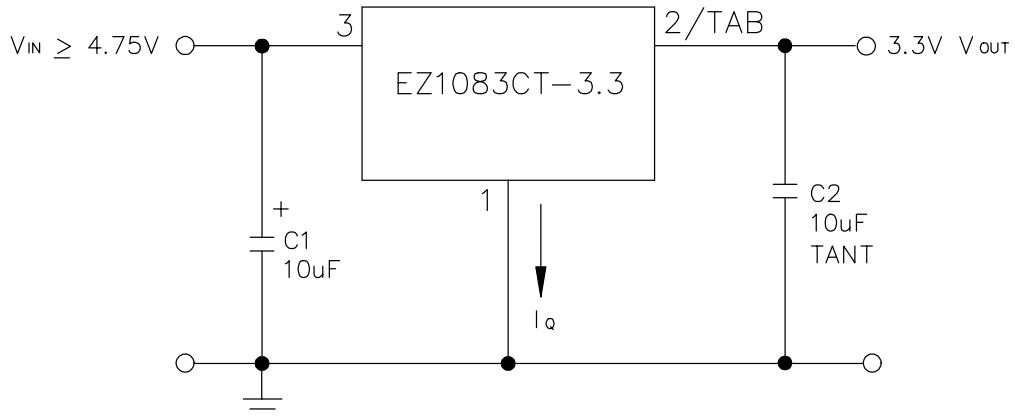TYPICAL APPLICATIONS
FIXED VOLTAGE REGULATOR⁽¹⁾⁽²⁾


(1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.

(2) C2 REQUIRED FOR STABILITY.

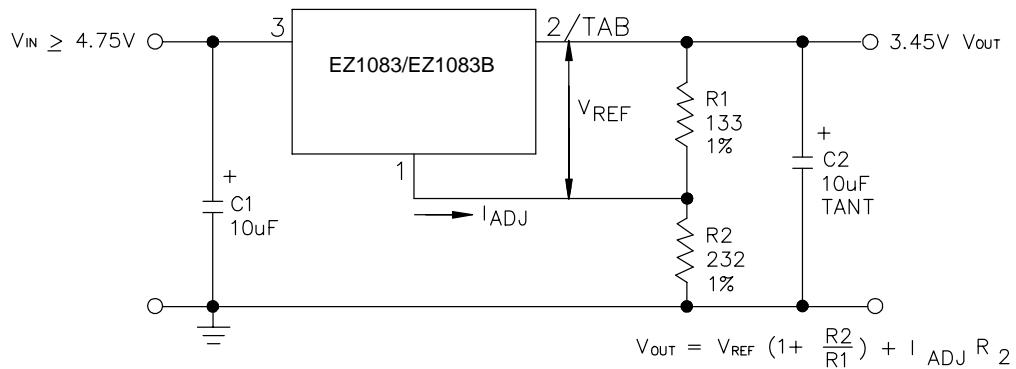
ADJUSTABLE VOLTAGE REGULATOR⁽¹⁾⁽²⁾


(1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.

(2) C2 REQUIRED FOR STABILITY.

June 7, 1999

OUTLINE - TO-220

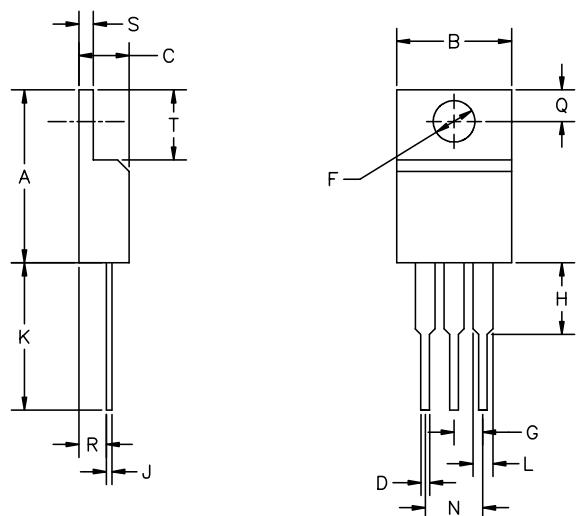

The diagram shows two views of the TO-220 package. The left view is a top-down cross-section with dimensions A (height), K (width), R (bottom width), J (bottom thickness), S (top lead thickness), C (top lead gap), T (top lead height), and a central vertical dimension. The right view is a side profile with dimensions B (width), F (lead thickness), Q (lead height), H (height from base to lead), G (lead gap), L (lead thickness), D (lead gap), and N (lead thickness).

DIM ^N	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.650	14.23	16.51	
B	.380	.420	9.66	10.66	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.54	4.08	
G	.090	.110	2.29	2.79	
H	—	.250	—	6.35	
J	.012	.045	.31	1.14	
K	.500	.580	12.70	14.73	
L	.070	.095	1.77	2.41	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.42	
R	.080	.115	2.04	2.92	
S	.020	.055	.51	1.39	
T	.230	.270	5.85	6.85	

JEDEC TO-220